



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Insured: Barbara Schacter
Property: 935 Chattanooga Ave.
Pacific Palisades, CA 90272

E-mail: barbara.palitalk@gmail.com

Claim Rep.: Jared Boergadine
Business: 11138 Aqua Vista St Suite 37
Los Angeles, CA 91602

Business: (818) 720-9345
E-mail: Jared@VIPClaimService.com

Estimator: Jared Boergadine
Business: 11138 Aqua Vista St Suite 37
Los Angeles, CA 91602

Business: (818) 720-9345
E-mail: Jared@VIPClaimService.com

Claim Number: 75-79D9-35K

Policy Number: 71-GF-E601-0

Type of Loss: WildFire

Date of Loss:
Date Inspected:

Date Received:
Date Entered: 7/28/2025 8:25 AM

Price List: CALA8X_JUL25
Restoration/Service/Remodel
Estimate: SCHACTER_RECON_6B



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

SCHACTER_RECON_6B

Demo/Mitigation

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
1. Cleaning (Bid Item) Per Initial SERVPRO Mitigation	1.00 EA		0.00	24,369.00	0.00	0.00	24,369.00
2. Hazardous Material Remediation (Bid Item) per Tri Tech Restoration	1.00 EA		0.00	144,844.03	0.00	0.00	144,844.03
Totals: Demo/Mitigation					0.00	0.00	169,213.03

General Items

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Permits & Fees:-----							
3. Limited Contamination Assessment Report per Vert Environmental - Project # 65409	1.00 EA		0.00	4,420.00	0.00	884.00	5,304.00
-----Site Conditions-----							
4. Temporary toilet (per month)	6.00 MO		0.00	225.00	0.00	270.00	1,620.00
5. Temporary hand washing station (per month)	6.00 MO		0.00	247.00	0.00	296.40	1,778.40
6. Dumpster load - Approx. 20 yards, 4 tons of debris	3.00 EA		783.00	0.00	0.00	469.80	2,818.80
7. Daily Job Site Clean Up Laborer & Runner - per hour	65.00 HR		0.00	65.19	0.00	847.48	5,084.83
30min per day for 5 days per week, 4 weeks per month for 6 months.							
8. Residential Supervision / Project Management - per hour	390.00 HR		0.00	86.09	0.00	6,715.02	40,290.12
On-Site Project Superintendent, a working supervisor will be needed on site for 3 hours per day for 4 weeks per month for 6 months totaling (3*5*26)							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - General Items

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
Supervision is required by the CSLB license requirements that the Qualified licensee or a manager inspect every job site each day until complete. Supervision is not covered in Xactimate's O&P according to Xactimate's white pages. .							
<i>"Cal. Admin. Code tit. 16, § 823(a). "Direct supervision and control" "includes any one or any combination of the following activities: supervising construction, managing construction activities by making technical and administrative decisions, checking jobs for proper workmanship, or direct supervision on construction job sites.</i>							
Section 7068 requires every license to have a qualifier, which may be a Sole Owner, Qualified Partner, Responsible Managing Officer (RMO), Responsible Managing Employee (RME), Responsible Managing Manager or Responsible Managing Member. The qualifier is the person who is listed in the Contractor State License Boards' (CSLB) personnel of record, has demonstrated his/her knowledge and experience through the CSLB's licensing process, and holds one or more license classifications.							
UPDATE: CSLB, CSLB to Get Tough on RMO Abuses (Summer 2014) Starting on January 1, 2014, amended Section 7068.1 of California's Contractors State License Law, Bus. & Prof. Code §§ 7200 <i>et seq.</i> , requires licensees' qualifiers to exercise direct supervision and control over the licensees' operations to ensure compliance with California's Contractors State License Law. The amended law contemplates active involvement by the qualifier, and makes a violation of Section 7068.1 grounds for disciplinary action and a misdemeanor punishable by imprisonment in a county jail and/or a fine.							
-----Masking-----							
9. Floor protection - heavy paper and tape	1,000.00 SF		0.00	0.71	6.83	143.36	860.19
For windows and door during painting							
10. Labor to tape drop cloths	1,100.00 SF		0.00	0.28	1.07	61.82	370.89
for exterior painting							
11. Floor protection - cloth - skid resistant leak proof	1,100.00 SF		0.00	1.11	41.83	252.56	1,515.39
Exterior drop clothes							
-----Final Cleaning-----							
12. Final cleaning - construction - Residential	1,897.79 SF		0.00	0.42	0.00	159.42	956.49
13. Clean door / window opening (per side)	56.00 EA		0.00	21.05	0.22	235.80	1,414.82
Totals: General Items					49.95	10,335.66	62,013.93

Insulation

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
14. R&R Batt insulation - 4" - R13 - unfaced batt	2,325.54 SF		0.37	1.30	176.86	812.12	4,872.63
Totals: Insulation					176.86	812.12	4,872.63

HVAC



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - HVAC

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
15. Heat, Vent, & Air Conditioning (Bid Item) - Per ADC Corp	1.00 EA		0.00	31,188.00	0.00	6,237.60	37,425.60
The line item applies to the HVAC repairs.							
Scope of work:							
Removal/Demolition							
• Remove all existing flexible ductwork (supply & return).							
• Temporary containment and protection as needed							
New Duct System							
• Install new R-8 flexible duct system (entire home).							
• New metal plenums where existing cannot be restored.							
• New register boots, collars, supports, straps, mastic, and foil tape.							
• New return duct assembly.							
• All work to meet or exceed Los Angeles County Mechanical Code.							
System Start-Up & Verification							
• Adjust and verify static pressure.							
• Verify airflow and sealing quality.							
• Final inspection, quality control, and before/after documentation.							
Equipment Package:							
• Goodman 5 Ton Condensing Unit (R-410A/A2L compliant)							
• Goodman Matching 5 Ton Evaporator Coil with TXV							
• Goodman 80% AFUE Gas Furnace with ECM blower							
Includes:							
• Removal & disposal of existing condenser, coil, and furnace							
• New refrigerant lines and fittings (flush or replace)							
• New condensate drain tie-in							
• New equipment pad & disconnect (if required)							
• Startup, evacuation, charge, commissioning, airflow verification							
Totals: HVAC					0.00	6,237.60	37,425.60

Electrical

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
16. Rewire\wire - avg. residence - boxes & wiring	1,897.79 SF		0.00	5.28	125.82	2,029.22	12,175.37
17. R&R Breaker panel - 150 amp w/arc fault breakers	1.00 EA		235.87	2,335.54	120.21	538.32	3,229.94
18. R&R Junction box	2.00 EA		23.61	165.70	2.21	76.16	456.99
19. R&R Smoke detector - High grade	9.00 EA		16.80	121.12	63.41	260.94	1,565.63
remove and replace the smoke detector during cleaning and paint. replacement is warranted due to smoke related corrosion							
20. R&R Carbon monoxide detector - High grade	1.00 EA		16.80	122.34	6.05	29.04	174.23
SCHACTER_RECON_6B						3/10/2026	Page: 4



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Electrical

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
remove and replace the carbon monoxide detector during cleaning and paint. replacement is warranted due to smoke related corrosion							
21. R&R Door bell/chime	1.00 EA		7.62	187.59	3.90	39.82	238.93
22. R&R Security system - key pad - High grade in office near hall door	1.00 EA		10.36	279.28	12.18	60.38	362.20
-----Electrical Covers/Switches & Outlets							
23. R&R Outlet	28.00 EA		7.65	22.20	6.47	168.46	1,010.73
24. R&R Switch	28.00 EA		7.65	22.90	8.38	172.76	1,036.54
25. R&R Ground fault interrupter (GFI) outlet	8.00 EA		7.65	41.93	15.51	82.42	494.57
-----Exterior-----							
26. R&R Surveillance camera - color	3.00 EA		76.01	683.25	117.00	478.96	2,873.74
27. R&R Spot light fixture - double	3.00 EA		21.17	124.10	9.30	89.02	534.13
28. R&R Exterior light fixture - Premium grade wall sconce light fixtures	6.00 EA		19.05	208.50	64.35	285.94	1,715.59
29. R&R Exterior light fixture - High grade garden light fixtures.	12.00 EA		19.05	148.86	87.76	420.54	2,523.22
Totals: Electrical					642.55	4,731.98	28,391.81

Plumbing

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
30. Plumbing/gas line air pressure test	1.00 EA		0.00	214.36	0.00	42.88	257.24
31. Plumbing/drain line water pressure test	1.00 EA		0.00	509.10	0.00	101.82	610.92
Totals: Plumbing					0.00	144.70	868.16

Appliances

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Kitchen Appliances----- Both the model of Electric / gas range-oven combo and the model of dishwasher and no longer on the market, so xactimate line item pricing is being used for the time being. Price may be updated once suitable replacements are located and sourced							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Appliances

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
32. R&R Refrigerator - side by side - 25 to 30 cf - Premium grade	1.00 EA		57.01	3,256.52	312.00	725.10	4,350.63
33. R&R Dishwasher - Premium grade	1.00 EA		40.72	1,270.32	108.03	283.80	1,702.87
34. R&R Range - freestanding - dual - 36" - Premium grade	1.00 EA		30.60	8,938.19	853.13	1,964.38	11,786.30
35. R&R Range hood - stainless steel - High grade	1.00 EA		38.01	2,918.79	269.12	645.18	3,871.10
-----Laundry Room Appliances-----							
36. R&R Washer/Washing Machine - Front-loading - High grade	1.00 EA		40.72	1,429.86	126.75	319.48	1,916.81
37. R&R Dryer - Gas - High grade	1.00 EA		30.61	1,362.32	117.00	301.98	1,811.91
Totals: Appliances					1,786.03	4,239.92	25,439.62

Window and Patio Doors Replacement

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
This folder accounts for all exterior windows and patio door replacements. All other work related to the replacement is included in the room the work is to be preformed in.							
-----Kitchen/Dining Room-----							
38. R&R 5-0 8-0 vinyl sliding patio door - High grade	1.00 EA		68.28	2,055.75	156.27	456.08	2,736.38
39. R&R Vinyl window, horizontal sliding, 12-23 sf - High grade	3.00 EA		34.34	617.41	145.47	420.14	2,520.86
-----Bedroom 1-----							
40. R&R Vinyl window, horizontal sliding, 24-32 sf - Premium grade	1.00 EA		53.79	1,337.54	116.83	301.62	1,809.78
window has double slider openings in single window encloser, used premium grade to account for added cost							
-----Office-----							
41. R&R Vinyl window, horizontal sliding, 12-23 sf - Premium grade	1.00 EA		34.34	919.56	77.95	206.38	1,238.23
window has double slider openings in single window encloser, used premium grade to account for added cost							
-----Laundry Room-----							
42. R&R Vinyl window, horizontal sliding, 3-11 sf - High grade	1.00 EA		34.34	509.98	39.55	116.78	700.65
-----Garage-----							
43. R&R Vinyl window, horizontal sliding, 12-23 sf - High grade	1.00 EA		34.34	617.41	48.49	140.04	840.28
-----Bathroom 1-----							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Window and Patio Doors Replacement

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
44. R&R Vinyl window, horizontal sliding, 3-11 sf - High grade -----Master Bathroom -----	1.00 EA		34.34	509.98	39.55	116.78	700.65
45. R&R Vinyl window, horizontal sliding, 3-11 sf - High grade -----Master Bedroom-----	1.00 EA		34.34	509.98	39.55	116.78	700.65
46. R&R 5-0 8-0 vinyl sliding patio door - High grade -----Living Room-----	2.00 EA		68.28	2,055.75	312.53	912.12	5,472.71
47. R&R 5-0 8-0 vinyl sliding patio door - High grade	4.00 EA		68.28	2,055.75	625.06	1,824.24	10,945.42
48. R&R Vinyl window, horizontal sliding, 24-32 sf - Premium grade window has double slider openings in single window encloser, used premium grade to account for added cost	2.00 EA		53.79	1,337.54	233.66	603.28	3,619.60
49. Window Reglazing & Repair (Bid Item) - per C-FIX - Invoice #577	1.00 EA		0.00	2,049.00	0.00	409.80	2,458.80

The line item applies to the widow repairs per C-FIX.

Scope of work:
Fire Remediation & Restoration – Windows and Sliding Glass Doors (Labor Only) Fire remediation and restoration of ten (10) large windows and nine (9) sliding glass doors at 935 Chattanooga Ave, Pacific Palisades, CA 90272, affected by smoke and soot exposure. Process includes HEPA vacuum removal of soot and ash from frames, tracks and assemblies, wet neutralization to eliminate smoke film and odor, inspection and adjustment of roller assemblies for proper alignment and closure, silicone lubrication, and final operational verification. Work performed under insurance restoration protocols and post-fire remediation standards.

Materials and any component replacements are excluded and will be quoted separately via change order if required upon inspection.

Labor only.
Materials & replacements, if required, will be issued as a separate change order with photos. 90-day workmanship warranty.


Totals: Window and Patio Doors Replacement					1,834.91	5,624.04	33,744.01
--	--	--	--	--	----------	----------	-----------

Dwelling
Main Level



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
 California Public Adjuster License #2L70602
 Colorado Public Adjuster License #608394
 Nevada Public Adjuster License # 3443075
 Texas Public Adjuster License #2207166



Missing Wall

Missing Wall - Goes to Floor

Entry

Height: 7' 5"


177.31 SF Walls	45.76 SF Ceiling
223.07 SF Walls & Ceiling	45.76 SF Floor
5.08 SY Flooring	23.24 LF Floor Perimeter
28.32 LF Ceil. Perimeter	

3' 9" X 7' 5"

Opens into LIVING_ROOM

5' 1" X 7'

Opens into KITCHEN1



Subroom: Entry Coat Closet (1)

Height: 7' 5"

79.65 SF Walls	7.17 SF Ceiling
86.82 SF Walls & Ceiling	7.17 SF Floor
0.80 SY Flooring	10.74 LF Floor Perimeter
10.74 LF Ceil. Perimeter	

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Ceiling-----							
50. Batt insulation - 12" - R38 - paper / foil faced	52.93 SF		0.00	2.64	8.93	29.72	178.39
51. 5/8" drywall - hung, taped, ready for texture	52.93 SF		0.00	3.98	4.03	42.94	257.63
52. Texture drywall - light hand texture	52.93 SF		0.00	1.82	0.46	19.36	116.15
53. Painting - Faux (special effects) - 2 part	52.93 SF		0.00	3.94	1.29	41.96	251.79
54. Seal the ceiling w/latex based stain blocker - one coat	52.93 SF		0.00	1.00	0.52	10.68	64.13
55. Mask and prep for paint - tape only (per LF)	78.12 LF		0.00	1.02	0.38	16.02	96.08
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
-----Walls-----							
56. 5/8" drywall - hung, taped, ready for texture	256.96 SF		0.00	3.98	19.54	208.44	1,250.68
57. Texture drywall - light hand texture	256.96 SF		0.00	1.82	2.26	94.00	563.93
58. Mask and prep for paint - plastic, paper, tape (per LF)	78.12 LF		0.00	2.20	2.06	34.80	208.72
Mask off ceiling and flooring to paint walls							
59. Seal the walls w/latex based stain blocker - one coat	256.96 SF		0.00	1.00	2.51	51.90	311.37



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Entry

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
60. Painting - Faux (special effects) - 2 part	256.96 SF		0.00	3.94	6.26	203.74	1,222.42
61. Baseboard - 4 1/4"	33.98 LF		0.00	5.73	9.31	40.80	244.82
62. Paint baseboard - distressed/faux paint	33.98 LF		0.00	7.22	0.60	49.18	295.12
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
63. Chair rail - 2 1/2"	13.67 LF		0.00	4.26	2.47	12.14	72.84
64. Paint chair rail - distressed/faux paint	13.67 LF		0.00	4.83	0.17	13.24	79.44
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
-----Floor-----							
65. Stone floor covering - High grade	52.93 SF		0.00	32.97	52.74	359.56	2,157.40
66. Additional labor to remove stone from concrete slab	52.93 SF		3.06	0.00	0.00	32.40	194.37
67. Floor leveling cement - Heavy	52.93 SF		0.00	5.17	9.75	56.70	340.10
68. Add-on for diagonal tile installation	104.60 SF		0.00	2.84	0.00	59.42	356.48
69. Tile/stone sealer	52.93 SF		0.00	1.53	1.91	16.58	99.47
70. Floor protection - heavy paper and tape	52.93 SF		0.45	0.00	0.36	4.84	29.02
Floor paper to protect floor after new flooring installation							
-----Fixtures-----							
71. Light fixture	1.00 EA		0.00	87.21	3.22	18.08	108.51
-----Door/Windows-----							
72. Door lockset & deadbolt - exterior - High grade	1.00 EA		0.00	148.23	10.53	31.74	190.50
73. Prime & paint door slab only - exterior (per side)	1.00 EA		0.00	71.37	1.72	14.62	87.71
74. Detach & Reset Exterior door - metal - insulated / wood - High grade	1.00 EA	201.99	0.00	0.00	0.71	40.54	243.24
75. Interior door unit	1.00 EA		0.00	343.85	25.36	73.86	443.07
76. Paint door or window opening - Large - 2 coats (per side)	1.00 EA		0.00	60.96	0.73	12.34	74.03
77. Paint door slab only - 2 coats (per side)	2.00 EA		0.00	61.04	2.06	24.84	148.98
78. Paint door/window trim & jamb - 2 coats (per side)	4.00 EA		0.00	51.82	2.47	41.96	251.71




Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Entry

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
79. Security system - contact w/wire (per opening)	1.00 EA		0.00	116.14	1.22	23.46	140.82
-----Closet-----							
80. Seal & paint closet shelving - single shelf	1.00 EA		0.00	86.88	0.57	17.50	104.95
81. Detach & Reset Closet shelf and rod package	2.83 LF	15.31	0.00	0.00	0.00	8.66	51.99
Totals: Entry					174.14	1,706.02	10,235.86




5' 1" X 7'

Opens into ENTRY

Kitchen

Height: Sloped

179.51 SF Walls	90.64 SF Ceiling
270.15 SF Walls & Ceiling	89.07 SF Floor
9.90 SY Flooring	17.17 LF Floor Perimeter
38.15 LF Ceil. Perimeter	






Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Kitchen



Subroom: Stove inset (2)

Height: 7' 5"

86.59 SF Walls	16.04 SF Ceiling
102.64 SF Walls & Ceiling	16.04 SF Floor
1.78 SY Flooring	11.68 LF Floor Perimeter
18.93 LF Ceil. Perimeter	

Missing Wall - Goes to Floor

7' 3" X 7' 5"

Opens into KITCHEN1

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
---Ceiling---							
82. Paint paneling - distressed/faux paint	197.93 SF		0.00	4.02	3.28	159.80	958.76
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
83. Paint wood beam - distressed/faux paint	52.71 SF		0.00	12.90	3.13	136.62	819.71
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
84. Quarter round - 3/4" - stain grade	123.42 LF		0.00	2.70	17.57	70.16	420.96
detach to facilitate soda blasting of ceiling paneling, then replace and stain/paint							
85. Stain & finish base shoe or quarter round	123.42 LF		0.00	2.10	3.25	52.50	314.93
86. Mask and prep for paint - tape only (per LF)	477.94 LF		0.00	1.02	2.33	97.96	587.79
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
---Walls---							
87. 5/8" drywall - hung, taped, ready for texture	740.55 SF		0.00	3.98	56.32	600.74	3,604.45
88. Texture drywall - light hand texture	740.55 SF		0.00	1.82	6.50	270.86	1,625.16
89. Drywall window return - up to 6"	56.92 LF		0.00	15.99	7.22	183.48	1,100.85
90. Seal/prime (1 coat) then paint (2 coats) the walls	740.55 SF		0.00	2.10	26.72	316.38	1,898.26
91. Baseboard - 4 1/4"	82.58 LF		0.00	5.73	22.62	99.16	594.96
92. Seal (1 coat) & paint (2 coats) baseboard	82.58 LF		0.00	3.60	1.77	59.82	358.88
93. Mask and prep for paint - plastic, paper, tape (per LF)	238.97 LF		0.00	2.20	6.29	106.40	638.42
Mask off ceiling and flooring to paint walls							
-----Floor-----							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Kitchen

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
94. Snaplock Laminate - simulated wood flooring	232.02 SF		0.00	7.92	78.27	383.18	2,299.05
95. Vapor barrier - visqueen - 6mil	232.02 SF		0.00	0.48	1.58	22.60	135.55
96. T- molding - for wood flooring - High grade	5.17 LF		0.00	9.89	4.38	11.10	66.61
97. Floor protection - heavy paper and tape	232.02 SF		0.00	0.71	1.58	33.26	199.57
-----Door/Windows-----							
** Windows and door replacements are in the front load windows and doors folder**							
98. Window trim set (casing & stop)	56.92 LF		0.00	7.36	17.81	87.34	524.08
99. Paint door/window trim & jamb - 2 coats (per side)	1.00 EA		0.00	51.56	0.60	10.44	62.60
100. Paint door/window trim & jamb - Large - 2 coats (per side)	2.00 EA		0.00	60.61	1.40	24.52	147.14
101. Window blind - fabric/woven - 20.1 to 32 SF - High grade	1.00 EA		0.00	351.77	25.93	75.54	453.24
102. Window blind - fabric woven - 7.1 to 14 SF - High grade	1.00 EA		0.00	213.95	14.67	45.74	274.36
103. Window blind - fabric/woven - 64" x 80" vertical blinds	1.00 EA		0.00	675.00	28.78	140.76	844.54
104. Security system - contact w/wire (per opening)	1.00 EA		0.00	116.14	1.22	23.46	140.82
-----Plumbing-----							
105. Sink faucet - Kitchen - High grade	2.00 EA		0.00	418.91	62.69	180.10	1,080.61
-----Fixtures-----							
106. Hanging light fixture - Premium grade	1.00 EA		0.00	177.11	10.07	37.44	224.62
107. Recessed light fixture - High grade	4.00 EA		0.00	188.70	23.08	155.58	933.46
108. Light fixture - High grade	1.00 EA		0.00	124.85	4.97	25.98	155.80
109. Door bell/chime	1.00 EA		0.00	187.61	3.90	38.30	229.81
110. Paint door slab only - 2 coats (per side)	2.00 EA		0.00	61.04	2.06	24.84	148.98
111. Seal & paint closet shelving - single shelf	5.00 EA		0.00	86.88	2.83	87.44	524.67
112. Smoke detector - High grade	1.00 EA		0.00	121.12	7.05	25.64	153.81
Totals: Kitchen					449.87	3,587.14	21,522.45



Living Room

Height: Peaked

411.27 SF Ceiling
404.14 SF Floor
80.14 LF Floor Perimeter



3' 9" X 7' 8"

Opens into ENTRY

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Ceiling----							
113. Mask and prep for paint - tape only (per LF)	338.04 LF		0.00	1.02	1.65	69.30	415.75
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
114. Prime & paint cold air return (cover)	2.00 EA		0.00	27.67	1.27	11.32	67.93
115. Paint paneling - distressed/faux paint	411.27 SF		0.00	4.02	6.82	332.02	1,992.15
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
116. Paint wood beam - distressed/faux paint	117.92 SF		0.00	12.90	7.01	305.64	1,833.82
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
117. Quarter round - 3/4" - stain grade	188.97 LF		0.00	2.70	26.90	107.42	644.54
detach to facilitate soda blasting of ceiling paneling, then replace and stain/paint							
118. Seal & paint base shoe or quarter round	188.97 LF		0.00	1.35	2.76	51.58	309.45
----Walls----							
119. Mask and prep for paint - plastic, paper, tape (per LF)	169.02 LF		0.00	2.20	4.45	75.26	451.55
Mask off ceiling and flooring to paint walls							
120. 5/8" drywall - hung, taped, ready for texture	730.95 SF		0.00	3.98	55.59	592.96	3,557.73
121. Texture drywall - light hand texture	730.95 SF		0.00	1.82	6.41	267.34	1,604.08
122. Drywall window return - up to 6"	93.00 LF		0.00	15.99	11.79	299.78	1,798.64
123. Seal the walls w/latex based stain blocker - one coat	730.95 SF		0.00	1.00	7.13	147.62	885.70
124. Painting - Faux (special effects) - 2 part	730.95 SF		0.00	3.94	17.82	579.54	3,477.30
125. Baseboard - 4 1/4"	80.14 LF		0.00	5.73	21.96	96.24	577.40



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Living Room

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
126. Paint baseboard - distressed/faux paint	80.14 LF		0.00	7.22	1.41	116.00	696.02
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
-----Floor-----							
127. Stone floor covering - High grade	404.14 SF		0.00	32.97	402.71	2,745.44	16,472.65
128. Additional labor to remove stone from concrete slab	404.14 SF		3.06	0.00	0.00	247.34	1,484.01
129. Floor leveling cement - Heavy	404.14 SF		0.00	5.17	74.47	432.78	2,596.65
130. Tile/stone sealer	808.27 SF		0.00	1.53	29.16	253.18	1,518.99
131. RegROUT stone floor	404.14 SF		0.00	6.45	3.94	522.12	3,132.76
132. Floor protection - heavy paper and tape	404.14 SF		0.45	0.00	2.76	36.94	221.56
Floor paper to protect floor after new flooring installation							
-----Fixtures-----							
133. TV Brackets - Wall or ceiling mounted - Detach & reset	1.00 EA		0.00	68.61	0.00	13.72	82.33
134. Hanging light fixture - Premium grade	1.00 EA		0.00	177.11	10.07	37.44	224.62
135. Security system - contact w/wire (per opening)	6.00 EA		0.00	116.14	7.31	140.82	844.97
-----Door/Windows-----							
136. Paint door/window trim & jamb - distressed/faux paint	6.00 EA		0.00	181.86	4.21	219.08	1,314.45
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
137. Window blind - fabric/woven - 20. 1 to 32 SF - High grade	2.00 EA		0.00	351.77	51.85	151.08	906.47
138. Window drapery - hardware	9.00 EA		0.00	121.99	51.33	229.84	1,379.08
----- Faux Painted Bookcase-----							
139. Stain & finish bookcase - 3 part faux/ distressed look	45.00 SF		0.00	19.76	3.16	178.48	1,070.84
this line item has been modified to account for the labor involved in creating the 3 part faux paint finished with distressed marks on this item. labor and materials have been assumed at 4x what a standard single coat of paint would be.							
140. Stain & finish crown molding - 3 part faux/ distressed look	12.25 LF		0.00	9.56	0.32	23.48	140.91
this line item has been modified to account for the labor involved in creating the 3 part faux paint finished with distressed marks on this item. labor and materials have been assumed at 4x what a standard single coat of paint would be.							
141. Paint full louvered door slab only - 3 part faux/ distressed look	3.00 EA		0.00	338.20	3.11	203.54	1,221.25




Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166


CONTINUED - Living Room

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
this line item has been modified to account for the labor involved in creating the 3 part faux paint finished with distressed marks on this item. labor and materials have been assumed at 4x what a standard single coat of paint would be.							
142. Stain & finish paneling - 3 part faux/ distressed look	15.00 SF		0.00	10.56	0.66	31.82	190.88
this line item has been modified to account for the labor involved in creating the 3 part faux paint finished with distressed marks on this item. labor and materials have been assumed at 4x what a standard single coat of paint would be.							
Totals: Living Room					818.03	8,519.12	51,114.48



Fireplace	Height: 8'
227.30 SF Walls	37.04 SF Ceiling
264.35 SF Walls & Ceiling	37.04 SF Floor
4.12 SY Flooring	28.41 LF Floor Perimeter
28.41 LF Ceil. Perimeter	

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Fireplace----							
143. Soda blasting - Extra heavy	102.01 SF		0.00	4.52	13.73	94.96	569.78
144. Tile/stone sealer	102.01 SF		0.00	1.53	3.68	31.96	191.72
Totals: Fireplace					17.41	126.92	761.50



Office	Height: Sloped
422.45 SF Walls	141.86 SF Ceiling
564.31 SF Walls & Ceiling	138.87 SF Floor
15.43 SY Flooring	48.17 LF Floor Perimeter
48.73 LF Ceil. Perimeter	

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Ceiling----							
145. Paint paneling - distressed/faux paint	141.86 SF		0.00	4.02	2.35	114.54	687.17
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166


CONTINUED - Office

Table with 8 columns: DESCRIPTION, QTY, RESET, REMOVE, REPLACE, TAX, O&P, TOTAL. Rows include items 146-156 (Walls), 157-160 (Doors/Windows), and a Totals row for Office.



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166



Office Closet		Height: 7' 5"
158.31 SF Walls	17.34 SF Ceiling	
175.65 SF Walls & Ceiling	17.34 SF Floor	
1.93 SY Flooring	21.34 LF Floor Perimeter	
21.34 LF Ceil. Perimeter		

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Ceiling----							
161. Paint paneling - distressed/faux paint	17.34 SF		0.00	4.02	0.29	14.00	84.00
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
162. Paint wood beam - distressed/faux paint	24.38 SF		0.00	12.90	1.45	63.20	379.15
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
163. Batt insulation - 12" - R38 - paper / foil faced	17.34 SF		0.00	2.64	2.93	9.74	58.45
164. Mask and prep for paint - tape only (per LF)	85.38 LF		0.00	1.02	0.42	17.50	105.01
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
165. Seal/prime (1 coat) then paint (2 coats) the ceiling	17.34 SF		0.00	2.10	0.63	7.40	44.44
----Walls----							
166. 5/8" drywall - hung, taped, ready for texture	158.31 SF		0.00	3.98	12.04	128.42	770.53
167. Texture drywall - light hand texture	158.31 SF		0.00	1.82	1.39	57.90	347.41
168. Seal/prime (1 coat) then paint (2 coats) the walls	158.31 SF		0.00	2.10	5.71	67.64	405.80
169. Baseboard - 4 1/4"	21.34 LF		0.00	5.73	5.85	25.64	153.77
170. Seal (1 coat) & paint (2 coats) baseboard	21.34 LF		0.00	3.60	0.46	15.46	92.74
171. Mask and prep for paint - plastic, paper, tape (per LF)	42.69 LF		0.00	2.20	1.12	19.00	114.04
Mask off ceiling and flooring to paint walls							
-----Floor-----							
Flooring line items Per Tri Tech Bid							
----Fixtures----							
172. Closet shelf and rod package in hallway coat closet	6.17 LF		0.00	29.33	3.51	36.90	221.38




Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Office Closet

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
173. Seal & paint closet shelving - single shelf - Large closet	1.00 EA		0.00	113.18	0.84	22.80	136.82
174. Seal & paint cabinetry - upper - inside and out	8.67 LF		0.00	65.29	5.20	114.26	685.52
175. Cabinet knob or pull	4.00 EA		0.00	10.73	1.38	8.86	53.16
-----Doors-----							
176. Paint bypass door set - slab only - 2 coats (per side)	2.00 EA		0.00	76.84	4.01	31.54	189.23
177. Bypass (sliding) door set - birch	1.00 EA		0.00	392.06	29.04	84.22	505.32
178. Lube/recondition sliding bypass door	2.00 EA		0.00	213.80	0.52	85.62	513.74
Totals: Office Closet					76.79	810.10	4,860.51



Bedroom 1

Height: Sloped

363.30 SF Walls	98.35 SF Ceiling
461.65 SF Walls & Ceiling	96.21 SF Floor
10.69 SY Flooring	40.09 LF Floor Perimeter
40.55 LF Ceil. Perimeter	

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Ceiling----							
179. Paint paneling - distressed/faux paint	98.35 SF		0.00	4.02	1.63	79.40	476.40
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
180. Paint wood beam - distressed/faux paint	24.38 SF		0.00	12.90	1.45	63.20	379.15
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
181. Quarter round - 3/4" - stain grade	45.55 LF		0.00	2.70	6.48	25.90	155.37
detach to facilitate soda blasting of ceiling paneling, then replace and stain/paint							
182. Seal (1 coat) & paint (1 coat) trim	45.55 LF		0.00	2.40	0.71	22.00	132.03
183. Mask and prep for paint - tape only (per LF)	81.10 LF		0.00	1.02	0.40	16.62	99.74
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
----Walls----							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Bedroom 1

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
184. 5/8" drywall - hung, taped, ready for texture	363.30 SF		0.00	3.98	27.63	294.70	1,768.26
185. Texture drywall - light hand texture	363.30 SF		0.00	1.82	3.19	132.88	797.28
186. Mask and prep for paint - plastic, paper, tape (per LF) Mask off ceiling and flooring to paint walls	81.10 LF		0.00	2.20	2.14	36.10	216.66
187. Seal the walls w/latex based stain blocker - one coat	363.30 SF		0.00	1.00	3.54	73.36	440.20
188. Painting - Faux (special effects) - 2 part	363.30 SF		0.00	3.94	8.86	288.06	1,728.32
189. Baseboard - 4 1/4"	40.09 LF		0.00	5.73	10.98	48.14	288.84
190. Paint baseboard - distressed/faux paint this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.	40.09 LF		0.00	7.22	0.70	58.04	348.19
191. Prime & paint cold air return (cover)	1.00 EA		0.00	27.67	0.64	5.66	33.97
-----Floor-----							
192. Stone floor covering - High grade	96.21 SF		0.00	32.97	95.87	653.58	3,921.49
193. Additional labor to remove stone from concrete slab	96.21 SF		3.06	0.00	0.00	58.88	353.28
194. Floor leveling cement - Heavy	96.21 SF		0.00	5.17	17.73	103.02	618.16
195. Tile/stone sealer	192.43 SF		0.00	1.53	6.94	60.26	361.62
196. Floor protection - heavy paper and tape Floor paper to protect floor after new flooring installation	96.21 SF		0.45	0.00	0.66	8.80	52.75
-----Door/Windows-----							
197. Paint door/window trim & jamb - distressed/faux paint this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.	2.00 EA		0.00	181.86	1.40	73.02	438.14
198. Window blind - double cell - 14.1 to 20 SF - High grade	1.00 EA		0.00	264.42	19.25	56.74	340.41
199. Window blind - double cell - 7.1 to 14 SF - High grade	2.00 EA		0.00	210.00	28.57	89.72	538.29
-----Fixtures-----							
200. Fixture (can) for track lighting - High grade	3.00 EA		0.00	54.08	10.61	34.56	207.41
201. Track lighting - track only	8.00 LF		0.00	29.99	4.19	48.82	292.93




Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Bedroom 1

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
Totals: Bedroom 1					253.57	2,331.46	13,988.89



Bed1 Closet

Height: 7' 5"

117.43 SF Walls	11.50 SF Ceiling
128.93 SF Walls & Ceiling	11.50 SF Floor
1.28 SY Flooring	15.83 LF Floor Perimeter
15.83 LF Ceil. Perimeter	

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Ceiling----							
202. Batt insulation - 12" - R38 - paper / foil faced	11.50 SF		0.00	2.64	1.94	6.46	38.76
203. 5/8" drywall - hung, taped, ready for texture	11.50 SF		0.00	3.98	0.87	9.34	55.98
204. Texture drywall - light hand texture	11.50 SF		0.00	1.82	0.10	4.20	25.23
205. Mask and prep for paint - tape only (per LF)	63.33 LF		0.00	1.02	0.31	12.98	77.89
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
206. Seal/prime (1 coat) then paint (2 coats) the ceiling	11.50 SF		0.00	2.10	0.42	4.92	29.49
----Walls----							
207. 5/8" drywall - hung, taped, ready for texture	117.43 SF		0.00	3.98	8.93	95.26	571.56
208. Texture drywall - light hand texture	117.43 SF		0.00	1.82	1.03	42.94	257.69
209. Seal/prime (1 coat) then paint (2 coats) the walls	117.43 SF		0.00	2.10	4.24	50.16	301.00
210. Baseboard - 4 1/4"	15.83 LF		0.00	5.73	4.34	19.00	114.05
211. Seal (1 coat) & paint (2 coats) baseboard	15.83 LF		0.00	3.60	0.34	11.46	68.79
212. Mask and prep for paint - plastic, paper, tape (per LF)	31.67 LF		0.00	2.20	0.83	14.10	84.60
Mask off ceiling and flooring to paint walls							
-----Floor-----							
213. Stone floor covering - High grade	11.50 SF		0.00	32.97	11.46	78.14	468.76




Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Bed1 Closet

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
214. Additional labor to remove stone from concrete slab	11.50 SF		3.06	0.00	0.00	7.04	42.23
215. Floor leveling cement - Heavy	11.50 SF		0.00	5.17	2.12	12.32	73.90
216. Tile/stone sealer	23.00 SF		0.00	1.53	0.83	7.20	43.22
217. Floor protection - heavy paper and tape	11.50 SF		0.45	0.00	0.08	1.06	6.32
Floor paper to protect floor after new flooring installation							
-----Fixtures-----							
218. Closet shelf and rod package	6.17 LF		0.00	29.33	3.51	36.90	221.38
in hallway coat closet							
219. Seal & paint closet shelving - single shelf - Large closet	1.00 EA		0.00	113.18	0.84	22.80	136.82
-----Doors-----							
220. Bypass mirrored door set	1.00 EA		0.00	345.10	23.98	73.82	442.90
221. Clean mirror	38.50 SF		0.00	1.15	0.04	8.86	53.18
222. Lube/recondition sliding door	1.00 EA		0.00	213.80	0.26	42.82	256.88
Totals: Bed1 Closet					66.47	561.78	3,370.63



Hall Bathroom 1

Height: 7' 5"

264.32 SF Walls	64.68 SF Ceiling
329.00 SF Walls & Ceiling	64.68 SF Floor
7.19 SY Flooring	40.64 LF Floor Perimeter
32.24 LF Ceil. Perimeter	

Missing Wall - Goes to Ceiling
Missing Wall - Goes to Ceiling

3' 1 7/16" X 4' 5"
1' 1" X 4' 5"

Opens into HALL_BATHROO
Opens into HALL_BATHROO

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Ceiling-----							
223. Batt insulation - 12" - R38 - paper / foil faced	64.68 SF		0.00	2.64	10.91	36.34	218.01
224. 5/8" drywall - hung, taped, ready for texture	64.68 SF		0.00	3.98	4.92	52.46	314.81
225. Texture drywall - light hand texture	64.68 SF		0.00	1.82	0.57	23.66	141.95



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Hall Bathroom 1

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
226. Seal/prime (1 coat) then paint (2 coats) the ceiling	64.68 SF		0.00	2.10	2.33	27.62	165.78
227. Mask and prep for paint - tape only (per LF)	128.95 LF		0.00	1.02	0.63	26.42	158.58
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
228. Paint crown molding - distressed/faux paint	32.24 LF		0.00	7.56	0.63	48.86	293.22
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
229. Prime & paint cold air return (cover)	1.00 EA		0.00	27.67	0.64	5.66	33.97
----Walls----							
230. 5/8" drywall - hung, taped, ready for texture	264.32 SF		0.00	3.98	20.10	214.42	1,286.51
231. Texture drywall - light hand texture	264.32 SF		0.00	1.82	2.32	96.68	580.06
232. Mask and prep for paint - plastic, paper, tape (per LF)	64.48 LF		0.00	2.20	1.70	28.72	172.28
Mask off ceiling and flooring to paint walls							
233. Drywall window return - up to 6"	12.00 LF		0.00	15.99	1.52	38.68	232.08
234. Seal the surface area w/latex based stain blocker - one coat	100.63 SF		0.00	1.00	0.98	20.32	121.93
235. Painting - Faux (special effects) - 2 part	100.63 SF		0.00	3.94	2.45	79.80	478.73
236. Baseboard - 4 1/4"	40.64 LF		0.00	5.73	11.13	48.80	292.80
237. Paint baseboard - distressed/faux paint	40.64 LF		0.00	7.22	0.71	58.82	352.95
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
-----Floor-----							
238. Stone floor covering - High grade	64.68 SF		0.00	32.97	64.45	439.40	2,636.35
239. Additional labor to remove stone from concrete slab	64.68 SF		3.06	0.00	0.00	39.58	237.50
240. Floor leveling cement - Heavy	64.68 SF		0.00	5.17	11.92	69.26	415.58
241. Tile/stone sealer	129.37 SF		0.00	1.53	4.67	40.52	243.13
242. T- molding - for wood flooring - High grade	2.33 LF		0.00	9.89	1.97	5.00	30.01
243. Floor protection - heavy paper and tape	64.68 SF		0.45	0.00	0.44	5.90	35.45
Floor paper to protect floor after new flooring installation							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166


CONTINUED - Hall Bathroom 1

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Door/Windows-----							
244. Custom shower door & partition - 1/4" glass w/frame	30.96 SF		0.00	37.00	63.81	241.86	1,451.19
245. Paint door/window trim & jamb - distressed/faux paint	2.00 EA		0.00	181.86	1.40	73.02	438.14
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
-----Fixtures-----							
246. Towel bar	2.00 EA		0.00	35.21	2.94	14.66	88.02
247. Medicine cabinet - High grade	1.00 EA		0.00	285.20	23.24	61.68	370.12
248. Light bar - 3 lights	1.00 EA		0.00	101.54	2.70	20.84	125.08
249. Heat lamp fixture - adjustable w/shield	1.00 EA		0.00	73.21	1.36	14.92	89.49
250. Toilet paper holder	1.00 EA		0.00	32.48	1.21	6.74	40.43
251. Security system - contact w/wire (per opening)	1.00 EA		0.00	116.14	1.22	23.46	140.82
-----Tile-----							
252. Regrout tile	116.83 SF		0.00	7.35	3.30	172.40	1,034.40
this includes the shower and all wall tilling							
253. Seal grout on tile wall	116.83 SF		0.00	2.67	2.16	62.82	376.92
254. Vanity	5.75 LF		0.00	279.20	124.85	346.06	2,076.31
255. Vanity top - one sink - cultured marble	5.75 LF		0.00	136.15	34.59	163.50	980.95
-----Plumbing-----							
256. Sink faucet - Bathroom	1.00 EA		0.00	244.92	14.38	51.86	311.16
257. Sink drain assembly with stop	1.00 EA		0.00	55.95	1.66	11.54	69.15
258. Refinish bathtub	1.00 EA		0.00	908.85	6.02	182.98	1,097.85
259. Toilet - Detach & reset	1.00 EA		0.00	305.16	0.89	61.22	367.27
260. Shower faucet	1.00 EA		0.00	259.86	12.68	54.52	327.06
261. Tub/shower faucet	1.00 EA		0.00	351.58	14.29	73.18	439.05
Totals: Hall Bathroom 1					457.69	3,044.18	18,265.09



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166



Master bathroom

Height: 7' 5"

232.39 SF Walls	57.69 SF Ceiling
290.08 SF Walls & Ceiling	57.69 SF Floor
6.41 SY Flooring	31.33 LF Floor Perimeter
31.33 LF Ceil. Perimeter	

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Ceiling----							
262. Batt insulation - 12" - R38 - paper / foil faced	57.69 SF		0.00	2.64	9.73	32.40	194.43
263. 5/8" drywall - hung, taped, ready for texture	57.69 SF		0.00	3.98	4.39	46.80	280.80
264. Texture drywall - light hand texture	57.69 SF		0.00	1.82	0.51	21.10	126.61
265. Seal/prime (1 coat) then paint (2 coats) the ceiling	57.69 SF		0.00	2.10	2.08	24.66	147.89
266. Seal (1 coat) & paint (2 coats) crown molding	31.33 LF		0.00	3.80	0.73	23.96	143.74
267. Prime & paint cold air return (cover)	1.00 EA		0.00	27.67	0.64	5.66	33.97
----Walls----							
268. Seal/prime (1 coat) then paint (2 coats) the walls	232.39 SF		0.00	2.10	8.38	99.28	595.68
269. Baseboard - 4 1/4"	31.33 LF		0.00	5.73	8.58	37.62	225.72
270. Seal (1 coat) & paint (2 coats) baseboard	31.33 LF		0.00	3.60	0.67	22.70	136.16
271. Mask and prep for paint - plastic, paper, tape (per LF)	62.67 LF		0.00	2.20	1.65	27.92	167.44
Mask off ceiling and flooring to paint walls							
-----Floor-----							
Flooring cleaning line items Per Tri Tech Bid							
272. Regrout tile floor	57.69 SF		0.00	7.23	2.81	83.98	503.89
273. Grout sealer	57.69 SF		0.00	2.46	1.07	28.60	171.59
-----Door/Windows-----							
274. Paint door/window trim & jamb - 2 coats (per side)	2.00 EA		0.00	51.82	1.24	20.96	125.84
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
-----Fixtures-----							
275. Robe hook	2.00 EA		0.00	20.97	1.74	8.72	52.40




Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Master bathroom

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
276. Mirror - framed	7.05 SF		0.00	31.65	16.57	47.94	287.64
277. Light bar - 4 lights	1.00 EA		0.00	111.35	3.66	23.02	138.03
278. Recessed light fixture - High grade	1.00 EA		0.00	188.70	5.77	38.90	233.37
279. Bathroom ventilation fan	1.00 EA		0.00	133.42	6.76	28.04	168.22
280. Toilet paper holder	1.00 EA		0.00	32.48	1.21	6.74	40.43
281. Detach & Reset Toilet	1.00 EA	305.16	0.00	0.00	0.89	61.22	367.27
282. Security system - contact w/wire (per opening)	1.00 EA		0.00	116.14	1.22	23.46	140.82
-----Cabinets-----							
283. Cabinetry - upper (wall) units	6.00 LF		0.00	194.09	80.48	249.00	1,494.02
284. Vanity	6.00 LF		0.00	279.20	130.27	361.10	2,166.57
285. Countertop - Granite or Marble - Standard grade	12.00 SF		0.00	67.19	19.14	165.08	990.50
286. Backsplash - solid surface - Unattached	14.00 SF		0.00	16.58	14.56	49.34	296.02
287. Sink - single - Premium grade	1.00 EA		0.00	825.52	67.25	178.56	1,071.33
288. Cabinet knob or pull	14.00 EA		0.00	10.73	4.83	31.00	186.05
-----Shower-----							
289. Custom shower door & partition - 1/2" glass - frameless	45.92 SF		0.00	103.00	252.56	996.48	5,978.80
290. Regrout tile	83.05 SF		0.00	7.35	2.35	122.56	735.33
291. Seal grout on tile wall	83.05 SF		0.00	2.67	1.54	44.64	267.92
Totals: Master bathroom					653.28	2,911.44	17,468.48



Master Bedroom	Height: Peaked
336.31 SF Walls	173.08 SF Ceiling
509.40 SF Walls & Ceiling	173.35 SF Floor
19.26 SY Flooring	39.42 LF Floor Perimeter
52.97 LF Ceil. Perimeter	



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Master Bedroom




Table with 2 columns: Subroom: Master entry (1) and Height: 7' 5". Rows include: 221.88 SF Walls, 47.40 SF Ceiling, 269.28 SF Walls & Ceiling, 47.40 SF Floor, 5.27 SY Flooring, 29.92 LF Floor Perimeter, 29.92 LF Ceil. Perimeter.

Main construction table with columns: DESCRIPTION, QTY, RESET, REMOVE, REPLACE, TAX, O&P, TOTAL. Includes sections for Missing Wall, Ceiling, and Walls with detailed item descriptions and quantities.



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Master Bedroom

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
304. Texture drywall - light hand texture	558.19 SF		0.00	1.82	4.90	204.16	1,224.97
305. Mask and prep for paint - plastic, paper, tape (per LF) Mask off ceiling and flooring to paint walls	165.77 LF		0.00	2.20	4.36	73.82	442.87
306. Seal the walls w/latex based stain blocker - one coat	558.19 SF		0.00	1.00	5.44	112.72	676.35
307. Painting - Faux (special effects) - 2 part	558.19 SF		0.00	3.94	13.61	442.58	2,655.46
308. Baseboard - 4 1/4"	69.33 LF		0.00	5.73	18.99	83.26	499.51
309. Paint baseboard - distressed/faux paint this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.	69.33 LF		0.00	7.22	1.22	100.36	602.14
-----Floor-----							
310. Stone floor covering - High grade	220.75 SF		0.00	32.97	219.97	1,499.62	8,997.72
311. Additional labor to remove stone from concrete slab	220.75 SF		3.06	0.00	0.00	135.10	810.60
312. Floor leveling cement - Heavy	220.75 SF		0.00	5.17	40.68	236.40	1,418.36
313. Tile/stone sealer	441.50 SF		0.00	1.53	15.93	138.28	829.71
314. Regrout stone floor	220.75 SF		0.00	6.45	2.15	285.20	1,711.19
315. Floor protection - heavy paper and tape Floor paper to protect floor after new flooring installation	220.75 SF		0.45	0.00	1.51	20.16	121.01
-----Fixtures-----							
316. Recessed light fixture - High grade	1.00 EA		0.00	188.70	5.77	38.90	233.37
317. TV Brackets - Wall or ceiling mounted - Detach & reset	1.00 EA		0.00	68.61	0.00	13.72	82.33
318. Cabinetry - full height unit	8.58 LF		0.00	384.13	261.50	711.46	4,268.80
319. Stain & finish full height cabinetry - distressed/faux paint this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 2.5x what a standard single coat of paint would be.	8.58 LF		0.00	361.57	13.45	623.16	3,738.88
320. Cabinetry - lower (base) units	1.42 LF		0.00	287.89	32.03	88.16	528.99
321. Stain & finish cabinetry - lower - distressed/faux paint this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 2.5x what a standard single coat of paint would be.	1.42 LF		0.00	207.90	1.26	59.30	355.78
322. Cabinetry - upper (wall) units	10.17 LF		0.00	194.09	136.42	422.06	2,532.38




Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Master Bedroom

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
323. Stain & finish cabinetry - upper - distressed/faux paint	10.17 LF		0.00	233.25	8.38	476.12	2,856.65
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 2.5x what a standard single coat of paint would be.							
324. Security system - contact w/wire (per opening)	2.00 EA		0.00	116.14	2.44	46.94	281.66
-----Door/Windows-----							
325. Paint door/window trim & jamb - distressed/faux paint	3.00 EA		0.00	181.86	2.11	109.54	657.23
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
326. Window blind - fabric/woven - 168" x 80" vertical blinds	1.00 EA		0.00	1,984.99	28.78	402.76	2,416.53
Totals: Master Bedroom					892.94	7,231.90	43,390.92

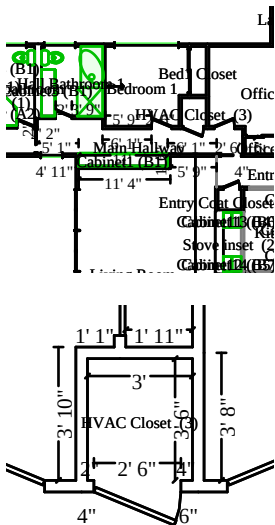

Main Hallway	Height: 7' 5"
462.22 SF Walls	104.64 SF Ceiling
566.86 SF Walls & Ceiling	104.64 SF Floor
11.63 SY Flooring	62.32 LF Floor Perimeter
62.32 LF Ceil. Perimeter	

Subroom: HVAC Closet (3)	Height: 7' 5"
96.69 SF Walls	10.56 SF Ceiling
107.26 SF Walls & Ceiling	10.56 SF Floor
1.17 SY Flooring	13.04 LF Floor Perimeter
13.04 LF Ceil. Perimeter	

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Ceiling----							
327. Batt insulation - 12" - R38 - paper / foil faced	115.20 SF		0.00	2.64	19.43	64.70	388.26
328. 5/8" drywall - hung, taped, ready for texture	115.20 SF		0.00	3.98	8.76	93.46	560.72
329. Texture drywall - light hand texture	115.20 SF		0.00	1.82	1.01	42.14	252.81



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Main Hallway

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
330. Painting - Faux (special effects) - 2 part	115.20 SF		0.00	3.94	2.81	91.34	548.04
331. Seal the ceiling w/latex based stain blocker - one coat	115.20 SF		0.00	1.00	1.12	23.26	139.58
332. Mask and prep for paint - tape only (per LF)	150.72 LF		0.00	1.02	0.74	30.88	185.35
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
333. Prime & paint cold air return (cover)	2.00 EA		0.00	27.67	1.27	11.32	67.93
----Walls----							
334. 5/8" drywall - hung, taped, ready for texture	558.91 SF		0.00	3.98	42.51	453.40	2,720.37
335. Texture drywall - light hand texture	558.91 SF		0.00	1.82	4.90	204.42	1,226.54
336. Mask and prep for paint - plastic, paper, tape (per LF)	150.72 LF		0.00	2.20	3.97	67.12	402.67
Mask off ceiling and flooring to paint walls							
337. Seal the walls w/latex based stain blocker - one coat	558.91 SF		0.00	1.00	5.45	112.88	677.24
338. Painting - Faux (special effects) - 2 part	558.91 SF		0.00	3.94	13.62	443.14	2,658.87
339. Baseboard - 4 1/4"	75.36 LF		0.00	5.73	20.65	90.50	542.96
340. Paint baseboard - distressed/faux paint	75.36 LF		0.00	7.22	1.32	109.08	654.50
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
-----Floor-----							
341. Stone floor covering - High grade	115.20 SF		0.00	32.97	114.79	782.58	4,695.51
342. Additional labor to remove stone from concrete slab	115.20 SF		3.06	0.00	0.00	70.50	423.01
343. Floor leveling cement - Heavy	115.20 SF		0.00	5.17	21.23	123.36	740.17
344. Add-on for diagonal tile installation	104.60 SF		0.00	2.84	0.00	59.42	356.48
345. Tile/stone sealer	115.20 SF		0.00	1.53	4.16	36.10	216.52
346. Regrout stone floor	115.20 SF		0.00	6.45	1.12	148.82	892.98
347. Floor protection - heavy paper and tape	115.20 SF		0.45	0.00	0.79	10.52	63.15
Floor paper to protect floor after new flooring installation							
-----Fixtures-----							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Main Hallway

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
348. Recessed light fixture - High grade	4.00 EA		0.00	186.19	22.11	153.38	920.25
349. Closet shelf and rod package in hallway coat closet	2.50 LF		0.00	29.33	1.42	14.94	89.69
350. Seal & paint closet shelving - single shelf	1.00 EA		0.00	86.88	0.57	17.50	104.95
351. Stain & finish full height cabinetry - distressed/faux paint this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 2.5x what a standard single coat of paint would be.	7.50 LF		0.00	361.57	11.76	544.72	3,268.26
352. Stain & finish cabinetry - lower - distressed/faux paint this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 2.5x what a standard single coat of paint would be.	3.42 LF		0.00	207.90	3.04	142.80	856.86
-----Door/Windows-----							
353. Interior door unit	6.00 EA		0.00	343.85	152.19	443.06	2,658.35
354. Bypass (sliding) door set - Colonist	2.00 EA		0.00	317.17	43.49	135.56	813.39
355. Door knob - interior - Premium grade replacement of this item is necessary due to smoke based corrosion and pitting on metal surface	4.00 EA		0.00	100.14	27.36	85.60	513.52
356. Paint door slab only - distressed/faux paint this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.	8.00 EA		0.00	183.12	8.22	294.64	1,767.82
357. Paint door/window trim & jamb - distressed/faux paint this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.	9.00 EA		0.00	181.86	6.32	328.60	1,971.66
-----HVAC Closet-----							
358. Light fixture	1.00 EA		0.00	87.21	3.22	18.08	108.51
359. Furnace - forced air - Detach & reset	0.50 EA		0.00	1,018.19	0.00	101.82	610.92
360. Gas/water line cap/plug - per cap	1.00 EA		0.00	18.17	0.12	3.66	21.95
361. Flexible gas supply line connector - 1/2" - up to 24"	1.00 EA		0.00	35.51	2.20	7.54	45.25
362. Fir subfloor - no finish replace decking the furnace is sat upon	10.50 SF		0.00	8.97	3.72	19.58	117.49
363. Security system - contact w/wire (per opening)	1.00 EA		0.00	116.14	1.22	23.46	140.82




Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Main Hallway

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
Totals: Main Hallway					556.61	5,403.88	32,423.35



Laundry Room	Height: Sloped
239.13 SF Walls	52.75 SF Ceiling
291.88 SF Walls & Ceiling	52.08 SF Floor
5.79 SY Flooring	30.12 LF Floor Perimeter
30.34 LF Ceil. Perimeter	

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Ceiling----							
364. Paint paneling - distressed/faux paint	52.75 SF		0.00	4.02	0.87	42.60	255.53
this line item has been modified to account for the labor involved in creating the faux paint finished with distressed marks on this item. labor and materials have been assumed at 3x what a standard single coat of paint would be.							
365. Quarter round - 3/4" - stain grade	30.50 LF		0.00	2.70	4.34	17.34	104.03
detach to facilitate soda blasting of ceiling paneling, then replace and stain/paint							
366. Seal & paint base shoe or quarter round	30.50 LF		0.00	1.35	0.45	8.34	49.97
367. Mask and prep for paint - tape only (per LF)	121.35 LF		0.00	1.02	0.59	24.88	149.25
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
----Walls----							
368. 5/8" drywall - hung, taped, ready for texture	239.13 SF		0.00	3.98	18.19	193.98	1,163.91
369. Texture drywall - light hand texture	239.13 SF		0.00	1.82	2.10	87.46	524.78
370. Seal/prime (1 coat) then paint (2 coats) the walls	239.13 SF		0.00	2.10	8.63	102.16	612.96
371. Drywall window return - up to 6"	7.50 LF		0.00	15.99	0.95	24.18	145.06
372. Baseboard - 4 1/4"	30.12 LF		0.00	5.73	8.25	36.18	217.02
373. Seal (1 coat) & paint (2 coats) baseboard	30.12 LF		0.00	3.60	0.65	21.82	130.90
374. Mask and prep for paint - plastic, paper, tape (per LF)	60.67 LF		0.00	2.20	1.60	27.02	162.09
Mask off ceiling and flooring to paint walls							
----Floors----							
375. Engineered wood flooring	52.08 SF		0.00	11.71	33.56	128.70	772.12



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster


Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Laundry Room

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
376. Add for glued down wood flooring application over concrete	52.08 SF		0.00	1.42	5.64	15.92	95.51
377. T- molding - for wood flooring - High grade	2.00 LF		0.00	9.89	1.69	4.30	25.77
378. Floor leveling cement - Heavy	52.08 SF		0.00	4.02	9.60	43.80	262.76
379. Floor protection - heavy paper and tape	52.08 SF		0.45	0.00	0.36	4.76	28.56
-----Door/Windows-----							
380. Paint door/window trim & jamb - Large - 2 coats (per side)	3.00 EA		0.00	60.61	2.11	36.78	220.72
381. Door lockset & deadbolt - exterior - High grade	1.00 EA		0.00	148.23	10.53	31.74	190.50
382. Paint door slab only - 2 coats (per side)	2.00 EA		0.00	61.04	2.06	24.84	148.98
-----Cabinets-----							
383. Cabinetry - upper (wall) units - High grade	10.33 LF		0.00	258.02	202.96	573.68	3,441.99
384. Cabinet knob or pull	12.00 EA		0.00	10.73	4.14	26.58	159.48
-----Fixtures-----							
385. Prime & paint pipe, 1" to 3" diameter	8.00 LF		0.00	1.12	0.13	1.82	10.91
386. Light fixture - wall sconce - High grade	1.00 EA		0.00	173.67	11.70	37.08	222.45
387. Washer/Washing machine - Detach	1.00 EA		0.00	40.10	0.00	8.02	48.12
388. Dryer - gas - Detach	1.00 EA		0.00	47.22	0.00	9.44	56.66
389. Gas/water line cap/plug - per cap	1.00 EA		0.00	18.17	0.12	3.66	21.95
390. Flexible gas supply line connector - 1/2" - up to 24"	1.00 EA		0.00	35.51	2.20	7.54	45.25
391. Ducting - flexible - 6" round	5.00 LF		0.00	2.10	1.02	2.30	13.82
392. Security system - contact w/wire (per opening)	1.00 EA		0.00	116.14	1.22	23.46	140.82
Totals: Laundry Room					335.66	1,570.38	9,421.87

Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166



Garage

Height: Sloped

747.93	SF Walls	401.36	SF Ceiling
1,149.29	SF Walls & Ceiling	397.32	SF Floor
44.15	SY Flooring	81.50	LF Floor Perimeter
81.91	LF Ceil. Perimeter		

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----Ceiling----							
393. Stain & finish wood beam	85.00 SF		0.00	4.30	5.06	74.12	444.68
394. Stain & finish paneling	401.36 SF		0.00	2.64	17.61	215.44	1,292.64
395. Mask and prep for paint - tape only (per LF)	327.66 LF		0.00	1.02	1.60	67.16	402.97
Masking off crown moulding to paint the walls top and bottom, once to paint walls, once to stain the crown moulding							
----Walls----							
396. 5/8" drywall - hung, taped, ready for texture	747.93 SF		0.00	3.98	56.88	606.74	3,640.38
397. Texture drywall - light hand texture	747.93 SF		0.00	1.82	6.56	273.56	1,641.35
398. Seal/prime (1 coat) then paint (2 coats) the walls	747.93 SF		0.00	2.10	26.98	319.54	1,917.17
-----Door/Windows-----							
399. Paint door/window trim & jamb - Large - 2 coats (per side)	3.00 EA		0.00	60.61	2.11	36.78	220.72
400. Overhead door & hardware - 16' x 7' - High grade	1.00 EA		0.00	2,088.01	169.69	451.54	2,709.24
401. Overhead (garage) door opener - High grade	1.00 EA		0.00	574.40	33.93	121.66	729.99
402. Add for decorative window - overhead door - per window	4.00 EA		0.00	68.62	26.76	60.26	361.50
403. Overhead door weather stop	30.00 LF		0.00	4.20	4.45	26.10	156.55
-----Cabinets-----							
404. Cabinetry - upper (wall) units - utility (unfinished)	51.33 LF		0.00	115.58	295.63	1,245.66	7,474.01
405. Stain & finish cabinetry - upper - faces only	51.33 LF		0.00	52.81	25.37	547.22	3,283.33
406. Cabinetry - lower (base) units - utility (unfinished)	8.50 LF		0.00	141.82	70.70	255.24	1,531.41
407. Seal & paint cabinetry - lower - faces only	10.50 LF		0.00	44.39	4.52	94.12	564.74
408. Cabinetry - full height units - utility (unfinished)	2.50 LF		0.00	168.43	23.62	88.94	533.64



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Garage


Table with 8 columns: DESCRIPTION, QTY, RESET, REMOVE, REPLACE, TAX, O&P, TOTAL. Rows include items like 'Seal & paint full height cabinetry', 'Cabinet knob or pull', 'Countertop subdeck', 'Pegboard', 'Water heater', 'Angle stop valve', 'Plumbing fixture supply line', 'Water line copper cap', 'Gas/water line cap', 'Flexible gas supply line connector', 'Clean with pressure/chemical spray', 'Add on charge for "edge wrap"', 'Carpet - High grade', 'Seal & paint stair stringer', 'Security system'. Totals: Garage (902.79, 5,292.04, 31,752.03) and Total: Main Level (5,783.36, 44,398.00, 266,385.59).

Exterior



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166



Ext_Surfaces

2,489.48 SF Walls
2,489.48 SF Walls & Ceiling

253.51 LF Floor Perimeter

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
----House Siding----							
424. General Laborer - per hour	16.00 HR		0.00	65.00	0.00	208.00	1,248.00
(2) crew for 1 full day to remove all plant life surrounding home to facilitate stucco repairs							
425. Remove Siding - board & batten - cedar	2,489.48 SF		0.66	0.00	0.00	328.62	1,971.68
426. Metal lath & stucco	2,987.38 SF		0.00	9.41	422.34	5,706.72	34,240.31
20% add on to wall calculation due to the 2-3foot roof overhang that has stucco across all soffits							
427. Batt insulation - 6" - R19 - paper / foil faced	2,489.48 SF		0.00	1.84	288.84	973.88	5,843.36
428. Clean stud wall - Heavy	2,987.38 SF		0.00	1.73	8.74	1,035.38	6,212.29
20% add on to wall calculation due to the 2-3foot roof overhang that has stucco across all soffits							
429. Seal stud wall for odor control (shellac)	2,987.38 SF		0.00	1.67	119.42	1,021.66	6,130.00
20% add on to wall calculation due to the 2-3foot roof overhang that has stucco across all soffits							
430. House wrap (air/moisture barrier)	2,489.48 SF		0.00	0.42	50.97	219.32	1,315.87
431. Soda blasting - Extra heavy	106.25 SF		0.00	4.52	14.30	98.92	593.47
Stone facade on front elevation							
432. Tile/stone sealer	106.25 SF		0.00	1.55	3.83	33.70	202.22
Stone fascia on front elevation							
-----Patio Cover-----							
433. Seal & paint wood beam	201.00 SF		0.00	3.25	5.68	131.80	790.73
seal and paint patio cover beams after soda blasting							
434. Soda blasting - Extra heavy	201.00 SF		0.00	4.52	27.04	187.10	1,122.66
soda blast the patio cover beams							
435. Sandblasting	39.03 SF		0.00	1.55	0.72	12.24	73.46
sandblast patio cover columns							
436. Stucco color coat (Redash) - coarse texture	39.03 SF		0.00	6.27	2.63	49.46	296.81
re-stucco the patio cover columns							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Ext_Surfaces

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
437. Hanging light fixture - High grade	2.00 EA		0.00	132.42	11.42	55.24	331.50
-----Eaves and Rakes-----							
438. Stain & finish post/wood beam 6" x 6"	44.50 LF		0.00	8.62	5.29	77.78	466.66
paint under soffit beams							
439. Soda blasting - Extra heavy	89.00 SF		0.00	4.52	11.97	82.86	497.11
soda blast the under soffit overhang beams							
440. Prime & paint exterior fascia - wood, 6"- 8" wide	273.98 LF		0.00	3.54	7.48	195.48	1,172.85
Totals: Ext_Surfaces					980.67	10,418.16	62,508.98
Total: Exterior					980.67	10,418.16	62,508.98
Total: Dwelling					6,764.03	54,816.16	328,894.57

Other Structures

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Concrete walkways-----							
441. R&R Mailbox post - wood	1.00 EA		14.26	98.64	4.87	23.56	141.33
442. R&R Rural mailbox - High grade	1.00 EA		11.40	125.15	9.04	29.12	174.71
443. Clean with pressure/chemical spray - Very heavy	1,807.00 SF		0.00	1.23	3.52	445.22	2,671.35
444. Concrete sealer - brush or spray applied	1,807.00 SF		0.00	1.44	135.66	547.56	3,285.30
-----Flagstone Walkway-----							
445. R&R Paver flagstone - High grade	247.00 SF						SEE BID
446. Tile/stone sealer	247.00 SF						SEE BID
-----Decomposed Granite Area-----							
447. General Laborer - per hour	72.00 HR		0.00	65.00	0.00	936.00	5,616.00
labor to remove the plant life around the area to be worked on the the back yards and shovel out all the compromised river rock and DG and prep area for replacement.							
448. Decorative rock (per CY)	5.00 CY		0.00	140.00	68.25	153.66	921.91
decomposed granite and river rock for the backyard landscaping							



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Hardscapes

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
Totals: Hardscapes					221.34	2,135.12	12,810.60

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
449. Sandblasting	1,475.50 SF						SEE BID
Area of wall is as follows, Liner feet of all CMU Stucco wall is 372.2 LF Front facing area of CMU wall is 917.2 SF Calculation is assuming the entire front face, the 6 inch wall cap, and 12 inches of rear wall above soil line.							
450. Two coat stucco over masonry	1,475.50 SF						SEE BID
451. Paint stucco	2,951.00 SF						SEE BID
452. Seal stucco - elastomeric sealer	2,951.00 SF						SEE BID
453. R&R Ceramic/porcelain tile	76.00 EA						SEE BID
Custom handmade 4.25x4.25 inch enamel decorative tiles, priced per tile from online sources							
454. Prime & paint ornamental iron handrail, 36" to 42" high	206.00 LF		0.00	15.75	78.73	664.64	3,987.87
455. Prime & paint ornamental iron grill	835.17 SF		0.00	4.13	8.14	691.48	4,148.87
456. R&R Rural mailbox - High grade	1.00 EA		11.40	125.15	9.04	29.12	174.71
Totals: CMU Walls					95.91	1,385.24	8,311.45

Gazebos/Outside Structures

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
457. Pergola repairs per BWB Construction, Inc. estimate #EST0016	1.00 EA		0.00	221,160.00	0.00	0.00	221,160.00



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

CONTINUED - Gazebos/Outside Structures

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
Outside Pergola repairs per BWB Construction, Inc.							
Scope of work: Fire re-build of outdoor decks/gazebos and stairs							
1. Provide and install new flagstone walkway stairs to backyard gazebo area							
2. Provide and install new viewing decks							
3. Provide and install new wooden stairs							
4. Provide and install new wooden hand rails at both decks							
5. Remove and replace under deck electrical, plumbing and gas service; also cover area with wooden lattice							
6. Remove and replace CMU walls and cover with stucco and ?? tiles (to match before fire).							
7. Provide and install new wooden gazebo (2) at both decks to match existing condition							
8. Prime and paint all wooden surfaces							
9. Contractor profit and overhead							
Totals: Gazebos/Outside Structures					0.00	0.00	221,160.00
Total: Other Structures					317.25	3,520.36	242,282.05

Extended Limit Coverage

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
458. Amount over Dwelling Limit	1.00 EA		0.00	-42,726.05	0.00	0.00	-42,726.05
459. Amount applied to Dwelling Extended Limits	1.00 EA		0.00	42,726.05	0.00	0.00	42,726.05
460. Amount over Other Structures Limit	1.00 EA		0.00	-2,805.85	0.00	0.00	-2,805.85
461. Amount over Other Structures Extended Limits	1.00 EA		0.00	2,805.85	0.00	0.00	2,805.85
Totals: Extended Limit Coverage					0.00	0.00	0.00

Labor Minimums Applied

DESCRIPTION	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
462. Carpet labor minimum	1.00 EA		0.00	241.43	0.00	48.28	289.71
463. Specialty items labor minimum	1.00 EA		0.00	123.09	0.00	24.62	147.71
464. Door labor minimum	1.00 EA		0.00	70.08	0.00	14.02	84.10
465. Paneling labor minimum	1.00 EA		0.00	111.20	0.00	22.24	133.44
Totals: Labor Minimums Applied					0.00	109.16	654.96
Line Item Totals: SCHACTER_RECON_6B					11,571.58	90,571.70	933,800.37



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Additional Charges	Charge
California Lumber Assessment Fee	0.93
California Carpet Stewardship Assessment Fee	1.09
Additional Charges Total	\$2.02

Grand Total Areas:

8,271.94	SF Walls	2,330.76	SF Ceiling	10,602.71	SF Walls and Ceiling
2,311.00	SF Floor	256.78	SY Flooring	1,096.69	LF Floor Perimeter
0.00	SF Long Wall	0.00	SF Short Wall	896.33	LF Ceil. Perimeter
2,311.00	Floor Area	2,538.51	Total Area	5,807.68	Interior Wall Area
5,491.01	Exterior Wall Area	674.01	Exterior Perimeter of Walls		
2,847.26	Surface Area	28.47	Number of Squares	273.98	Total Perimeter Length
82.97	Total Ridge Length	0.00	Total Hip Length		

Coverage	Item Total	%	ACV Total	%
Dwelling	561,766.58	60.16%	561,769.00	60.16%
Dwelling - Debris Removal	24,369.00	2.61%	24,369.00	2.61%
Dwelling - Code Upgrade	0.00	0.00%	0.00	0.00%
Dwelling - Extended Limit	42,726.05	4.58%	42,726.05	4.58%
Other Structures	302,132.89	32.36%	302,132.89	32.36%
Other Structures - Debris Removal - OS	2,805.85	0.30%	2,805.85	0.30%
Contents	0.00	0.00%	0.00	0.00%
Trees, Plants & Shrubs	0.00	0.00%	0.00	0.00%
Contents - Debris Removal	0.00	0.00%	0.00	0.00%
Total	933,800.37	100.00%	933,802.79	100.00%



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Summary for Dwelling

Line Item Total	474,884.36
California Lumber Assessment Fee	0.93
California Carpet Stewardship Assessment Fee	1.09
Material Sales Tax	10,273.66
Subtotal	485,160.04
Overhead	38,304.48
Profit	38,304.48
Replacement Cost Value	\$561,769.00
Net Claim	\$561,769.00

Jared Boergadine



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Summary for Dwelling - Debris Removal

Line Item Total	24,369.00
Replacement Cost Value	\$24,369.00
Net Claim	\$24,369.00

Jared Boergadine



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Summary for Dwelling - Extended Limit

Line Item Total	42,726.05
Replacement Cost Value	\$42,726.05
Net Claim	\$42,726.05

Dwelling - Additional Coverage Limit Recap

Description	Single Item Limit	Aggregate Limit	RCV	Overage
Dwelling - Debris Removal	\$28,088.45	\$28,088.45	\$24,369.00	\$0.00
Dwelling - Extended Limit	\$112,354.00	\$112,354.00	\$42,726.05	\$0.00
			\$67,095.05	\$0.00

Jared Boergadine



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Summary for Other Structures

Line Item Total	286,871.83
Material Sales Tax	1,297.92
Subtotal	288,169.75
Overhead	6,981.57
Profit	6,981.57
Replacement Cost Value	\$302,132.89
Less Amount Over Limit(s)	(245,955.89)
Net Claim	\$56,177.00

Jared Boergadine



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Summary for Other Structures - Debris Removal - OS

Line Item Total	2,805.85
Replacement Cost Value	\$2,805.85
Net Claim	\$2,805.85

Other Structures - Additional Coverage Limit Recap

Description	Single Item Limit	Aggregate Limit	RCV	Overage
Other Structures - Debris Removal - OS	\$2,808.85	\$2,808.85	\$2,805.85	\$0.00
			\$2,805.85	\$0.00

Jared Boergadine



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Recap by Room

Estimate: SCHACTER_RECON_6B

Demo/Mitigation		169,213.03	20.35%
Coverage: Dwelling	85.60% =	144,844.03	
Coverage: Dwelling - Debris Removal	14.40% =	24,369.00	
General Items		51,628.32	6.21%
Coverage: Dwelling	100.00% =	51,628.32	
Insulation		3,883.65	0.47%
Coverage: Dwelling	100.00% =	3,883.65	
HVAC		31,188.00	3.75%
Coverage: Dwelling	100.00% =	31,188.00	
Electrical		23,017.28	2.77%
Coverage: Dwelling	100.00% =	23,017.28	
Plumbing		723.46	0.09%
Coverage: Dwelling	100.00% =	723.46	
Appliances		19,413.67	2.33%
Coverage: Dwelling	100.00% =	19,413.67	
Window and Patio Doors Replacement		26,285.06	3.16%
Coverage: Dwelling	100.00% =	26,285.06	

Area: Dwelling

Area: Main Level

Entry		8,355.70	1.00%
Coverage: Dwelling	100.00% =	8,355.70	
Kitchen		17,485.44	2.10%
Coverage: Dwelling	100.00% =	17,485.44	
Living Room		41,777.33	5.02%
Coverage: Dwelling	100.00% =	41,777.33	
Fireplace		617.17	0.07%
Coverage: Dwelling	100.00% =	617.17	
Office		6,379.78	0.77%
Coverage: Dwelling	100.00% =	6,379.78	
Office Closet		3,973.62	0.48%
Coverage: Dwelling	100.00% =	3,973.62	
Bedroom 1		11,403.86	1.37%
Coverage: Dwelling	100.00% =	11,403.86	
Bed1 Closet		2,742.38	0.33%
Coverage: Dwelling	100.00% =	2,742.38	
Hall Bathroom 1		14,763.22	1.78%
Coverage: Dwelling	100.00% =	14,763.22	
Master bathroom		13,903.76	1.67%



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Coverage: Dwelling	100.00% =	13,903.76	
Master Bedroom		35,266.08	4.24%
Coverage: Dwelling	100.00% =	35,266.08	
Main Hallway		26,462.86	3.18%
Coverage: Dwelling	100.00% =	26,462.86	
Laundry Room		7,515.83	0.90%
Coverage: Dwelling	100.00% =	7,515.83	
Garage		25,557.20	3.07%
Coverage: Dwelling	100.00% =	25,557.20	
Area Subtotal: Main Level		216,204.23	26.00%
Coverage: Dwelling	100.00% =	216,204.23	
Area: Exterior			
Ext_Surfaces		51,110.15	6.15%
Coverage: Other Structures	100.00% =	51,110.15	
Area Subtotal: Exterior		51,110.15	6.15%
Coverage: Other Structures	100.00% =	51,110.15	
Area Subtotal: Dwelling		267,314.38	32.14%
Coverage: Dwelling	80.88% =	216,204.23	
Coverage: Other Structures	19.12% =	51,110.15	
Area: Other Structures			
Hardscapes		10,454.14	1.26%
Coverage: Other Structures	100.00% =	10,454.14	
CMU Walls		6,830.30	0.82%
Coverage: Other Structures	100.00% =	6,830.30	
Gazebos/Outside Structures		221,160.00	26.59%
Coverage: Other Structures	100.00% =	221,160.00	
Area Subtotal: Other Structures		238,444.44	28.67%
Coverage: Other Structures	100.00% =	238,444.44	
Coverage: Dwelling		-42,726.05	
Coverage: Dwelling - Extended Limit		42,726.05	
Coverage: Other Structures		-2,805.85	
Coverage: Other Structures - Debris Removal - OS		2,805.85	
Labor Minimums Applied		545.80	0.07%
Coverage: Dwelling	77.45% =	422.71	
Coverage: Other Structures	22.55% =	123.09	
Subtotal of Areas		831,657.09	100.00%



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Coverage: Dwelling	57.10% =	474,884.36
Coverage: Dwelling - Debris Removal	2.93% =	24,369.00
Coverage: Dwelling - Extended Limit	5.14% =	42,726.05
Coverage: Other Structures	34.49% =	286,871.83
Coverage: Other Structures - Debris Removal - OS	0.34% =	2,805.85

Total		831,657.09	100.00%
-------	--	------------	---------



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

Recap by Category

O&P Items				Total	%
APPLIANCES				19,176.00	2.05%
Coverage: Dwelling	@	100.00% =		19,176.00	
CABINETRY				22,395.60	2.40%
Coverage: Dwelling	@	100.00% =		22,395.60	
CLEANING				12,041.43	1.29%
Coverage: Dwelling	@	23.25% =		2,799.10	
Coverage: Other Structures	@	76.75% =		9,242.33	
CONCRETE & ASPHALT				2,602.08	0.28%
Coverage: Other Structures	@	100.00% =		2,602.08	
GENERAL DEMOLITION				11,046.44	1.18%
Coverage: Dwelling	@	84.79% =		9,366.32	
Coverage: Other Structures	@	15.21% =		1,680.12	
DOORS				7,113.41	0.76%
Coverage: Dwelling	@	100.00% =		7,113.41	
DRYWALL				34,657.23	3.71%
Coverage: Dwelling	@	100.00% =		34,657.23	
ELECTRICAL				18,265.19	1.96%
Coverage: Dwelling	@	100.00% =		18,265.19	
ELECTRICAL - SPECIAL SYSTEMS				2,049.75	0.22%
Coverage: Dwelling	@	100.00% =		2,049.75	
FLOOR COVERING - CARPET				339.31	0.04%
Coverage: Dwelling	@	100.00% =		339.31	
FLOOR COVERING - STONE				39,620.86	4.24%
Coverage: Dwelling	@	99.58% =		39,456.17	
Coverage: Other Structures	@	0.42% =		164.69	
FLOOR COVERING - CERAMIC TILE				5,550.20	0.59%
Coverage: Dwelling	@	100.00% =		5,550.20	
FLOOR COVERING - WOOD				3,030.28	0.32%
Coverage: Dwelling	@	100.00% =		3,030.28	
PERMITS AND FEES				4,420.00	0.47%
Coverage: Dwelling	@	100.00% =		4,420.00	
FINISH CARPENTRY / TRIMWORK				5,570.13	0.60%
Coverage: Dwelling	@	100.00% =		5,570.13	
FINISH HARDWARE				1,011.56	0.11%
Coverage: Dwelling	@	100.00% =		1,011.56	
HEAT, VENT & AIR CONDITIONING				31,697.10	3.39%
Coverage: Dwelling	@	100.00% =		31,697.10	
INSULATION				9,618.89	1.03%
Coverage: Dwelling	@	41.51% =		3,992.67	
Coverage: Other Structures	@	58.49% =		5,626.22	



Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166

O&P Items				Total	%
LABOR ONLY				37,812.45	4.05%
Coverage: Dwelling	@	100.00% =		37,812.45	
LIGHT FIXTURES				7,066.84	0.76%
Coverage: Dwelling	@	96.25% =		6,802.00	
Coverage: Other Structures	@	3.75% =		264.84	
LANDSCAPING				6,420.00	0.69%
Coverage: Other Structures	@	100.00% =		6,420.00	
MARBLE - CULTURED OR NATURAL				782.86	0.08%
Coverage: Dwelling	@	100.00% =		782.86	
MIRRORS & SHOWER DOORS				6,098.41	0.65%
Coverage: Dwelling	@	100.00% =		6,098.41	
PLUMBING				6,376.85	0.68%
Coverage: Dwelling	@	100.00% =		6,376.85	
PANELING & WOOD WALL FINISHES				314.63	0.03%
Coverage: Dwelling	@	100.00% =		314.63	
PAINTING				78,338.27	8.39%
Coverage: Dwelling	@	82.53% =		64,648.87	
Coverage: Other Structures	@	17.47% =		13,689.40	
SPECIALTY ITEMS				472.03	0.05%
Coverage: Other Structures	@	100.00% =		472.03	
STUCCO & EXTERIOR PLASTER				28,355.97	3.04%
Coverage: Other Structures	@	100.00% =		28,355.97	
TILE				2,596.92	0.28%
Coverage: Dwelling	@	100.00% =		2,596.92	
TEMPORARY REPAIRS				2,832.00	0.30%
Coverage: Dwelling	@	100.00% =		2,832.00	
WINDOWS - SLIDING PATIO DOORS				14,390.25	1.54%
Coverage: Dwelling	@	100.00% =		14,390.25	
WINDOW REGLAZING & REPAIR				2,690.40	0.29%
Coverage: Dwelling	@	100.00% =		2,690.40	
WINDOW TREATMENT				6,280.14	0.67%
Coverage: Dwelling	@	100.00% =		6,280.14	
WINDOWS - VINYL				8,931.76	0.96%
Coverage: Dwelling	@	100.00% =		8,931.76	
WATER EXTRACTION & REMEDIATION				1,318.82	0.14%
Coverage: Dwelling	@	100.00% =		1,318.82	
O&P Items Subtotal				441,284.06	47.26%


Non-O&P Items				Total	%
CLEANING				24,369.00	2.61%
Coverage: Dwelling - Debris Removal	@	100.00% =		24,369.00	




Office of Jared V. Boergadine, Licensed Appraiser & Public Adjuster

Arizona Public Adjuster License #18382965
California Public Adjuster License #2L70602
Colorado Public Adjuster License #608394
Nevada Public Adjuster License # 3443075
Texas Public Adjuster License #2207166


Non-O&P Items			Total	%
HAZARDOUS MATERIAL REMEDIATION			144,844.03	15.51%
Coverage: Dwelling	@	100.00% =	144,844.03	
SPECIALTY ITEMS			221,160.00	23.68%
Coverage: Other Structures	@	100.00% =	221,160.00	
Non-O&P Items Subtotal			390,373.03	41.80%
O&P Items Subtotal			441,284.06	47.26%
Permits and Fees			2.02	0.00%
Coverage: Dwelling	@	100.00% =	2.02	
Material Sales Tax			11,571.58	1.24%
Coverage: Dwelling	@	88.78% =	10,273.66	
Coverage: Other Structures	@	11.22% =	1,297.92	
Overhead			45,286.05	4.85%
Coverage: Dwelling	@	84.58% =	38,304.48	
Coverage: Other Structures	@	15.42% =	6,981.57	
Profit			45,286.05	4.85%
Coverage: Dwelling	@	84.58% =	38,304.48	
Coverage: Other Structures	@	15.42% =	6,981.57	
Total			933,802.79	100.00%

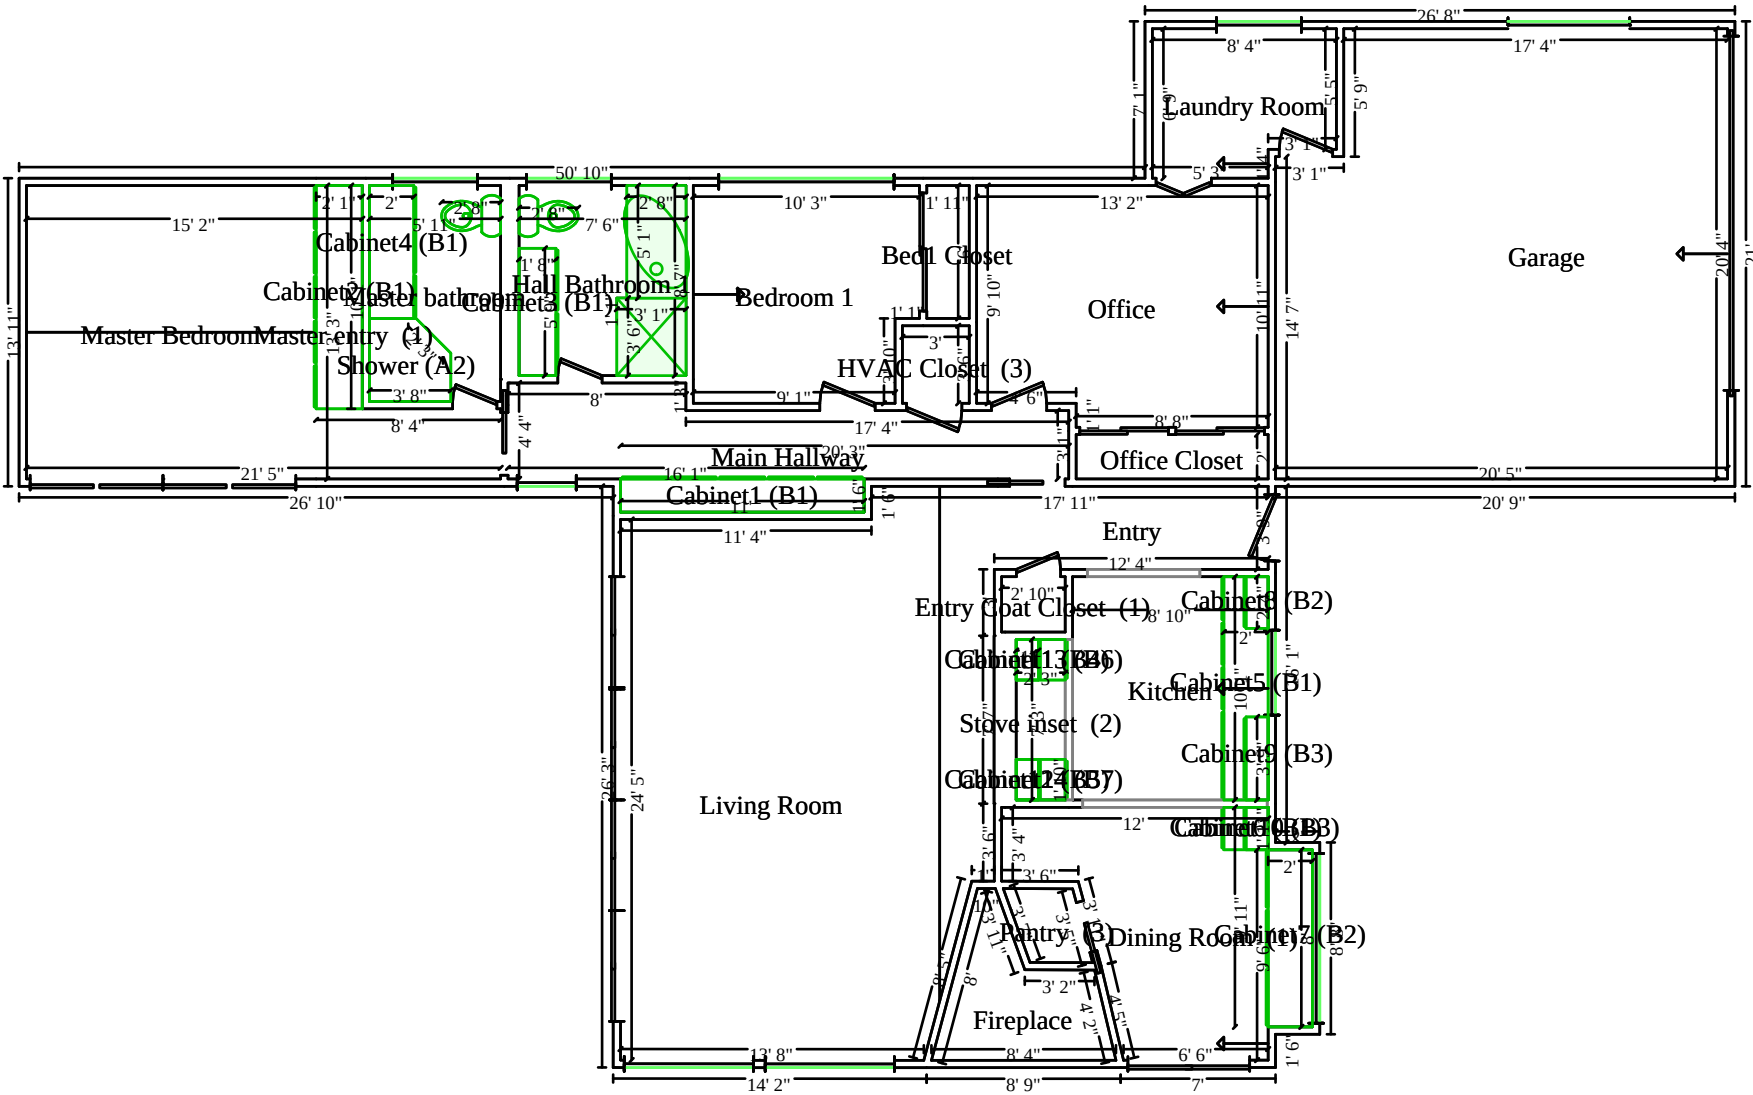


Main Level

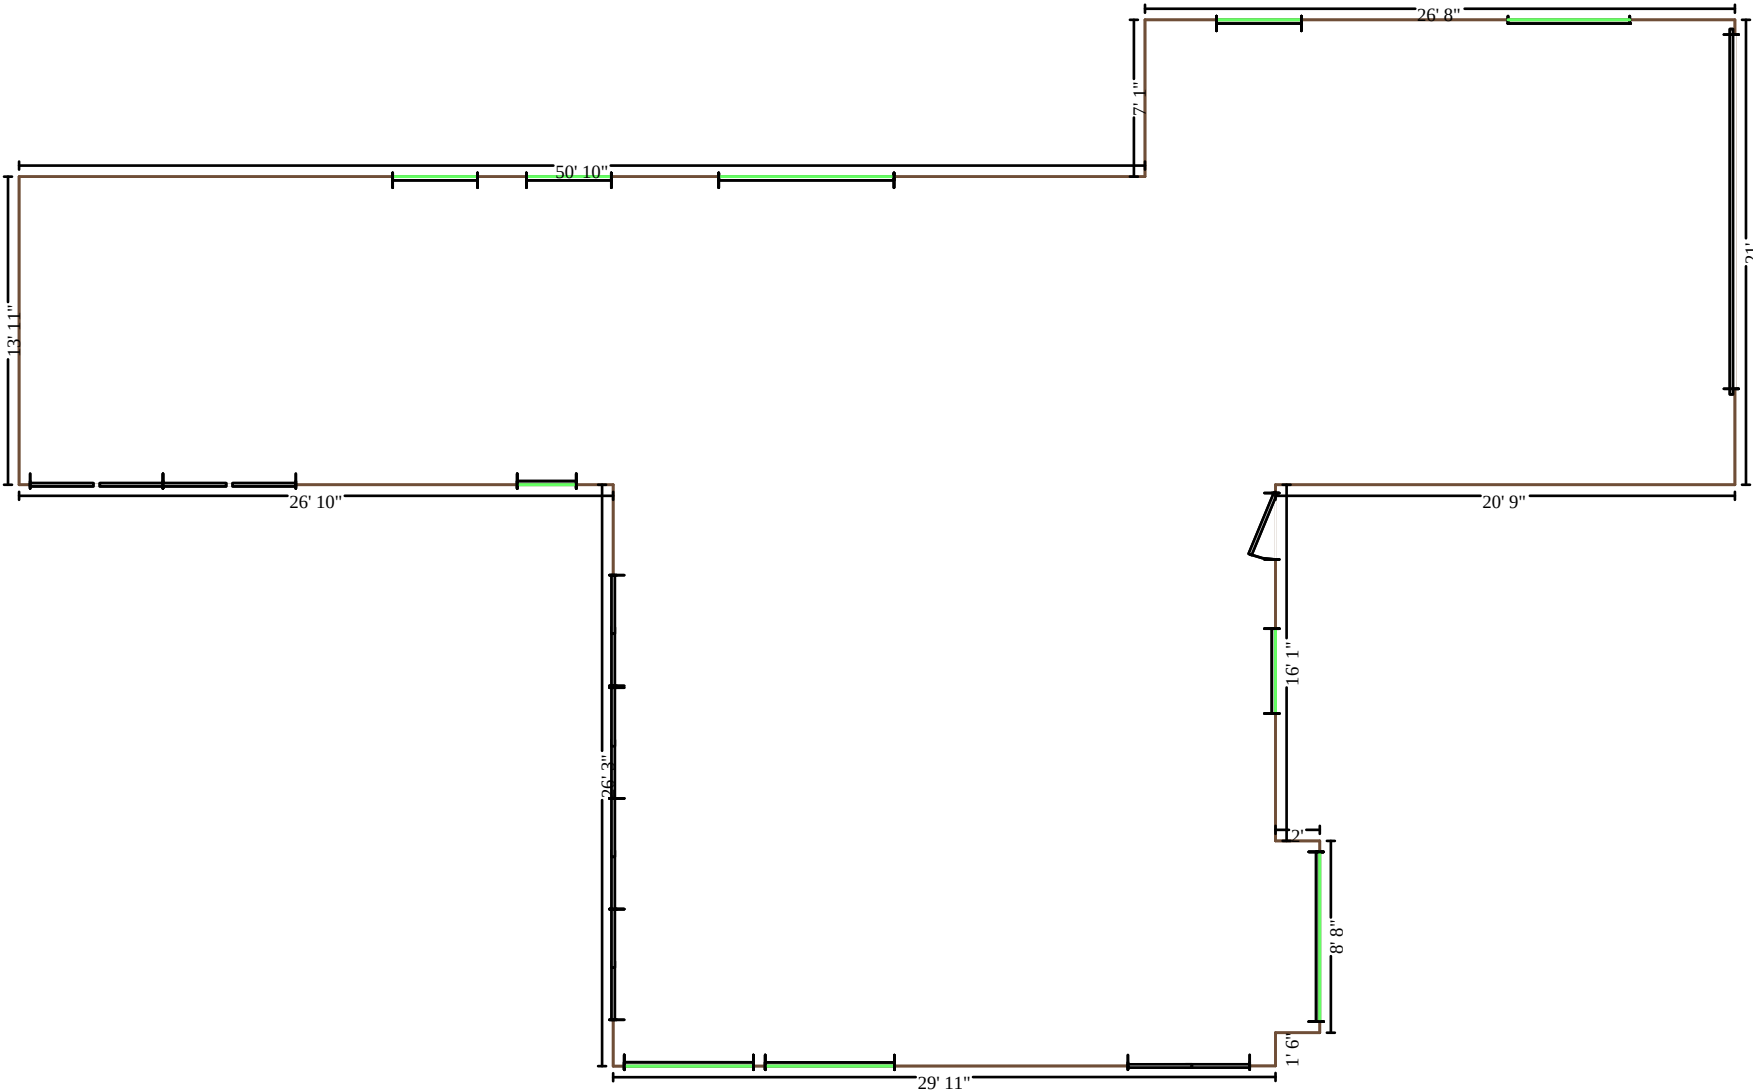


Exterior

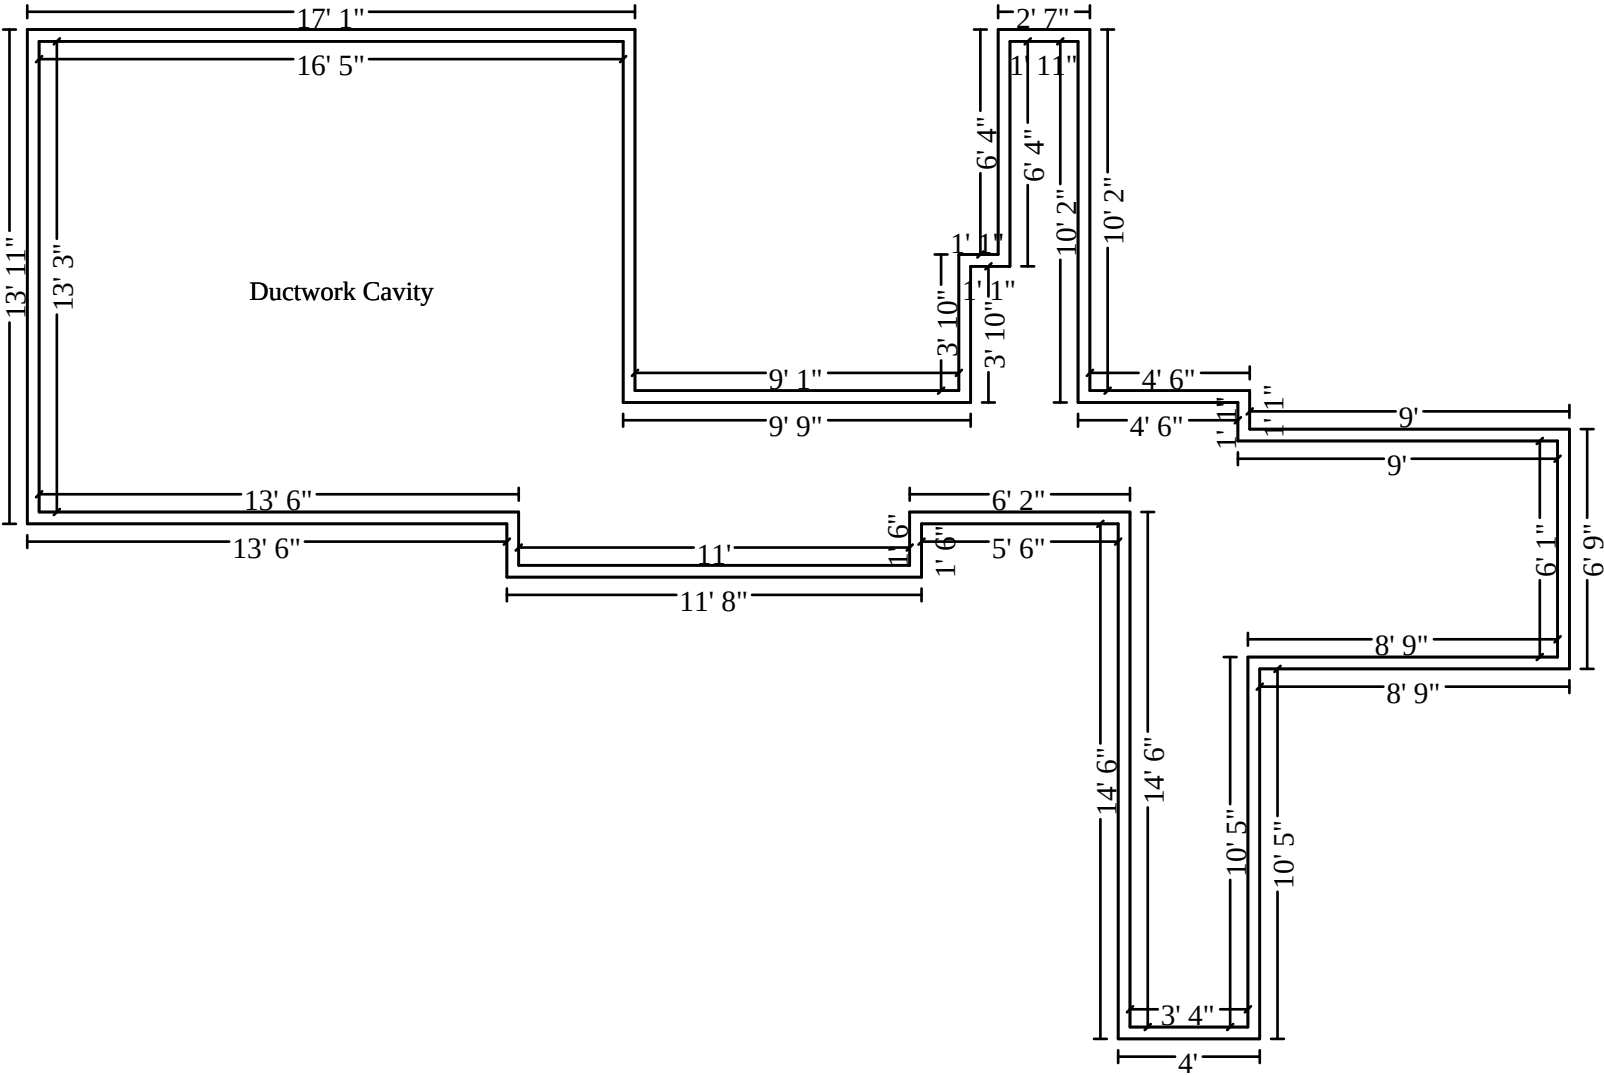


Attic

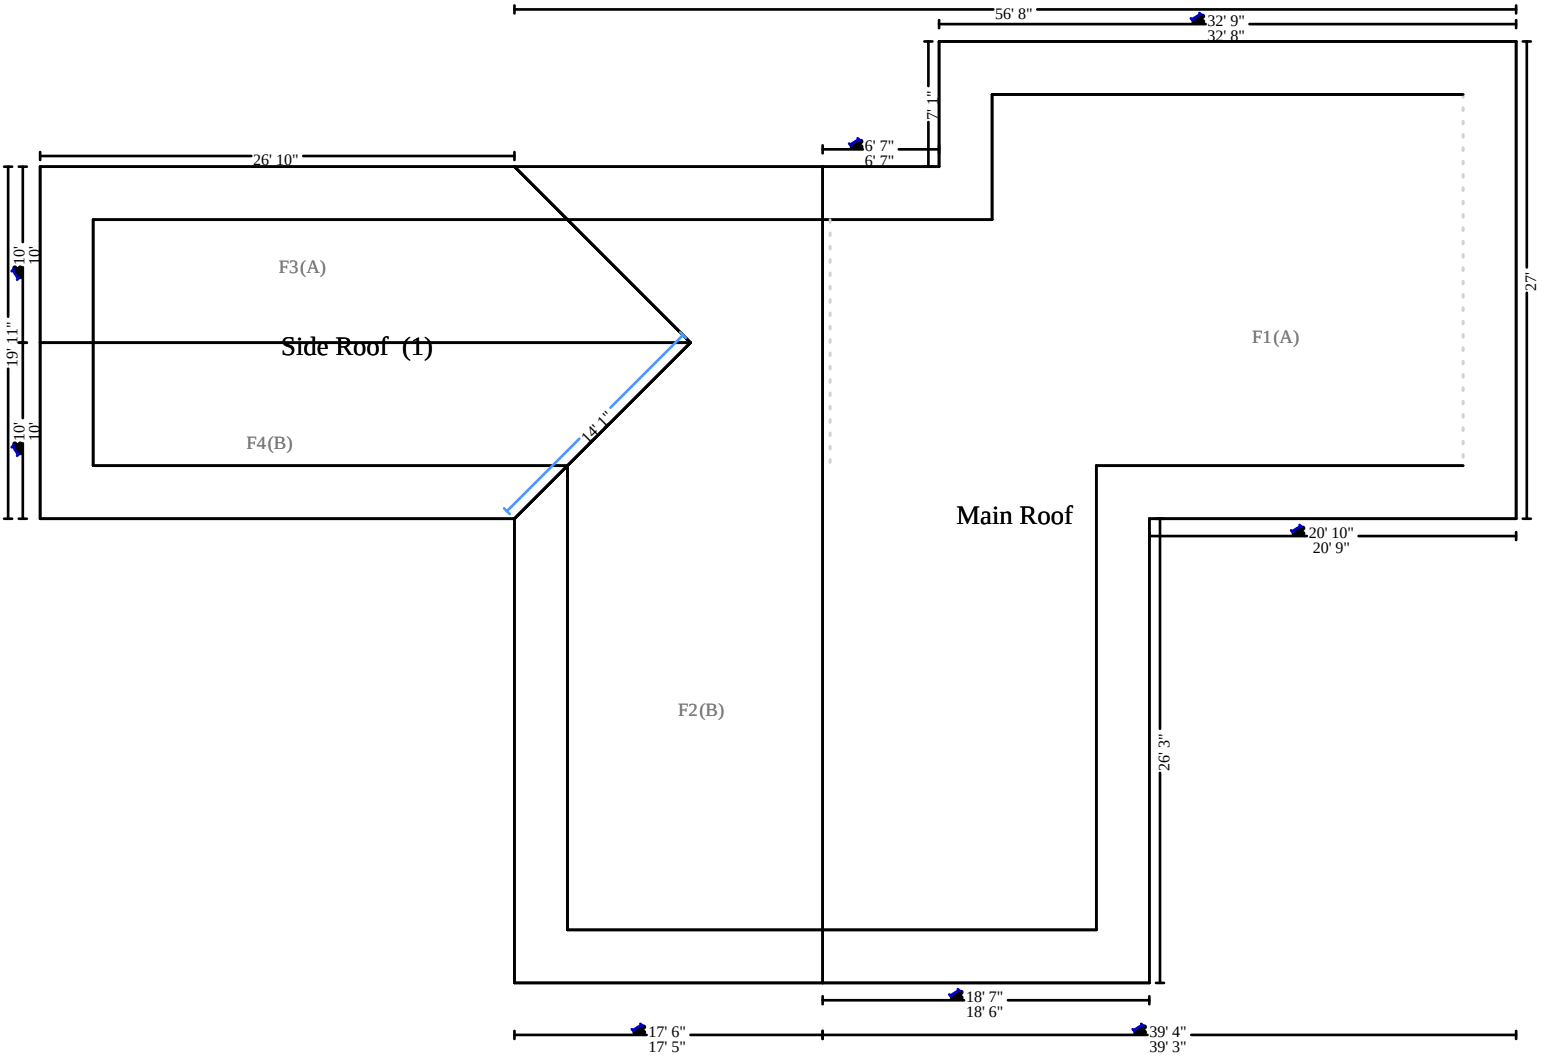

Roof

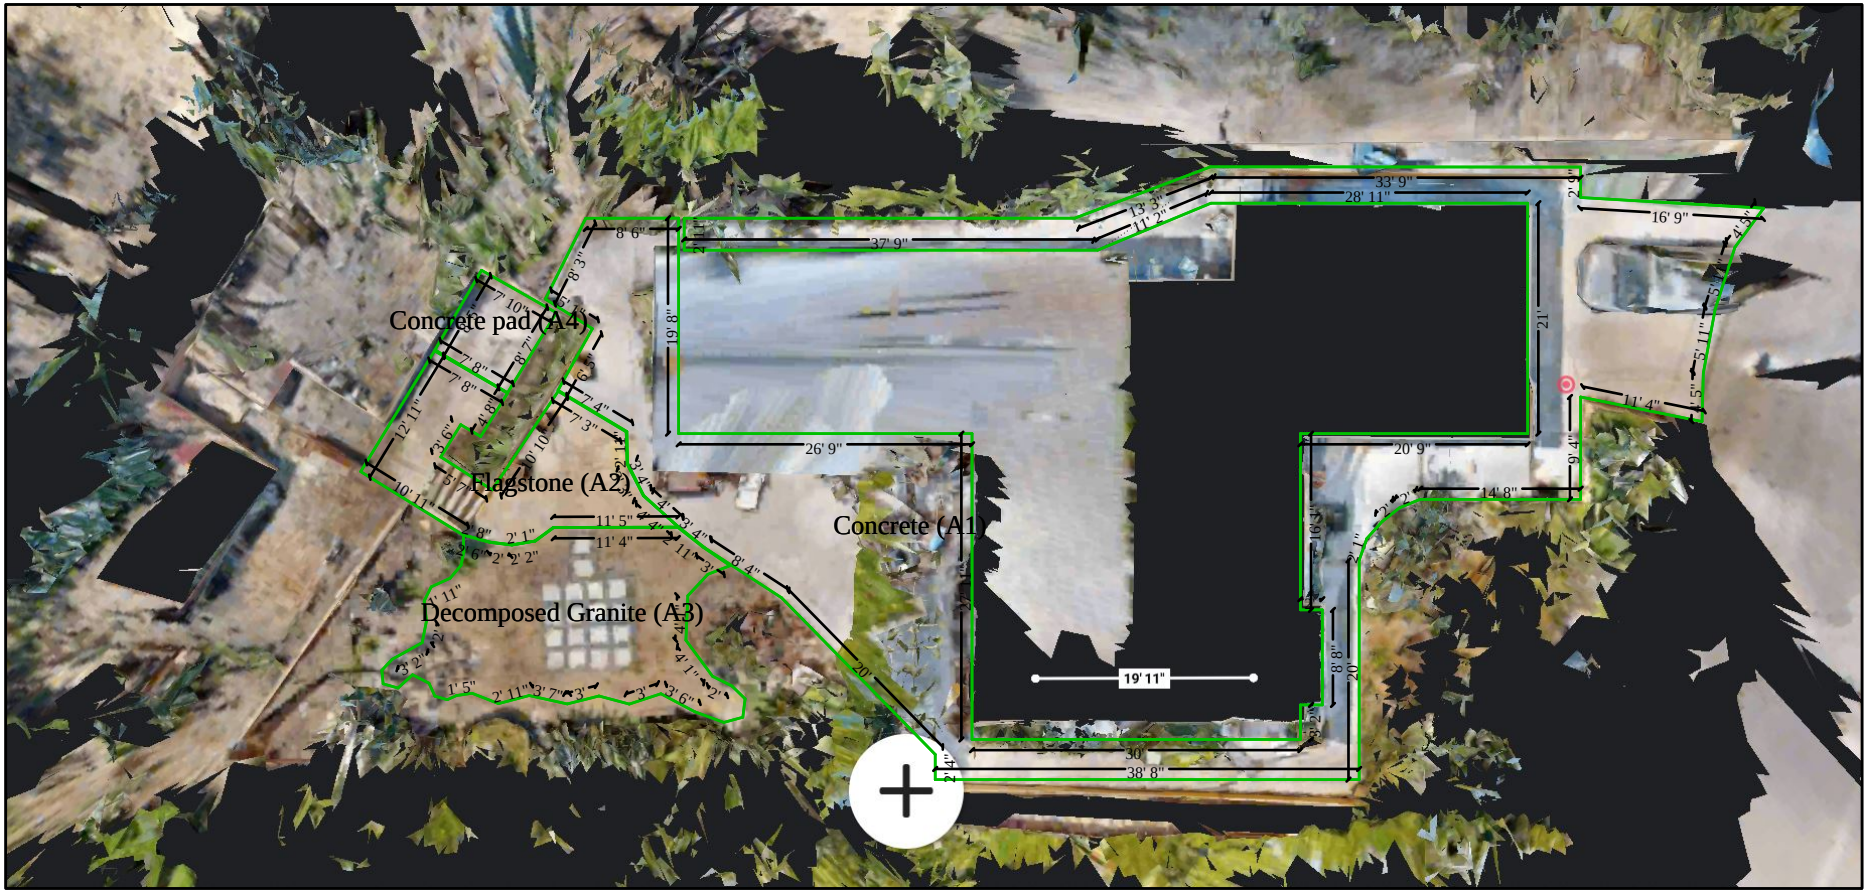

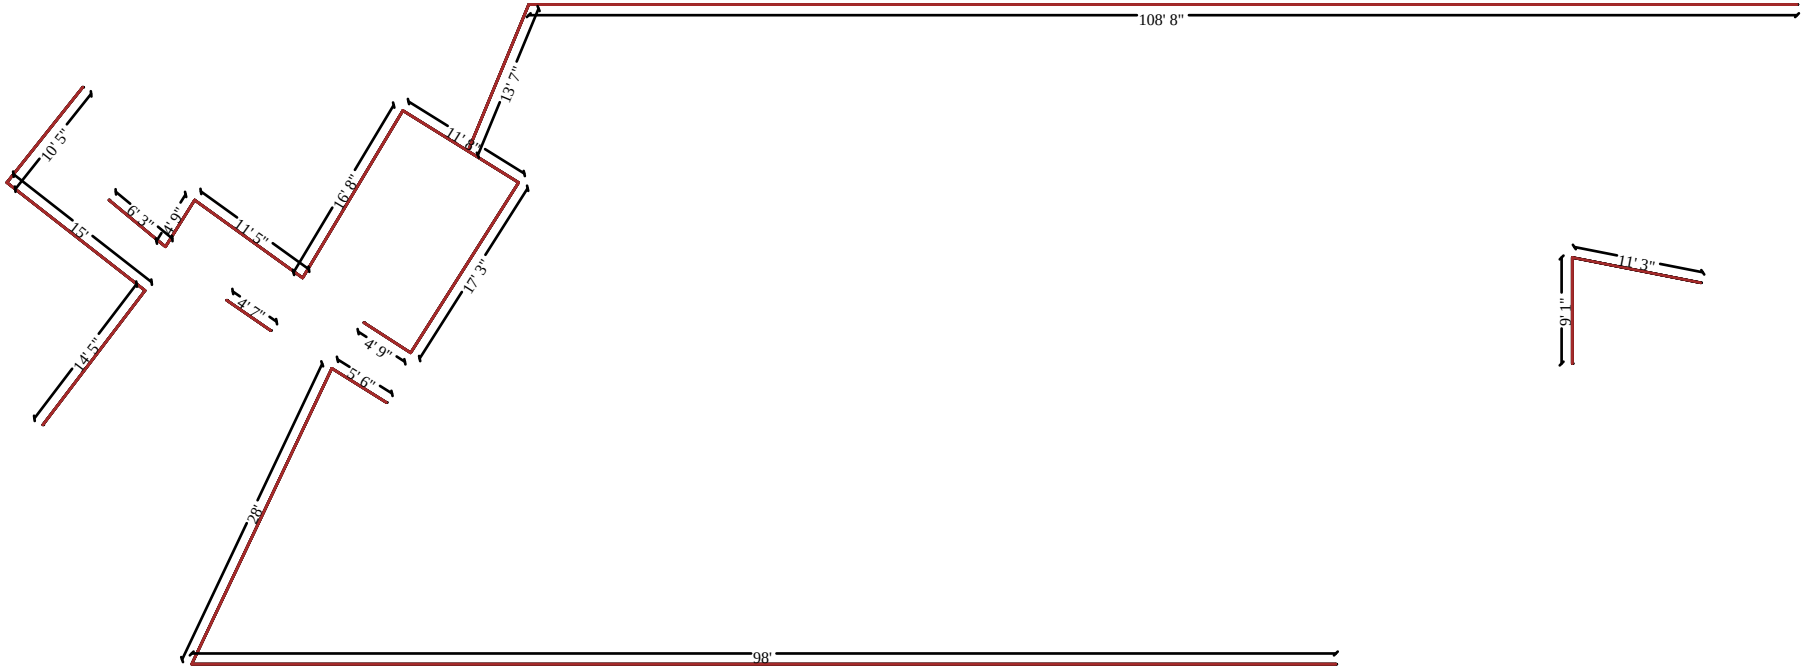

CMU Walls