



**State Farm**  
**P.O. Box 106169**  
**Atlanta, GA 30348-6169**  
**Fax: 1-844-236-3646**  
**statefarmfireclaims@statefarm.com**

## **Structural Damage Claim Policy**

This estimate is priced based on estimated market pricing for the cost of materials, labor, and other factors at the time of the loss.

Adjustments in market pricing and timing of the repairs may impact the final cost of covered repairs. Should you or the contractor you select have questions concerning our estimate, please contact us. If your contractor's estimate is higher than ours, you should contact us prior to beginning repairs. State Farm will work with you and your contractor to determine the actual and necessary cost of covered repairs at the time repairs will be completed, subject to policy terms, conditions and limits.

- We want you to receive quality repair work to restore the damages to your property.
- We will provide you with a detailed estimate of the scope of the damage and costs of repairs. Should the contractor you select have questions concerning our estimate, they should contact your claim representative directly.
- Depending upon the complexity of your repair, our estimate may or may not include an allowance for general contractor's overhead and profit. If you have questions regarding general contractor's overhead and profit and whether general contractor services are appropriate for your loss, please contact your claim representative before proceeding with repairs.
- There may be building codes, ordinances, laws, or regulations that affect the repairs of your property. These items may or may not be covered by your policy. Please contact your claim representative if you have any questions regarding coverage which may be available under your policy.
- State Farm® cannot authorize any contractor to proceed with work on your property. Repairs should proceed only with your authorization.
- State Farm does not guarantee the quality of the workmanship of any contractor or guarantee that the work will be accomplished within any specific time frame.
- It is understood that the contractor is hired by you, our insured, and that they work for you - not State Farm.

If you have any questions or need additional information regarding your claim, please contact your claim representative immediately.



# Building Estimate Summary Guide

This summary guide is based on a sample estimate and is provided for reference only.

Please refer to the estimate for specifics of your claim.

## State Farm Insurance

|                            |                                      |
|----------------------------|--------------------------------------|
| Insured: Smith, Joe & Jane | Estimate: 00-0000-000                |
| Property: 1 Main Street    | Claim number: 00-0000-000            |
| Anywhere, IL 00000-0000    | Policy Number: 00-00-0000-0          |
| Type of Loss: Other        | Price List: ILBL8F_MAR 13            |
| Deductible: \$1,000.00     | Restoration/Service/<br>Remodel      |
|                            | F = Factored In,<br>D = Do Not Apply |

## Summary for Dwelling

|                                                                                           |                      |          |
|-------------------------------------------------------------------------------------------|----------------------|----------|
| Line Item Total [1]                                                                       |                      | 5,953.10 |
| Material Sales Tax                                                                        | @ 10.000% x 1,520.00 |          |
| Subtotal                                                                                  |                      | 6,105.10 |
| General Contractor Overhead [2]                                                           | @ 10.0% x 6,105.10   | 610.51   |
| General Contractor Profit                                                                 | @ 10.0% x 6,105.10   |          |
| Replacement Cost Value (Including General Contractor Overhead and Profit [3])             |                      | 7,326.12 |
| Less Depreciation (Including Taxes) [4]                                                   |                      | (832.50) |
| Less General Contractor Overhead & Profit on Recoverable & Non - recoverable Depreciation |                      | (166.50) |
| Less Deductible [5]                                                                       |                      |          |
| Net Actual Cash Value Payment [6]                                                         |                      |          |

## Maximum Additional Amounts Available If Incurred:

|                                                               |        |
|---------------------------------------------------------------|--------|
| Total Line Item Depreciation (Including Taxes) [4]            | 832.50 |
| Less Non - recoverable Depreciation (Including Taxes) [7]     |        |
| Subtotal                                                      | 312.50 |
| General Contractor O&P on Depreciation                        | 166.50 |
| Less General Contractor O&P on Non - recoverable Depreciation |        |
| Subtotal                                                      |        |
| Total Maximum Additional Amounts Available If Incurred [8]    |        |
| Total Amount of Claim If Incurred [9]                         |        |

Claim Representative

**ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.**

- 1. Line Item Total** – Total value of all line items in the estimate plus possible adjustments for *labor minimums*. *Labor Minimum* is to cover a certain minimum number of hours for drive-time, set up time and applicable administrative costs and repairs.
- 2. General Contractor's Overhead and Profit** – General contractor's charge for coordinating your repairs.
- 3. Replacement Cost Value (RCV)** – Estimated cost to repair or replace damaged property.
- 4. Depreciation** – The decrease in the value of property over a period of time due to wear, tear, condition, and obsolescence. A portion or all of this amount may be eligible for replacement cost benefits.
- 5. Deductible** – The insurer will pay for losses, up to the policy limits, in excess of your applicable deductible.
- 6. Net Actual Cash Value Payment (ACV)** – The repair or replacement cost of the damaged part of the property less *depreciation* and *deductible*.
- 7. Non Recoverable Depreciation** – *Depreciation* applied to items that are not eligible for replacement cost benefits.
- 8. Total Maximum Additional Amount if Incurred** – Total amount of recoverable depreciation after actual repair or replacement of the property.
- 9. Total Amount of Claim if Incurred** – Total amount of the claim, including *net actual cash value payment* and *total maximum additional amount available if incurred*.

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

|                 |                              |                |                             |
|-----------------|------------------------------|----------------|-----------------------------|
| Insured:        | KALYVAS, JAMES               | Estimate:      | 75-79F9-18M3                |
| Property:       | 16640 Via Pacifica           | Claim Number:  | 7579F918M                   |
|                 | Pacific Plsds, CA 90272-1947 | Policy Number: | 71J8B0543                   |
| Home:           | 310-230-0286                 | Price List:    | CALA28_JAN25                |
| Cellular:       | 310-926-6710                 |                | Restoration/Service/Remodel |
| Type of Loss:   | Smoke                        |                |                             |
| Deductible:     | \$10,925.00                  |                |                             |
| Date of Loss:   | 1/7/2025                     |                |                             |
| Date Inspected: | 7/15/2025                    |                |                             |

**Summary for Coverage A - Dwelling - 39 Smoke**

|                                                                           |              |
|---------------------------------------------------------------------------|--------------|
| Line Item Total                                                           | 469,450.02   |
| California Carpet Stewardship Assessment Fee                              | 274.39       |
| California Lumber Assessment Fee                                          | 33.85        |
| Material Sales Tax                                                        | 8,611.66     |
| Subtotal                                                                  | 478,369.92   |
| General Contractor Overhead                                               | 47,837.37    |
| General Contractor Profit                                                 | 47,837.37    |
| Replacement Cost Value (Including General Contractor Overhead and Profit) | 574,044.66   |
| Less Deductible                                                           | (10,925.00)  |
| Net Payment                                                               | \$563,119.66 |

Horn, DeAndre  
William Gandsey

**ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.**

Any person who knowingly presents false or fraudulent information to obtain or amend insurance coverage or to make a claim for the payment of a loss is guilty of a crime and may be subject to fines and confinement in state prison.

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

|                 |                              |                |                             |
|-----------------|------------------------------|----------------|-----------------------------|
| Insured:        | KALYVAS, JAMES               | Estimate:      | 75-79F9-18M3                |
| Property:       | 16640 Via Pacifica           | Claim Number:  | 7579F918M                   |
|                 | Pacific Plsds, CA 90272-1947 | Policy Number: | 71J8B0543                   |
| Home:           | 310-230-0286                 | Price List:    | CALA28_JAN25                |
| Cellular:       | 310-926-6710                 |                | Restoration/Service/Remodel |
| Type of Loss:   | Smoke                        |                |                             |
| Deductible:     | \$0.00                       |                |                             |
| Date of Loss:   | 1/7/2025                     |                |                             |
| Date Inspected: | 7/15/2025                    |                |                             |

**Summary for Coverage A - Dwelling Extension - 39 Smoke**

|                                                                           |             |
|---------------------------------------------------------------------------|-------------|
| Line Item Total                                                           | 31,033.09   |
| Material Sales Tax                                                        | 1,736.98    |
| Subtotal                                                                  | 32,770.07   |
| General Contractor Overhead                                               | 3,277.03    |
| General Contractor Profit                                                 | 3,277.03    |
| Replacement Cost Value (Including General Contractor Overhead and Profit) | 39,324.13   |
| Less Deductible                                                           | (0.00)      |
| Net Payment                                                               | \$39,324.13 |

Horn, DeAndre  
William Gandsey

**ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.**

Any person who knowingly presents false or fraudulent information to obtain or amend insurance coverage or to make a claim for the payment of a loss is guilty of a crime and may be subject to fines and confinement in state prison.

# State Farm

KALYVAS, JAMES

75-79F9-18M3

## General

|                   |                    |                         |
|-------------------|--------------------|-------------------------|
| 0.00 SF Walls     | 0.00 SF Ceiling    | 0.00 SF Walls & Ceiling |
| 0.00 SF Floor     | 0.00 SF Short Wall | 0.00 LF Floor Perimeter |
| 0.00 SF Long Wall |                    | 0.00 LF Ceil. Perimeter |

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

At the time of my inspection, the mitigation repairs were in the process of completion. A significant amount of mitigation had been completed. Some photographs were provided as to the pre-existing conditions/materials and the estimate was also provided. However, Tri-Tech Restoration will not be responsible for any misidentified items, missing repair items, any analysis of the damages or materials, material pricing or any missing items related to unforeseen conditions or county building department requirements. In order to facilitate this estimate, repair line items were added/modified to a previous estimate so that continuity could be provided. No observations or comments were made in regards to any mitigation or temporary services. All personal property repairs are excluded. All AV and alarm/security inspections and repairs are also excluded. All waterproofing issues are excluded from this estimate.

This is a preliminary estimate as there are several inspection reports pending.

|                                                                            |           |          |      |        |             |
|----------------------------------------------------------------------------|-----------|----------|------|--------|-------------|
| 1. Taxes, insurance, permits & fees (Bid Item)                             | 1.00 EA   |          |      |        | AS INCURRED |
| * 2. Asbestos test fee - full service survey - base fee and any abatement  | 1.00 EA   |          |      |        | EXCLUDED    |
| * 3. Lead test fee - full service lead survey - base fee and any abatement | 1.00 EA   |          |      |        | EXCLUDED    |
| * 4. Environmental testing and any remediation                             | 1.00 EA   |          |      |        | EXCLUDED    |
| 5. Temporary toilet (per month)                                            | 5.00 MO   | 225.00   | 0.00 | 225.00 | 1,350.00    |
| 6. Temporary fencing - 5-8 months (per month)                              | 1.00 EA * |          |      |        | EXCLUDED    |
| 7. Temporary power usage (per month)                                       | 1.00 MO   |          |      |        | AS INCURRED |
| 8. High Density Large Inner City- Material staging (Bid Item)              | 1.00 EA   |          |      |        | OPEN ITEM   |
| 9. Dumpster load - Approx. 20 yards, 4 tons of debris                      | 1.00 EA   | 783.00   | 0.00 | 156.60 | 939.60      |
| 10. Dumpster load - Approx. 40 yards, 7-8 tons of debris                   | 2.00 EA   | 1,399.05 | 0.00 | 559.62 | 3,357.72    |

Low boy unit for weighted materials

# State Farm

KALYVAS, JAMES

75-79F9-18M3

## CONTINUED - General

| DESCRIPTION                                                                                                                             | QUANTITY  | UNIT PRICE | TAX  | GCO&P    | RCV       |
|-----------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|------|----------|-----------|
| 11. Single axle dump truck - per load - including dump fees                                                                             | 1.00 EA   | 394.46     | 0.00 | 78.90    | 473.36    |
| Course of construction debris removal                                                                                                   |           |            |      |          |           |
| 12. Plumber - per hour                                                                                                                  | 6.00 HR   | 140.00     | 0.00 | 168.00   | 1,008.00  |
| Exterior drain cleaning                                                                                                                 |           |            |      |          |           |
| 13. Plumbing/gas line air pressure test                                                                                                 | 1.00 EA   | 214.36     | 0.00 | 42.88    | 257.24    |
| Due to the proximity of the fire, the gas line will need to be tested.                                                                  |           |            |      |          |           |
| 14. Residential Supervision / Project Management - per hour                                                                             | 150.00 HR | 86.09      | 0.00 | 2,582.70 | 15,496.20 |
| Complex restoration project involving high end trades, limited parking and staging, HOA regulations, and controlled access to property. |           |            |      |          |           |
| 15. Scaffold - per section (per month)                                                                                                  | 166.00 MO | 112.91     | 0.00 | 3,748.62 | 22,491.68 |
| Exterior area scaffolding is required for stucco and roof repairs.                                                                      |           |            |      |          |           |
| 16. Labor to set up and take down scaffold - per section                                                                                | 83.00 EA  | 44.52      | 0.00 | 739.04   | 4,434.20  |

**Additional damages discovered due to unforeseen conditions or city building code upgrades will be addressed separately and in writing.**

**The repair recommendations presented herein are based solely on visual observations made at the time of our site visit. No engineering or destructive testing was performed. If local government agencies require a licensed engineer to review the repair recommendations, then a state licensed engineer should be retained and the above scope of repair may change. The preparation, review or approval of repair plans is beyond the scope of our estimate.**

**No warranty is made or implied as to future performance of the property based on the repair recommendations. This estimate was prepared in order to assist in the evaluation of an insurance claim. This estimate should not be used by any other parties or for other purposes as it may not contain sufficient information for other than the intended use. The scope of repairs may change based on the notations described in the estimate. All issues regarding policy coverages are expressly excluded from this estimate and should be addressed by the claim representative.**

|                        |  |  |             |                 |                  |
|------------------------|--|--|-------------|-----------------|------------------|
| <b>Totals: General</b> |  |  | <b>0.00</b> | <b>8,301.36</b> | <b>49,808.00</b> |
|------------------------|--|--|-------------|-----------------|------------------|

State Farm

KALYVAS, JAMES

75-79F9-18M3

Mitigation & Cleaning

|                   |                    |                         |
|-------------------|--------------------|-------------------------|
| 0.00 SF Walls     | 0.00 SF Ceiling    | 0.00 SF Walls & Ceiling |
| 0.00 SF Floor     | 0.00 SF Short Wall | 0.00 LF Floor Perimeter |
| 0.00 SF Long Wall |                    | 0.00 LF Ceil. Perimeter |


| DESCRIPTION                                                                                                                                             | QUANTITY | UNIT PRICE | TAX  | GCO&P | RCV  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------|------|-------|------|
| Any and all issues with mitigation repairs and costs are specifically excluded. These include any pool repairs, smoke mitigation or temporary services. |          |            |      |       |      |
| Totals: Mitigation & Cleaning                                                                                                                           |          |            | 0.00 | 0.00  | 0.00 |

Main Structure


First Floor

First Floor

| DESCRIPTION                                     | QUANTITY    | UNIT PRICE | TAX  | GCO&P  | RCV      |
|-------------------------------------------------|-------------|------------|------|--------|----------|
| 17. Final cleaning - construction - Residential | 3,331.40 SF | 0.42       | 0.00 | 279.84 | 1,679.03 |
| Total: First Floor                              |             |            | 0.00 | 279.84 | 1,679.03 |



| Foyer/Staircase              | Height: 20' 6"           |
|------------------------------|--------------------------|
| 1,455.43 SF Walls            | 367.99 SF Ceiling        |
| 1,823.42 SF Walls & Ceiling  | 367.99 SF Floor          |
| 92.19 LF Ceil. Perimeter     | 57.71 LF Floor Perimeter |
| Window                       | 2' 8" X 4'               |
| Door                         | 5' X 6' 8"               |
| Window                       | 1' 7" X 4'               |
| Door                         | 2' 6" X 6' 8"            |
| Missing Wall - Goes to Floor | 3' 9" X 6' 8"            |
|                              | Opens into DEN2          |
|                              | Opens into Exterior      |
|                              | Opens into Exterior      |
|                              | Opens into OFFICE2       |
|                              | Opens into FAMILY_ROOM   |




**Subroom: Entry (3)**

**Height: 19' 6"**

|                           |                          |
|---------------------------|--------------------------|
| 478.64 SF Walls           | 100.00 SF Ceiling        |
| 578.64 SF Walls & Ceiling | 100.00 SF Floor          |
| 28.50 LF Ceil. Perimeter  | 18.33 LF Floor Perimeter |

|                              |                 |                         |
|------------------------------|-----------------|-------------------------|
| Window                       | 1' 6" X 9'      | Opens into Exterior     |
| Door                         | 4' X 9'         | Opens into Exterior     |
| Window                       | 1' 6" X 9'      | Opens into Exterior     |
| Missing Wall - Goes to Floor | 6' 2" X 6' 8"   | Opens into DINING_ROOM  |
| Missing Wall                 | 12' 6" X 19' 6" | Opens into FOYER_STAIR2 |



**Subroom: Hallway to Kitchen (4)**


**Height: 10'**

|                           |                          |
|---------------------------|--------------------------|
| 254.04 SF Walls           | 75.76 SF Ceiling         |
| 329.80 SF Walls & Ceiling | 75.76 SF Floor           |
| 34.46 LF Ceil. Perimeter  | 20.71 LF Floor Perimeter |

|                                     |                      |                                |
|-------------------------------------|----------------------|--------------------------------|
| <b>Door</b>                         | <b>2' 6" X 6' 8"</b> | <b>Opens into KITCHEN</b>      |
| <b>Missing Wall - Goes to Floor</b> | <b>4' 7" X 6' 8"</b> | <b>Opens into DINING_ROOM</b>  |
| <b>Missing Wall</b>                 | <b>5' 3" X 10'</b>   | <b>Opens into FOYER_STAIR2</b> |
| <b>Missing Wall - Goes to Floor</b> | <b>9' 2" X 6' 8"</b> | <b>Opens into FAMILY_ROOM</b>  |

### Subroom: Foyer/Staircase (2)

**Height: 10'**



### Subroom: Foyer/Staircase (1)

**Height: 10'**

|                           |                          |
|---------------------------|--------------------------|
| 304.22 SF Walls           | 73.64 SF Ceiling         |
| 377.86 SF Walls & Ceiling | 73.64 SF Floor           |
| 33.76 LF Ceil. Perimeter  | 28.76 LF Floor Perimeter |


|              |                    |                         |
|--------------|--------------------|-------------------------|
| Door         | 1' 5" X 6' 8"      | Opens into LINEN_CLOSE2 |
| Door         | 5' X 6' 8"         | Opens into Exterior     |
| Missing Wall | 7' 11 13/16" X 10' | Opens into FOYER_STAIR2 |



# State Farm

KALYVAS, JAMES

75-79F9-18M3



## Subroom: Linen Closet (5)

Height: 10'

103.87 SF Walls  
109.29 SF Walls & Ceiling  
10.39 LF Ceil. Perimeter

5.42 SF Ceiling  
5.42 SF Floor  
10.39 LF Floor Perimeter

### Door

1' 5" X 6' 8"

Opens into FOYER\_CONT

| DESCRIPTION                                                    | QUANTITY  | UNIT PRICE | TAX   | GCO&P  | RCV        |
|----------------------------------------------------------------|-----------|------------|-------|--------|------------|
| ----Ceiling----                                                |           |            |       |        |            |
| 18. Seal/prime (1 coat) then paint (1 coat) the ceiling        | 622.81 SF | 1.53       | 13.02 | 193.18 | 1,159.10   |
| 19. Stain & finish crown molding                               | 199.30 LF | 2.78       | 5.11  | 111.84 | 671.00     |
| ----Walls----                                                  |           |            |       |        |            |
| 20. Seal brick with masonry sealer                             | 31.13 SF  | 1.30       | 1.12  | 8.32   | 49.91      |
| 21. Paint baseboard - two coats                                | 135.90 LF | 2.40       | 2.19  | 65.68  | 394.03     |
| -----Floor-----                                                |           |            |       |        |            |
| * 22. Travertine resurfacing - grind and re-seal               | 622.81 SF |            |       |        | AS PER BID |
| All stone repairs are pending an inspection by a stone expert. |           |            |       |        |            |
| * 23. Travertine floor - buff & polish                         | 622.81 SF |            |       |        | AS PER BID |
| 24. Regrout stone floor                                        | 622.81 SF |            |       |        | AS PER BID |
| 25. Tile/stone sealer                                          | 622.81 SF |            |       |        | AS PER BID |
| -----Door/Windows-----                                         |           |            |       |        |            |
| 26. Paint door/window trim & jamb - 2 coats (per side)         | 3.00 EA   | 51.53      | 1.74  | 31.26  | 187.59     |
| 27. Paint door/window trim & jamb - Large - 2 coats (per side) | 14.00 EA  | 60.62      | 9.58  | 171.66 | 1,029.92   |
| 28. Interior door - Detach & reset                             | 5.00 EA   |            |       |        | OPEN ITEM  |

**State Farm**

KALYVAS, JAMES


75-79F9-18M3

**CONTINUED - Foyer/Staircase**

| DESCRIPTION                                                       | QUANTITY | UNIT PRICE | TAX   | GCO&P  | RCV        |
|-------------------------------------------------------------------|----------|------------|-------|--------|------------|
| 29. Paint door slab only - 2 coats (per side)                     | 10.00 EA | 60.55      | 9.61  | 123.02 | 738.13     |
| 30. Prime & paint door slab only - exterior (per side)            | 2.00 EA  |            |       |        | OPEN ITEM  |
| 31. Prime & paint French door slab only - exterior (per side)     | 8.00 EA  | 168.01     | 14.11 | 271.64 | 1,629.83   |
| 32. Lube/recondition operable window                              | 2.00 EA  | 162.52     | 0.31  | 65.06  | 390.41     |
| -----Fixtures-----                                                |          |            |       |        |            |
| 33. R&R Recessed light fixture - High grade                       | 18.00 EA |            |       |        | OPEN ITEM  |
| 34. R&R Light fixture - wall sconce - High grade                  | 2.00 EA  |            |       |        | OPEN ITEM  |
| 35. R&R Chandelier - Wrought iron - 48"-60" diameter              | 1.00 EA  |            |       |        | OPEN ITEM  |
| -----Stairs-----                                                  |          |            |       |        |            |
| 36. Detach & Reset Window drapery - hardware - single rod - Large | 1.00 EA  | 51.34      | 0.00  | 10.26  | 61.60      |
| 37. R&R Travertine tile - Premium grade                           | 28.89 SF |            |       |        | OPEN ITEM  |
| 38. R&R Mortar bed for tile                                       | 28.89 SF |            |       |        | OPEN ITEM  |
| 39. Tile/stone sealer                                             | 28.89 SF |            |       |        | AS PER BID |
| 40. Carpet - Premium grade                                        | 78.20 SF | 7.91       | 50.89 | 133.90 | 803.35     |
| Material pricing should be verified. Area adjacent to laundry     |          |            |       |        |            |
| 41. R&R Carpet pad - Premium grade                                | 42.50 SF | 1.66       | 5.41  | 15.20  | 91.16      |

## CONTINUED - Foyer/Staircase

| DESCRIPTION                                         | QUANTITY | UNIT PRICE | TAX           | GCO&P           | RCV             |
|-----------------------------------------------------|----------|------------|---------------|-----------------|-----------------|
| 42. Step charge for "waterfall" carpet installation | 17.00 EA | 13.20      | 1.07          | 45.10           | 270.57          |
| <b>Totals: Foyer/Staircase</b>                      |          |            | <b>114.16</b> | <b>1,246.12</b> | <b>7,476.60</b> |



Den

Height: 10'

702.20 SF Walls  
 1,019.22 SF Walls & Ceiling  
 70.22 LF Ceil. Perimeter

317.02 SF Ceiling  
 317.02 SF Floor  
 70.22 LF Floor Perimeter

|        |             |                         |
|--------|-------------|-------------------------|
| Window | 2' 8" X 4'  | Opens into FOYER_STAIR2 |
| Window | 3' X 4'     | Opens into Exterior     |
| Window | 4' 6" X 4'  | Opens into Exterior     |
| Window | 2' 10" X 4' | Opens into Exterior     |

| DESCRIPTION                                                          | QUANTITY  | UNIT PRICE | TAX  | GCO&P  | RCV       |
|----------------------------------------------------------------------|-----------|------------|------|--------|-----------|
| ---Ceiling---                                                        |           |            |      |        |           |
| 43. R&R Crown molding - 7-piece - stain grade                        | 70.22 LF  |            |      |        | OPEN ITEM |
| 44. Stain & finish crown molding                                     | 70.22 LF  | 2.78       | 1.80 | 39.40  | 236.41    |
| 45. Prep wall for wallpaper                                          | 317.02 SF |            |      |        | OPEN ITEM |
| 46. Wallpaper - Premium grade                                        | 317.02 SF |            |      |        | OPEN ITEM |
| ---Walls---                                                          |           |            |      |        |           |
| 47. 1/2" drywall - hung, taped, with smooth wall finish              | 90.54 SF  | 5.97       | 5.85 | 109.28 | 655.65    |
| Missing stucco paper observed on exterior where drywall was removed. |           |            |      |        |           |
| 48. Tape joint for new to existing drywall - per LF                  | 21.25 LF  | 16.57      | 0.75 | 70.58  | 423.44    |

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - Den**

| DESCRIPTION                                                    | QUANTITY  | UNIT PRICE | TAX    | GCO&P  | RCV         |
|----------------------------------------------------------------|-----------|------------|--------|--------|-------------|
| 49. Soda blasting - Heavy                                      | 62.00 SF  | 3.80       | 7.30   | 48.58  | 291.48      |
| 50. Stain & finish column                                      | 12.00 LF  | 10.34      | 1.22   | 25.06  | 150.36      |
| 51. Baseboard - 4 1/4"                                         | 70.22 LF  | 5.70       | 18.75  | 83.82  | 502.82      |
| 52. Paint baseboard - two coats                                | 70.22 LF  | 2.40       | 1.13   | 33.92  | 203.58      |
| 53. Prep wall for wallpaper                                    | 702.20 SF |            |        |        | OPEN ITEM   |
| 54. Wallpaper - Premium grade                                  | 702.20 SF |            |        |        | OPEN ITEM   |
| 55. Rewire\wire - avg. residence - boxes & wiring              | 130.00 SF |            |        |        | OPEN ITEM   |
| <b>-----Floor-----</b>                                         |           |            |        |        |             |
| 56. Engineered wood flooring - High grade                      | 317.02 SF | 13.72      | 260.81 | 922.06 | 5,532.38    |
| Material pricing should be verified.                           |           |            |        |        |             |
| 57. Underlayment - 5/8" BC plywood                             | 317.02 SF | 3.52       | 66.56  | 236.50 | 1,418.97    |
| 58. Add for glued down wood flooring appl. over wood substrate | 317.02 SF | 5.97       | 33.43  | 385.20 | 2,311.24    |
| <b>-----Door/Windows-----</b>                                  |           |            |        |        |             |
| 59. R&R Window shade - roll up                                 | 2.00 EA   |            |        |        | BID PENDING |
| 60. R&R Window shade - roll up - Large                         | 1.00 EA   |            |        |        | BID PENDING |
| 61. Paint door/window trim & jamb - 2 coats (per side)         | 3.00 EA   | 51.53      | 1.74   | 31.26  | 187.59      |
| 62. Paint door/window trim & jamb - Large - 2 coats (per side) | 13.00 EA  | 60.62      | 8.89   | 159.40 | 956.35      |


# State Farm

KALYVAS, JAMES

75-79F9-18M3

## CONTINUED - Den

| DESCRIPTION                                       | QUANTITY | UNIT PRICE | TAX           | GCO&P           | RCV              |
|---------------------------------------------------|----------|------------|---------------|-----------------|------------------|
| 63. Lube/recondition operable window              | 3.00 EA  | 162.52     | 0.46          | 97.62           | 585.64           |
| -----Fixtures-----                                |          |            |               |                 |                  |
| 64. R&R Recessed light fixture - High grade       | 11.00 EA |            |               |                 | OPEN ITEM        |
| 65. R&R Light fixture - wall sconce - High grade  | 2.00 EA  |            |               |                 | OPEN ITEM        |
| 66. In-wall / In-ceiling speaker - Detach & reset | 2.00 EA  | 27.64      | 0.00          | 11.06           | 66.34            |
| -----Fireplace-----                               |          |            |               |                 |                  |
| 67. Soda blasting - Heavy                         | 20.00 SF | 3.80       | 2.36          | 15.68           | 94.04            |
| 68. Tile/stone sealer                             | 20.00 SF | 1.52       | 0.70          | 6.22            | 37.32            |
| <b>Totals: Den</b>                                |          |            | <b>411.75</b> | <b>2,275.64</b> | <b>13,653.61</b> |



### Bathroom

Height: 10'

259.29 SF Walls  
300.95 SF Walls & Ceiling  
25.93 LF Ceil. Perimeter

41.66 SF Ceiling  
41.66 SF Floor  
25.93 LF Floor Perimeter

Door

2' 6" X 6' 8"

Opens into Exterior

| DESCRIPTION                   | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV       |
|-------------------------------|----------|------------|-----|-------|-----------|
| -----Ceiling-----             |          |            |     |       |           |
| 69. Wallpaper - Premium grade | 41.66 SF |            |     |       | OPEN ITEM |
| 70. Prep wall for wallpaper   | 41.66 SF |            |     |       | OPEN ITEM |

**State Farm**

KALYVAS, JAMES


75-79F9-18M3

**CONTINUED - Bathroom**

| DESCRIPTION                                                                                                  | QUANTITY  | UNIT PRICE | TAX  | GCO&P | RCV        |
|--------------------------------------------------------------------------------------------------------------|-----------|------------|------|-------|------------|
| <b>----Walls----</b>                                                                                         |           |            |      |       |            |
| 71. Prep wall for wallpaper                                                                                  | 119.81 SF |            |      |       | OPEN ITEM  |
| 72. Wallpaper - Premium grade                                                                                | 119.81 SF |            |      |       | OPEN ITEM  |
| Wallpaper appeared intact; however, it will require reinspection after further cleaning.                     |           |            |      |       |            |
| 73. R&R Travertine tile - Premium grade                                                                      | 101.56 SF |            |      |       | OPEN ITEM  |
| Surface appeared intact. No visible damages observed at the time of inspection. Reinspection after cleaning. |           |            |      |       |            |
| * 74. R&R Travertine tile - bullnose - 2" x 6" - Premium grade                                               | 25.93 LF  |            |      |       | OPEN ITEM  |
| 75. Add-on for tile feature strip - Premium grade                                                            | 25.93 LF  |            |      |       | OPEN ITEM  |
| 76. Add-on for diagonal tile installation                                                                    | 12.96 SF  |            |      |       | OPEN ITEM  |
| 77. Tile/stone sealer                                                                                        | 101.56 SF | 1.53       | 3.57 | 31.80 | 190.76     |
| <b>-----Floor-----</b>                                                                                       |           |            |      |       |            |
| * 78. Travertine resurfacing - grind and re-seal                                                             | 41.66 SF  |            |      |       | AS PER BID |
| * 79. Travertine floor - buff & polish                                                                       | 41.66 SF  |            |      |       | AS PER BID |
| 80. RegROUT stone floor                                                                                      | 41.66 SF  |            |      |       | AS PER BID |
| 81. Tile/stone sealer                                                                                        | 41.66 SF  |            |      |       | AS PER BID |
| <b>-----Doors and Windows-----</b>                                                                           |           |            |      |       |            |
| 82. Paint door/window trim & jamb - Large - 2 coats (per side)                                               | 2.00 EA   | 60.62      | 1.37 | 24.52 | 147.13     |

CONTINUED - Bathroom

| DESCRIPTION                                          | QUANTITY | UNIT PRICE | TAX  | GCO&P  | RCV       |
|------------------------------------------------------|----------|------------|------|--------|-----------|
| 83. Lube/recondition operable window                 | 1.00 EA  | 162.52     | 0.15 | 32.54  | 195.21    |
| 84. R&R Window screen, 1 - 9 SF                      | 1.00 EA  | 51.22      | 3.66 | 10.98  | 65.86     |
| 85. Detach & Reset Window drapery - hardware - Small | 1.00 EA  | 51.34      | 0.00 | 10.26  | 61.60     |
| -----Plumbing-----                                   |          |            |      |        |           |
| 86. Toilet - Detach & reset                          | 1.00 EA  | 305.16     | 0.87 | 61.22  | 367.25    |
| 87. Pedestal sink - Detach & reset                   | 1.00 EA  |            |      |        | OPEN ITEM |
| -----Lights-----                                     |          |            |      |        |           |
| 88. R&R Light fixture - wall sconce - High grade     | 2.00 EA  |            |      |        | OPEN ITEM |
| Pending electrical inspection                        |          |            |      |        |           |
| 89. R&R Recessed light fixture - High grade          | 2.00 EA  |            |      |        | OPEN ITEM |
| Totals: Bathroom                                     |          |            | 9.62 | 171.32 | 1,027.81  |



Garage Hall

Height: 10'


|                           |                          |
|---------------------------|--------------------------|
| 263.09 SF Walls           | 54.30 SF Ceiling         |
| 317.40 SF Walls & Ceiling | 54.30 SF Floor           |
| 26.31 LF Ceil. Perimeter  | 26.31 LF Floor Perimeter |

Opens into GARAGE

# State Farm

KALYVAS, JAMES

75-79F9-18M3



Missing Wall

Missing Wall

Missing Wall

## Subroom: Laundry Room (2)

Height: 13' 5"

110.13 SF Walls  
128.80 SF Walls & Ceiling  
10.60 LF Ceil. Perimeter

18.66 SF Ceiling  
34.61 SF Floor  
13.30 LF Floor Perimeter

1' 10 5/16" X 13' 4 13/16"


Opens into GARAGE\_HALL2

2' 10 7/8" X 13' 4 13/16"

Opens into STAIRS1

3' 7/8" X 13' 4 13/16"

Opens into GARAGE\_HALL2



Missing Wall

## Subroom: Laundry Room (1)

Height: 8'

54.88 SF Walls  
60.63 SF Walls & Ceiling  
6.86 LF Ceil. Perimeter

5.74 SF Ceiling  
5.74 SF Floor  
6.86 LF Floor Perimeter


2' 10 7/8" X 8'

Opens into STAIRS

| DESCRIPTION                                                    | QUANTITY  | UNIT PRICE | TAX  | GCO&P  | RCV       |
|----------------------------------------------------------------|-----------|------------|------|--------|-----------|
| ----Ceiling----                                                |           |            |      |        |           |
| 90. Seal/prime (1 coat) then paint (1 coat) the ceiling        | 78.71 SF  | 1.53       | 1.65 | 24.42  | 146.50    |
| ----Walls----                                                  |           |            |      |        |           |
| 91. Prime & paint cold air return (cover)                      | 1.00 EA   | 27.67      | 0.62 | 5.66   | 33.95     |
| 92. Seal/prime (1 coat) then paint (1 coat) the walls          | 428.11 SF | 1.53       | 8.95 | 132.80 | 796.76    |
| 93. R&R Baseboard - 4 1/4"                                     | 46.47 LF  |            |      |        | OPEN ITEM |
| 94. Seal (1 coat) & paint (1 coat) baseboard                   | 46.47 LF  | 2.49       | 0.66 | 23.28  | 139.65    |
| ----Floor----                                                  |           |            |      |        |           |
| 95. Tile/stone sealer                                          | 94.66 SF  | 1.53       | 3.33 | 29.62  | 177.78    |
| ----Door/Windows----                                           |           |            |      |        |           |
| 96. Paint door/window trim & jamb - Large - 2 coats (per side) | 2.00 EA   | 60.62      | 1.37 | 24.52  | 147.13    |



| DESCRIPTION                                                   | QUANTITY | UNIT PRICE | TAX          | GCO&P         | RCV             |
|---------------------------------------------------------------|----------|------------|--------------|---------------|-----------------|
| 97. Paint door slab only - 2 coats (per side)                 | 4.00 EA  | 60.55      | 3.85         | 49.22         | 295.27          |
| -----Stairs-----                                              |          |            |              |               |                 |
| 98. Remove Tear out wood flooring and subfloor                | 94.66 SF |            |              |               | OPEN ITEM       |
| All policy coverage issues are excluded.                      |          |            |              |               |                 |
| 99. Engineered wood flooring - High grade                     | 94.66 SF |            |              |               | OPEN ITEM       |
| 100. Stair nosing - for wood flooring                         | 46.47 LF |            |              |               | OPEN ITEM       |
| 101. Engineered wood flooring - step charge (tread and riser) | 57.00 LF |            |              |               | OPEN ITEM       |
| <b>Totals: Garage Hall</b>                                    |          |            | <b>20.43</b> | <b>289.52</b> | <b>1,737.04</b> |



| Dining Room               |                                | Height: 10' |
|---------------------------|--------------------------------|-------------|
| 548.33 SF Walls           | 262.56 SF Ceiling              |             |
| 810.89 SF Walls & Ceiling | 262.56 SF Floor                |             |
| 63.96 LF Ceil. Perimeter  | 53.21 LF Floor Perimeter       |             |
| <b>4' 3" X 4'</b>         | <b>Opens into Exterior</b>     |             |
| <b>5' 2" X 4'</b>         | <b>Opens into Exterior</b>     |             |
| <b>3' 11" X 4'</b>        | <b>Opens into Exterior</b>     |             |
| <b>6' 2" X 6' 8"</b>      | <b>Opens into ENTRY1</b>       |             |
| <b>4' 7" X 6' 8"</b>      | <b>Opens into HALLWAY_TO_K</b> |             |
| <b>2' 6" X 6' 8"</b>      | <b>Opens into KITCHEN</b>      |             |

| DESCRIPTION     | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-----------------|----------|------------|-----|-------|-----|
| ----Ceiling---- |          |            |     |       |     |

**State Farm**

KALYVAS, JAMES


75-79F9-18M3

**CONTINUED - Dining Room**

| DESCRIPTION                                                        | QUANTITY  | UNIT PRICE | TAX   | GCO&P  | RCV        |
|--------------------------------------------------------------------|-----------|------------|-------|--------|------------|
| 102. Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 810.89 SF | 1.53       | 16.95 | 251.54 | 1,509.15   |
| 103. Stain & finish crown molding                                  | 115.12 LF | 2.78       | 2.95  | 64.60  | 387.58     |
| 104. Prime & paint cold air return (cover)                         | 2.00 EA   | 27.67      | 1.24  | 11.30  | 67.88      |
| <b>----Walls----</b>                                               |           |            |       |        |            |
| 105. Stain & finish column                                         | 12.00 LF  | 10.34      | 1.22  | 25.06  | 150.36     |
| 106. R&R Baseboard - 4 1/4"                                        | 53.21 LF  |            |       |        | OPEN ITEM  |
| 107. Paint baseboard - two coats                                   | 53.21 LF  | 2.40       | 0.86  | 25.72  | 154.28     |
| <b>-----Floor-----</b>                                             |           |            |       |        |            |
| * 108. Travertine resurfacing - grind and re-seal                  | 262.56 SF |            |       |        | AS PER BID |
| * 109. Travertine floor - buff & polish                            | 262.56 SF |            |       |        | AS PER BID |
| 110. Regrout stone floor                                           | 262.56 SF |            |       |        | AS PER BID |
| 111. Tile/stone sealer                                             | 262.56 SF | 1.53       | 9.23  | 82.18  | 493.13     |
| <b>-----Door/Windows-----</b>                                      |           |            |       |        |            |
| 112. Detach & Reset Window drapery - hardware - Small              | 3.00 EA   | 51.34      | 0.00  | 30.80  | 184.82     |
| 113. Paint door/window trim & jamb - Large - 2 coats (per side)    | 6.00 EA   | 60.62      | 4.10  | 73.56  | 441.38     |
| 114. R&R Window screen, 1 - 9 SF                                   | 4.00 EA   | 51.16      | 14.65 | 43.88  | 263.17     |
| 115. R&R Window screen, 10 - 16 SF                                 | 1.00 EA   | 67.44      | 5.21  | 14.52  | 87.17      |

## CONTINUED - Dining Room

| DESCRIPTION                                        | QUANTITY | UNIT PRICE | TAX          | GCO&P         | RCV             |
|----------------------------------------------------|----------|------------|--------------|---------------|-----------------|
| 116. Lube/recondition operable window              | 3.00 EA  | 162.52     | 0.46         | 97.62         | 585.64          |
| -----Fixtures-----                                 |          |            |              |               |                 |
| 117. R&R Recessed light fixture - High grade       | 7.00 EA  |            |              |               | OPEN ITEM       |
| 118. In-wall / In-ceiling speaker - Detach & reset | 2.00 EA  | 27.64      | 0.00         | 11.06         | 66.34           |
| <b>Totals: Dining Room</b>                         |          |            | <b>56.87</b> | <b>731.84</b> | <b>4,390.90</b> |

**Pantry****Height: 8'**


200.43 SF Walls  
 232.13 SF Walls & Ceiling  
 25.05 LF Ceil. Perimeter


31.70 SF Ceiling  
 31.70 SF Floor  
 25.05 LF Floor Perimeter

**Door****2' 6" X 6' 8"****Opens into KITCHEN**

| DESCRIPTION                                                        | QUANTITY  | UNIT PRICE | TAX  | GCO&P | RCV        |
|--------------------------------------------------------------------|-----------|------------|------|-------|------------|
| ----Ceiling----                                                    |           |            |      |       |            |
| 119. Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 232.13 SF | 1.53       | 4.85 | 72.02 | 432.03     |
| ----Walls----                                                      |           |            |      |       |            |
| 120. R&R Baseboard - 4 1/4"                                        | 25.05 LF  |            |      |       | OPEN ITEM  |
| 121. Seal (1 coat) & paint (1 coat) baseboard                      | 25.05 LF  | 2.49       | 0.36 | 12.56 | 75.29      |
| ----Floor-----                                                     |           |            |      |       |            |
| * 122. Travertine resurfacing - grind and re-seal                  | 31.70 SF  |            |      |       | AS PER BID |

| DESCRIPTION                                                     | QUANTITY | UNIT PRICE | TAX         | GCO&P        | RCV           |
|-----------------------------------------------------------------|----------|------------|-------------|--------------|---------------|
| * 123. Travertine floor - buff & polish                         | 31.70 SF |            |             |              | AS PER BID    |
| 124. Regrout stone floor                                        | 31.70 SF |            |             |              | AS PER BID    |
| 125. Tile/stone sealer                                          | 31.70 SF |            |             |              | AS PER BID    |
| -----Door/Windows-----                                          |          |            |             |              |               |
| 126. Paint door/window trim & jamb - Large - 2 coats (per side) | 1.00 EA  | 60.62      | 0.68        | 12.26        | 73.56         |
| -----Fixtures-----                                              |          |            |             |              |               |
| 127. Breaker panel - 70 to 150 amp - Detach & reset             | 1.00 EA  |            |             |              | OPEN ITEM     |
| <b>Totals: Pantry</b>                                           |          |            | <b>5.89</b> | <b>96.84</b> | <b>580.88</b> |





**Subroom: Family Room Bar (1)**

**Height: 9'**

|                           |                         |
|---------------------------|-------------------------|
| 104.44 SF Walls           | 32.77 SF Ceiling        |
| 137.21 SF Walls & Ceiling | 18.29 SF Floor          |
| 14.94 LF Ceil. Perimeter  | 6.01 LF Floor Perimeter |

## Missing Wall

**1' 2" X 9'**

**Opens into FAMILY\_ROOM**

## Missing Wall

5' 6 3/4" X 9'

**Opens into FAMILY\_ROOM**

## Missing Wall

**9 1/8" X 9'**

**Opens into FAMILY\_ROOM**

## Window

**1' 1" X 3'**

## Opens into Exterior

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

----Ceiling----

|                                                          |           |      |       |        |          |
|----------------------------------------------------------|-----------|------|-------|--------|----------|
| 128. Seal/prime (1 coat) then paint (1 coat) the ceiling | 588.86 SF | 1.53 | 12.31 | 182.66 | 1,095.93 |
| 129. Stain & finish crown molding                        | 103.43 LF | 2.78 | 2.65  | 58.04  | 348.23   |

----Walls----

|                                                 |           |      |       |        |           |
|-------------------------------------------------|-----------|------|-------|--------|-----------|
| 130. Painting - Faux (special effects) - 3 part | 765.59 SF | 5.10 | 40.73 | 789.04 | 4,734.28  |
| 131. R&R Baseboard - 4 1/4"                     | 56.86 LF  |      |       |        | OPEN ITEM |
| 132. Paint baseboard - two coats                | 56.86 LF  | 2.40 | 0.92  | 27.48  | 164.86    |

-----Floor-----

|                                                   |           |            |
|---------------------------------------------------|-----------|------------|
| * 133. Travertine resurfacing - grind and re-seal | 138.13 SF | AS PER BID |
| * 134. Travertine floor - buff & polish           | 138.13 SF | AS PER BID |
| 135. Regrout stone floor                          | 138.13 SF | AS PER BID |
| 136. Remove Tear out wood flooring and subfloor   | 574.38 SF | OPEN ITEM  |
| 137. Engineered wood flooring - High grade        | 574.38 SF | OPEN ITEM  |

**State Farm**

KALYVAS, JAMES


75-79F9-18M3

**CONTINUED - Family Room**

| DESCRIPTION                                                        | QUANTITY  | UNIT PRICE | TAX   | GCO&P  | RCV       |
|--------------------------------------------------------------------|-----------|------------|-------|--------|-----------|
| 138. Add for glued down wood flooring appl. over wood substrate    | 574.38 SF |            |       |        | OPEN ITEM |
| 139. Underlayment - 5/8" BC plywood                                | 574.38 SF |            |       |        | OPEN ITEM |
| 140. Tile/stone sealer                                             | 276.25 SF | 1.53       | 9.71  | 86.48  | 518.85    |
| -----Door/Windows-----                                             |           |            |       |        |           |
| 141. Detach & Reset Window drapery - hardware - single rod - Large | 2.00 EA   | 51.34      | 0.00  | 20.54  | 123.22    |
| 142. R&R Window screen, 1 - 9 SF                                   | 2.00 EA   | 51.16      | 7.32  | 21.92  | 131.56    |
| 143. Paint door/window trim & jamb - 2 coats (per side)            | 2.00 EA   | 51.53      | 1.16  | 20.86  | 125.08    |
| 144. Paint door/window trim & jamb - Large - 2 coats (per side)    | 11.00 EA  | 60.62      | 7.52  | 134.86 | 809.20    |
| 145. Paint door slab only - 2 coats (per side)                     | 2.00 EA   | 60.55      | 1.92  | 24.60  | 147.62    |
| 146. Prime & paint French door slab only - exterior (per side)     | 12.00 EA  | 168.01     | 21.16 | 407.46 | 2,444.74  |
| 147. R&R Patio door screen, 36" wide                               | 3.00 EA   | 102.16     | 24.98 | 66.30  | 397.76    |
| Pricing to be verified                                             |           |            |       |        |           |
| 148. Lube/recondition sliding glass door                           | 3.00 EA   | 212.27     | 0.76  | 127.52 | 765.09    |
| 149. Lube/recondition operable window                              | 3.00 EA   | 162.52     | 0.46  | 97.62  | 585.64    |
| -----Fixtures-----                                                 |           |            |       |        |           |
| 150. R&R Recessed light fixture - High grade                       | 13.00 EA  |            |       |        | OPEN ITEM |

CONTINUED - Family Room

| DESCRIPTION                                             | QUANTITY | UNIT PRICE | TAX           | GCO&P           | RCV              |
|---------------------------------------------------------|----------|------------|---------------|-----------------|------------------|
| 151. R&R Light fixture - wall sconce - High grade       | 2.00 EA  |            |               |                 | OPEN ITEM        |
| 152. R&R Built-in theater speaker system - Deluxe grade | 1.00 EA  |            |               |                 | OPEN ITEM        |
| -----Fireplace-----                                     |          |            |               |                 |                  |
| 153. Soda blasting - Heavy                              | 56.00 SF | 3.80       | 6.60          | 43.88           | 263.28           |
| 154. Tile/stone sealer                                  | 56.00 SF | 1.52       | 1.97          | 17.42           | 104.51           |
| <b>Totals: Family Room</b>                              |          |            | <b>140.17</b> | <b>2,126.68</b> | <b>12,759.85</b> |



Kitchen

Height: 10' 6"

|                             |                          |
|-----------------------------|--------------------------|
| 751.40 SF Walls             | 539.42 SF Ceiling        |
| 1,290.81 SF Walls & Ceiling | 398.08 SF Floor          |
| 98.28 LF Ceil. Perimeter    | 44.04 LF Floor Perimeter |

|              |                       |                         |
|--------------|-----------------------|-------------------------|
| Door         | 2' 6" X 6' 8"         | Opens into Exterior     |
| Door         | 2' 6" X 6' 8"         | Opens into Exterior     |
| Window       | 4' 6" X 4'            | Opens into Exterior     |
| Window       | 2' 3" X 4'            | Opens into Exterior     |
| Door         | 2' 6" X 6' 8"         | Opens into PANTRY       |
| Door         | 2' 6" X 6' 8"         | Opens into DINING_ROOM  |
| Door         | 2' 6" X 6' 8"         | Opens into HALLWAY_TO_K |
| Missing Wall | 6' 4 9/16" X 10' 6"   | Opens into FAMILY_ROOM  |
| Missing Wall | 10' 6 11/16" X 10' 6" | Opens into FAMILY_ROOM  |

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

The evaluation, analysis and future performance of any appliance or fixture is excluded from this estimate.

-----Ceiling-----

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - Kitchen**

| DESCRIPTION                                                                             | QUANTITY  | UNIT PRICE | TAX   | GCO&P  | RCV        |
|-----------------------------------------------------------------------------------------|-----------|------------|-------|--------|------------|
| 155. Seal/prime (1 coat) then paint (1 coat) the ceiling                                | 539.42 SF | 1.53       | 11.27 | 167.32 | 1,003.90   |
| 156. Seal (1 coat) & paint (2 coats)crown molding, oversized                            | 63.50 LF  | 3.96       | 1.63  | 50.62  | 303.71     |
| 157. Prime & paint cold air return (cover)                                              | 3.00 EA   | 27.67      | 1.86  | 16.98  | 101.85     |
| <b>----Walls----</b>                                                                    |           |            |       |        |            |
| 158. Seal/prime (1 coat) then paint (1 coat) the walls                                  | 751.40 SF | 1.53       | 15.70 | 233.06 | 1,398.40   |
| 159. Paint baseboard - two coats                                                        | 44.04 LF  | 2.40       | 0.71  | 21.28  | 127.69     |
| 160. R&R Ceramic/porcelain tile - High grade                                            | 58.13 SF  | 27.62      | 45.78 | 330.28 | 1,981.61   |
| Per the owner, the mitigation cleaning caused discoloring to the backsplash and insert. |           |            |       |        |            |
| 161. R&R Mosaic - ceramic/porcelain tile - Premium grade                                | 8.75 SF   | 44.01      | 19.22 | 80.86  | 485.17     |
| 162. Add-on for tile backsplash installation                                            | 58.13 SF  | 27.70      | 0.00  | 322.04 | 1,932.24   |
| 163. Seal grout on tile wall                                                            | 58.13 SF  | 2.62       | 1.05  | 30.68  | 184.03     |
| <b>-----Floor-----</b>                                                                  |           |            |       |        |            |
| * 164. Travertine resurfacing - grind and re-seal                                       | 398.08 SF |            |       |        | AS PER BID |
| * 165. Travertine floor - buff & polish                                                 | 398.08 SF |            |       |        | AS PER BID |
| 166. RegROUT stone floor                                                                | 398.08 SF |            |       |        | AS PER BID |
| 167. Tile/stone sealer                                                                  | 398.08 SF |            |       |        | AS PER BID |

**-----Door/Windows-----**



**State Farm**

KALYVAS, JAMES


75-79F9-18M3

**CONTINUED - Kitchen**

| DESCRIPTION                                                                                         | QUANTITY | UNIT PRICE | TAX   | GCO&P  | RCV       |
|-----------------------------------------------------------------------------------------------------|----------|------------|-------|--------|-----------|
| 168. R&R Window screen, 1 - 9 SF                                                                    | 2.00 EA  | 51.16      | 7.32  | 21.92  | 131.56    |
| 169. R&R Window screen, 10 - 16 SF                                                                  | 3.00 EA  | 67.44      | 15.62 | 43.60  | 261.54    |
| 170. Paint door/window trim & jamb - 2 coats (per side)                                             | 2.00 EA  | 51.53      | 1.16  | 20.86  | 125.08    |
| 171. Paint door/window trim & jamb - Large - 2 coats (per side)                                     | 7.00 EA  | 60.62      | 4.79  | 85.82  | 514.95    |
| 172. Prime & paint French door slab only - exterior (per side)                                      | 12.00 EA | 168.01     | 21.16 | 407.46 | 2,444.74  |
| 173. R&R Patio door screen, 36" wide                                                                | 3.00 EA  | 102.16     | 24.98 | 66.30  | 397.76    |
| 174. Lube/recondition operable window                                                               | 5.00 EA  | 162.52     | 0.77  | 162.68 | 976.05    |
| -----Fixtures-----                                                                                  |          |            |       |        |           |
| 175. R&R Recessed light fixture - High grade                                                        | 6.00 EA  |            |       |        | OPEN ITEM |
| remove and replace light fixtures due to etching and electrical damages from smoke based corrosion. |          |            |       |        |           |
| -----Cabinets-----                                                                                  |          |            |       |        |           |
| 176. Detach & Reset Cabinet knob or pull - Premium grade                                            | 92.00 EA | 3.57       | 0.00  | 65.68  | 394.12    |
| 177. Countertop - Granite or Marble - buff & polish                                                 | 99.00 SF | 18.52      | 4.51  | 367.60 | 2,205.59  |
| 178. Stain & finish cabinetry - lower - inside and out                                              | 42.08 LF | 108.22     | 36.42 | 918.06 | 5,508.38  |
| 179. Stain & finish cabinetry - upper - inside and out                                              | 18.67 LF | 93.20      | 14.99 | 351.00 | 2,106.03  |
| 180. Stain & finish full height cabinetry - inside and out                                          | 11.83 LF | 144.44     | 18.07 | 345.36 | 2,072.16  |
| 181. Stain & finish paneling                                                                        | 35.00 SF | 2.64       | 1.50  | 18.78  | 112.68    |

CONTINUED - Kitchen

| DESCRIPTION            | QUANTITY | UNIT PRICE | TAX           | GCO&P           | RCV              |
|------------------------|----------|------------|---------------|-----------------|------------------|
| <b>Totals: Kitchen</b> |          |            | <b>248.51</b> | <b>4,128.24</b> | <b>24,769.24</b> |




Office

Height: 10'

|                             |                          |
|-----------------------------|--------------------------|
| 726.41 SF Walls             | 310.68 SF Ceiling        |
| 1,037.09 SF Walls & Ceiling | 310.68 SF Floor          |
| 80.77 LF Ceil. Perimeter    | 69.77 LF Floor Perimeter |

|                        |               |                         |
|------------------------|---------------|-------------------------|
| Door                   | 2' 6" X 6' 8" | Opens into FAMILY_ROOM  |
| Door                   | 5' X 6' 8"    | Opens into Exterior     |
| Door                   | 2' 7" X 6' 8" | Opens into OFFICE_BATHR |
| Window                 | 2' 6" X 4'    | Opens into Exterior     |
| Window                 | 2' 6" X 4'    | Opens into Exterior     |
| Door                   | 6' X 8'       | Opens into Exterior     |
| Window - Goes to Floor | 1' 7" X 8'    | Opens into Exterior     |
| Door                   | 2' 6" X 6' 8" | Opens into FOYER_STAIR2 |



Subroom: Office Closet (1)

Height: 8'

|                           |                          |
|---------------------------|--------------------------|
| 154.96 SF Walls           | 17.94 SF Ceiling         |
| 172.90 SF Walls & Ceiling | 17.94 SF Floor           |
| 19.37 LF Ceil. Perimeter  | 19.37 LF Floor Perimeter |

|      |               |                    |
|------|---------------|--------------------|
| Door | 2' 7" X 6' 8" | Opens into OFFICE2 |
|------|---------------|--------------------|

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

---Ceiling---

|                                                          |           |      |      |        |        |
|----------------------------------------------------------|-----------|------|------|--------|--------|
| 182. Seal/prime (1 coat) then paint (1 coat) the ceiling | 328.62 SF | 1.53 | 6.87 | 101.94 | 611.60 |
| 183. Stain & finish crown molding                        | 38.00 LF  | 2.78 | 0.97 | 21.32  | 127.93 |

---Walls---

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - Office**

| DESCRIPTION                                                        | QUANTITY  | UNIT PRICE | TAX    | GCO&P  | RCV       |
|--------------------------------------------------------------------|-----------|------------|--------|--------|-----------|
| 184. Wallpaper - Premium grade                                     | 881.37 SF | 4.17       | 148.20 | 764.70 | 4,588.21  |
| 185. Prep wall for wallpaper                                       | 881.37 SF | 1.10       | 0.00   | 193.90 | 1,163.41  |
| 186. Texture drywall - smooth / skim coat                          | 881.37 SF | 2.67       | 11.72  | 473.00 | 2,837.98  |
| Removal of wallpaper damaged the surface of the drywall.           |           |            |        |        |           |
| 187. Seal the walls w/latex based stain blocker - one coat         | 881.37 SF | 1.01       | 8.37   | 179.72 | 1,078.27  |
| 188. Paint baseboard - two coats                                   | 89.14 LF  | 2.40       | 1.44   | 43.06  | 258.44    |
| <b>-----Floor-----</b>                                             |           |            |        |        |           |
| 189. Remove Tear out wood flooring and subfloor                    | 328.62 SF |            |        |        | OPEN ITEM |
| 190. Engineered wood flooring - High grade                         | 328.62 SF |            |        |        | OPEN ITEM |
| 191. Add for glued down wood flooring appl. over wood substrate    | 328.62 SF |            |        |        | OPEN ITEM |
| 192. Underlayment - 5/8" BC plywood                                | 328.62 SF |            |        |        | OPEN ITEM |
| <b>-----Door/Windows-----</b>                                      |           |            |        |        |           |
| 193. Detach & Reset Window drapery - hardware - single rod - Large | 1.00 EA   | 51.34      | 0.00   | 10.26  | 61.60     |
| 194. R&R Window screen, 1 - 9 SF                                   | 2.00 EA   | 51.16      | 7.32   | 21.92  | 131.56    |
| 195. Paint door/window trim & jamb - 2 coats (per side)            | 2.00 EA   | 51.53      | 1.16   | 20.86  | 125.08    |
| 196. Paint door/window trim & jamb - Large - 2 coats (per side)    | 11.00 EA  | 60.62      | 7.52   | 134.86 | 809.20    |

**State Farm**

KALYVAS, JAMES

75-79F9-18M3


**CONTINUED - Office**

| DESCRIPTION                                                    | QUANTITY | UNIT PRICE | TAX           | GCO&P           | RCV              |
|----------------------------------------------------------------|----------|------------|---------------|-----------------|------------------|
| 197. Interior door - Detach & reset                            | 1.00 EA  | 114.34     | 0.10          | 22.88           | 137.32           |
| 198. Paint door slab only - 2 coats (per side)                 | 8.00 EA  | 60.55      | 7.69          | 98.42           | 590.51           |
| 199. Prime & paint French door slab only - exterior (per side) | 8.00 EA  | 168.01     | 14.11         | 271.64          | 1,629.83         |
| 200. Seal & paint closet shelving - single shelf               | 1.00 EA  | 86.63      | 0.54          | 17.42           | 104.59           |
| 201. R&R Patio door screen, 36" wide                           | 1.00 EA  | 102.16     | 8.33          | 22.08           | 132.57           |
| Material pricing should be verified.                           |          |            |               |                 |                  |
| 202. Lube/recondition sliding glass door                       | 1.00 EA  | 212.27     | 0.25          | 42.52           | 255.04           |
| 203. Lube/recondition operable window                          | 2.00 EA  | 162.52     | 0.31          | 65.06           | 390.41           |
| -----Fixtures-----                                             |          |            |               |                 |                  |
| 204. R&R Recessed light fixture - High grade                   | 7.00 EA  |            |               |                 | OPEN ITEM        |
| 205. TV Brackets - Wall or ceiling mounted - Detach & reset    | 1.00 EA  | 68.11      | 0.00          | 13.62           | 81.73            |
| <b>Totals: Office</b>                                          |          |            | <b>224.90</b> | <b>2,519.18</b> | <b>15,115.28</b> |

# State Farm

KALYVAS, JAMES

75-79F9-18M3



## Office Bathroom

Height: 8'

206.59 SF Walls  
246.10 SF Walls & Ceiling  
25.82 LF Ceil. Perimeter

39.50 SF Ceiling  
39.50 SF Floor  
25.82 LF Floor Perimeter

Door

2' 6" X 6' 8"

Opens into Exterior

Door

2' 7" X 6' 8"

Opens into OFFICE2

| DESCRIPTION                                                    | QUANTITY  | UNIT PRICE | TAX  | GCO&P | RCV        |
|----------------------------------------------------------------|-----------|------------|------|-------|------------|
| ----Ceiling----                                                |           |            |      |       |            |
| 206. Wallpaper - Premium grade                                 | 39.50 SF  | 4.17       | 6.64 | 34.26 | 205.62     |
| 207. Prep wall for wallpaper                                   | 39.50 SF  | 1.10       | 0.00 | 8.70  | 52.15      |
| 208. Texture drywall - smooth / skim coat                      | 39.50 SF  | 2.67       | 0.53 | 21.20 | 127.20     |
| 209. Seal the ceiling w/latex based stain blocker - one coat   | 39.50 SF  | 1.01       | 0.38 | 8.06  | 48.34      |
| ----Walls----                                                  |           |            |      |       |            |
| 210. Prep wall for wallpaper                                   | 206.59 SF |            |      |       | OPEN ITEM  |
| 211. Wallpaper - Premium grade                                 | 206.59 SF |            |      |       | OPEN ITEM  |
| -----Floor-----                                                |           |            |      |       |            |
| * 212. Travertine resurfacing - grind and re-seal              | 39.50 SF  |            |      |       | AS PER BID |
| * 213. Travertine floor - buff & polish                        | 39.50 SF  |            |      |       | AS PER BID |
| 214. RegROUT stone floor                                       | 39.50 SF  |            |      |       | AS PER BID |
| 215. Tile/stone sealer                                         | 39.50 SF  |            |      |       | AS PER BID |
| -----Doors and Windows-----                                    |           |            |      |       |            |
| 216. Prime & paint French door slab only - exterior (per side) | 2.00 EA   | 168.01     | 3.53 | 67.90 | 407.45     |

**State Farm**

KALYVAS, JAMES


75-79F9-18M3

**CONTINUED - Office Bathroom**

| DESCRIPTION                                                     | QUANTITY | UNIT PRICE | TAX  | GCO&P | RCV       |
|-----------------------------------------------------------------|----------|------------|------|-------|-----------|
| 217. Paint door/window trim & jamb - Large - 2 coats (per side) | 2.00 EA  | 60.62      | 1.37 | 24.52 | 147.13    |
| 218. Lube/recondition operable window                           | 1.00 EA  | 162.52     | 0.15 | 32.54 | 195.21    |
| 219. R&R Window screen, 1 - 9 SF                                | 1.00 EA  | 51.22      | 3.66 | 10.98 | 65.86     |
| 220. Detach & Reset Window drapery - hardware - Small           | 1.00 EA  | 51.34      | 0.00 | 10.26 | 61.60     |
| -----Plumbing-----                                              |          |            |      |       |           |
| 221. Toilet - Detach & reset                                    | 1.00 EA  | 305.16     | 0.87 | 61.22 | 367.25    |
| 222. Detach & Reset Sink faucet - Bathroom - High grade         | 1.00 EA  | 149.84     | 0.00 | 29.96 | 179.80    |
| 223. Gas/water line cap/plug - per cap                          | 1.00 EA  | 18.18      | 0.11 | 3.66  | 21.95     |
| 224. Detach & Reset P-trap assembly - ABS (plastic)             | 1.00 EA  | 73.87      | 0.00 | 14.78 | 88.65     |
| -----Lights-----                                                |          |            |      |       |           |
| 225. R&R Recessed light fixture - High grade                    | 2.00 EA  |            |      |       | OPEN ITEM |
| 226. R&R Light fixture - Premium grade                          | 1.00 EA  |            |      |       | OPEN ITEM |
| -----Cabinets-----                                              |          |            |      |       |           |
| 227. Vanity - Detach & reset                                    | 3.83 LF  | 81.35      | 0.00 | 62.32 | 373.89    |
| Vanity is installed on affected exterior wall.                  |          |            |      |       |           |
| 228. R&R Ceramic tile - bullnose - 3/4" x 6" - High grade       | 4.33 LF  | 19.07      | 1.88 | 16.90 | 101.35    |

CONTINUED - Office Bathroom

| DESCRIPTION                                                   | QUANTITY | UNIT PRICE | TAX          | GCO&P         | RCV             |
|---------------------------------------------------------------|----------|------------|--------------|---------------|-----------------|
| 229. R&R Vanity top - one sink - cultured marble - High grade | 3.83 LF  | 168.20     | 32.28        | 135.30        | 811.79          |
| 230. Stain & finish vanity - inside and out                   | 3.83 LF  | 93.02      | 3.48         | 71.96         | 431.71          |
| 231. Cabinet knobs or pulls - Detach & reset                  | 6.00 EA  | 3.57       | 0.00         | 4.28          | 25.70           |
| 232. Add-on for tile backsplash installation                  | 4.00 SF  | 27.70      | 0.00         | 22.16         | 132.96          |
| <b>Totals: Office Bathroom</b>                                |          |            | <b>54.88</b> | <b>640.96</b> | <b>3,845.61</b> |



Garage

Height: 8'

670.25 SF Walls  
1,190.76 SF Walls & Ceiling  
97.78 LF Ceil. Perimeter

520.51 SF Ceiling  
520.51 SF Floor  
81.78 LF Floor Perimeter

|      |               |                         |
|------|---------------|-------------------------|
| Door | 2' 7" X 6' 8" | Opens into GARAGE_HALL2 |
| Door | 8' X 7'       | Opens into Exterior     |
| Door | 8' X 7'       | Opens into Exterior     |

| DESCRIPTION                                              | QUANTITY  | UNIT PRICE | TAX   | GCO&P  | RCV      |
|----------------------------------------------------------|-----------|------------|-------|--------|----------|
| ----Ceiling----                                          |           |            |       |        |          |
| 233. Seal/prime (1 coat) then paint (1 coat) the ceiling | 520.51 SF | 1.53       | 10.88 | 161.46 | 968.72   |
| ----Walls----                                            |           |            |       |        |          |
| 234. Seal/prime (1 coat) then paint (1 coat) the walls   | 670.25 SF | 1.53       | 14.01 | 207.90 | 1,247.39 |
| -----Floor-----                                          |           |            |       |        |          |
| 235. Clean with pressure/chemical spray                  | 520.51 SF | 0.52       | 0.49  | 54.24  | 325.40   |

**State Farm**

KALYVAS, JAMES


75-79F9-18M3

**CONTINUED - Garage**

| DESCRIPTION                                                        | QUANTITY | UNIT PRICE | TAX    | GCO&P    | RCV       |
|--------------------------------------------------------------------|----------|------------|--------|----------|-----------|
| <b>-----Door/Windows-----</b>                                      |          |            |        |          |           |
| 236. Prime & paint door slab only - exterior (per side)            | 4.00 EA  |            |        |          | OPEN ITEM |
| 237. Paint door/window trim & jamb - Large - 2 coats (per side)    | 4.00 EA  | 60.62      | 2.74   | 49.04    | 294.26    |
| 238. Lube/recondition operable window                              | 1.00 EA  | 162.52     | 0.15   | 32.54    | 195.21    |
| 239. Overhead (garage) door opener - Detach & reset                | 2.00 EA  | 255.06     | 0.00   | 102.02   | 612.14    |
| <b>-----Plumbing-----</b>                                          |          |            |        |          |           |
| 240. R&R Water heater - 100 gal - CA approved                      | 1.00 EA  | 5,709.24   | 479.40 | 1,237.72 | 7,426.36  |
| 241. R&R Water heater seismic strap kit - 56 to 80 gallon          | 1.00 EA  | 91.93      | 2.56   | 18.90    | 113.39    |
| 242. Install Plumbing fixture supply line                          | 2.00 EA  | 16.97      | 0.00   | 6.78     | 40.72     |
| 243. Water line copper cap/plug - per cap                          | 2.00 EA  | 29.74      | 0.31   | 11.96    | 71.75     |
| 244. Gas/water line cap/plug - per cap                             | 1.00 EA  | 18.17      | 0.11   | 3.66     | 21.94     |
| 245. Install Flexible gas supply line connector - 1/2" - up to 24" | 1.00 EA  | 12.99      | 0.00   | 2.60     | 15.59     |
| <b>-----Fixtures-----</b>                                          |          |            |        |          |           |
| 246. R&R Light fixture - High grade                                | 3.00 EA  |            |        |          | OPEN ITEM |
| 247. R&R Central vacuum - cleaning system                          | 1.00 EA  |            |        |          | OPEN ITEM |
| <b>-----Cabinets-----</b>                                          |          |            |        |          |           |




| DESCRIPTION                                                        | QUANTITY | UNIT PRICE | TAX           | GCO&P           | RCV              |
|--------------------------------------------------------------------|----------|------------|---------------|-----------------|------------------|
| 248. R&R Garage cab. - upper (wall) units, 24" - High grade        | 3.50 EA  | 273.47     | 44.73         | 200.36          | 1,202.24         |
| 249. R&R Garage cabinetry - full height unit, 36"x18" - High grade | 4.00 EA  | 613.18     | 136.49        | 517.84          | 3,107.05         |
| <b>Totals: Garage</b>                                              |          |            | <b>691.87</b> | <b>2,607.02</b> | <b>15,642.16</b> |



**Height: 10'**

|                           |                          |
|---------------------------|--------------------------|
| 277.87 SF Walls           | 73.87 SF Ceiling         |
| 351.74 SF Walls & Ceiling | 53.74 SF Floor           |
| 37.69 LF Ceil. Perimeter  | 22.32 LF Floor Perimeter |

### Opens into Exterior



**Height: 8'**

|                           |                          |
|---------------------------|--------------------------|
| 297.46 SF Walls           | 46.15 SF Ceiling         |
| 343.61 SF Walls & Ceiling | 46.15 SF Floor           |
| 37.18 LF Ceil. Perimeter  | 37.18 LF Floor Perimeter |

**Opens into LAUNDRY\_ROOM**

Page: 33

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - Laundry Room**

| DESCRIPTION                                                     | QUANTITY  | UNIT PRICE | TAX   | GCO&P  | RCV       |
|-----------------------------------------------------------------|-----------|------------|-------|--------|-----------|
| 252. Seal/prime (1 coat) then paint (1 coat) the walls          | 575.32 SF | 1.53       | 12.02 | 178.44 | 1,070.70  |
| 253. Seal (1 coat) & paint (1 coat) baseboard                   | 59.50 LF  | 2.49       | 0.85  | 29.82  | 178.83    |
| <b>-----Floor-----</b>                                          |           |            |       |        |           |
| 254. Tile/stone sealer                                          | 199.79 SF | 1.53       | 7.02  | 62.54  | 375.24    |
| <b>-----Door/Windows-----</b>                                   |           |            |       |        |           |
| 255. R&R Window screen, 1 - 9 SF                                | 1.00 EA   | 51.16      | 3.66  | 10.96  | 65.78     |
| 256. Paint door/window trim & jamb - Large - 2 coats (per side) | 4.00 EA   | 60.62      | 2.74  | 49.04  | 294.26    |
| 257. Paint door slab only - 2 coats (per side)                  | 2.00 EA   | 60.55      | 1.92  | 24.60  | 147.62    |
| 258. Prime & paint French door slab only - exterior (per side)  | 2.00 EA   | 168.01     | 3.53  | 67.90  | 407.45    |
| 259. Lube/recondition operable window                           | 1.00 EA   | 162.52     | 0.15  | 32.54  | 195.21    |
| <b>-----Fixtures-----</b>                                       |           |            |       |        |           |
| 260. R&R Light fixture - High grade                             | 2.00 EA   |            |       |        | OPEN ITEM |
| 261. R&R Bathroom ventilation fan                               | 1.00 EA   |            |       |        | OPEN ITEM |
| 262. R&R Washer/Washing Machine - Front-loading - Premium grade | 1.00 EA   |            |       |        | EXCLUDED  |
| 263. R&R Dryer - Gas - Premium grade                            | 1.00 EA   |            |       |        | EXCLUDED  |
| <b>-----Cabinets-----</b>                                       |           |            |       |        |           |

# State Farm

KALYVAS, JAMES

75-79F9-18M3

## CONTINUED - Laundry Room

| DESCRIPTION                                          | QUANTITY | UNIT PRICE | TAX  | GCO&P  | RCV      |
|------------------------------------------------------|----------|------------|------|--------|----------|
| 264. Seal & paint cabinetry - lower - inside and out | 6.50 LF  | 76.27      | 4.54 | 100.06 | 600.36   |
| 265. Seal & paint cabinetry - upper - inside and out | 14.83 LF | 65.21      | 8.66 | 195.16 | 1,170.88 |
| 266. Seal grout on tile wall                         | 45.13 SF | 2.62       | 0.81 | 23.80  | 142.85   |
| 267. Cabinet knobs or pulls - Detach & reset         | 21.00 EA | 3.57       | 0.00 | 15.00  | 89.97    |

|                             |  |  |              |               |                 |
|-----------------------------|--|--|--------------|---------------|-----------------|
| <b>Totals: Laundry Room</b> |  |  | <b>49.03</b> | <b>832.74</b> | <b>4,996.46</b> |
|-----------------------------|--|--|--------------|---------------|-----------------|

Area Totals: First Floor

|                             |                                    |                                |
|-----------------------------|------------------------------------|--------------------------------|
| 8,585.09 SF Walls           | 3,491.39 SF Ceiling                | 12,076.48 SF Walls and Ceiling |
| 3,331.40 SF Floor           | 3,719.19 Total Area                | 713.93 LF Floor Perimeter      |
| 3,331.40 Floor Area         | 446.38 Exterior Perimeter of Walls | 928.56 LF Ceil. Perimeter      |
| 4,798.40 Exterior Wall Area |                                    | 8,313.91 Interior Wall Area    |


|                           |  |  |                 |                  |                   |
|---------------------------|--|--|-----------------|------------------|-------------------|
| <b>Total: First Floor</b> |  |  | <b>2,028.08</b> | <b>17,945.94</b> | <b>107,674.47</b> |
|---------------------------|--|--|-----------------|------------------|-------------------|

## Second Floor


### Second Floor

| DESCRIPTION                                      | QUANTITY    | UNIT PRICE | TAX  | GCO&P  | RCV      |
|--------------------------------------------------|-------------|------------|------|--------|----------|
| 268. Final cleaning - construction - Residential | 2,609.92 SF | 0.42       | 0.00 | 219.24 | 1,315.41 |

|                            |  |  |             |               |                 |
|----------------------------|--|--|-------------|---------------|-----------------|
| <b>Total: Second Floor</b> |  |  | <b>0.00</b> | <b>219.24</b> | <b>1,315.41</b> |
|----------------------------|--|--|-------------|---------------|-----------------|




|              |                      |                         |
|--------------|----------------------|-------------------------|
| Door         | 2' 6" X 6' 8"        | Opens into BEDROOM_1    |
| Missing Wall | 12' 6" X 8' 9"       | Opens into Exterior     |
| Door         | 5' 5" X 6' 8"        | Opens into BEDROOM_2    |
| Door         | 2' 8" X 6' 8"        | Opens into BEDROOM_3    |
| Missing Wall | 14' 7 15/16" X 8' 9" | Opens into Exterior     |
| Missing Wall | 13' 3 3/16" X 8' 9"  | Opens into Exterior     |
| Door         | 3' X 6' 8"           | Opens into MASTER_BEDR2 |



| Subroom: Landing Closet (1) |                          | Height: 8' 9" |
|-----------------------------|--------------------------|---------------|
| 169.17 SF Walls             | 22.19 SF Ceiling         |               |
| 191.35 SF Walls & Ceiling   | 22.19 SF Floor           |               |
| 19.33 LF Ceil. Perimeter    | 19.33 LF Floor Perimeter |               |

**Door** **2' 8" X 6' 8"** **Opens into LANDING2**



| Subroom: Hall Closet (2)  |                          | Height: 8' 9" |
|---------------------------|--------------------------|---------------|
| 191.21 SF Walls           | 24.39 SF Ceiling         |               |
| 215.60 SF Walls & Ceiling | 24.39 SF Floor           |               |
| 21.85 LF Ceil. Perimeter  | 21.85 LF Floor Perimeter |               |

**Door** **2' 6" X 6' 8"** **Opens into LANDING2**

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

----Ceiling----

|                                                          |           |      |      |        |        |
|----------------------------------------------------------|-----------|------|------|--------|--------|
| 269. Seal/prime (1 coat) then paint (1 coat) the ceiling | 354.77 SF | 1.53 | 7.41 | 110.04 | 660.25 |
|----------------------------------------------------------|-----------|------|------|--------|--------|

----Walls----

|                                               |           |      |      |       |        |
|-----------------------------------------------|-----------|------|------|-------|--------|
| 270. Seal (1 coat) & paint (1 coat) baseboard | 108.91 LF | 2.49 | 1.55 | 54.56 | 327.30 |
|-----------------------------------------------|-----------|------|------|-------|--------|

|                                                           |           |      |       |        |          |
|-----------------------------------------------------------|-----------|------|-------|--------|----------|
| 271. Seal/prime (1 coat) then<br>paint (1 coat) the walls | 964.23 SF | 1.53 | 20.15 | 299.10 | 1,794.52 |
|-----------------------------------------------------------|-----------|------|-------|--------|----------|

**State Farm**


KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - Landing**

| DESCRIPTION                                                                                  | QUANTITY  | UNIT PRICE | TAX           | GCO&P           | RCV              |
|----------------------------------------------------------------------------------------------|-----------|------------|---------------|-----------------|------------------|
| <b>-----Floor-----</b>                                                                       |           |            |               |                 |                  |
| 272. Carpet - Premium grade                                                                  | 407.99 SF | 7.91       | 265.50        | 698.54          | 4,191.24         |
| Material price should be verified.<br>Carpet had been removed at the time of the inspection. |           |            |               |                 |                  |
| 273. Carpet pad - Premium grade                                                              | 354.77 SF | 1.48       | 45.16         | 114.06          | 684.28           |
| <b>-----Door/Windows-----</b>                                                                |           |            |               |                 |                  |
| 274. Paint door/window trim & jamb - Large - 2 coats (per side)                              | 9.00 EA   | 60.62      | 6.16          | 110.36          | 662.10           |
| 275. R&R Window screen, 1 - 9 SF                                                             | 2.00 EA   | 51.16      | 7.32          | 21.92           | 131.56           |
| 276. Lube/recondition operable window                                                        | 2.00 EA   | 162.52     | 0.31          | 65.06           | 390.41           |
| 277. Prime & paint French door slab only - exterior (per side)                               | 4.00 EA   | 168.01     | 7.05          | 135.82          | 814.91           |
| 278. Paint door slab only - 2 coats (per side)                                               | 14.00 EA  | 60.55      | 13.46         | 172.24          | 1,033.40         |
| <b>-----Fixtures-----</b>                                                                    |           |            |               |                 |                  |
| 279. R&R Light fixture - wall sconce - High grade                                            | 3.00 EA   |            |               |                 | OPEN ITEM        |
| 280. R&R Recessed light fixture - High grade                                                 | 10.00 EA  |            |               |                 | OPEN ITEM        |
| <b>Totals: Landing</b>                                                                       |           |            | <b>374.07</b> | <b>1,781.70</b> | <b>10,689.97</b> |


**Bedroom 1**



**Bedroom 1** **Height: 8' 9"**

|                           |                          |
|---------------------------|--------------------------|
| 491.79 SF Walls           | 222.53 SF Ceiling        |
| 714.32 SF Walls & Ceiling | 222.53 SF Floor          |
| 60.78 LF Ceil. Perimeter  | 54.78 LF Floor Perimeter |

|        |               |                      |
|--------|---------------|----------------------|
| Door   | 2' 6" X 6' 8" | Opens into LANDING2  |
| Window | 5' X 4'       | Opens into Exterior  |
| Window | 5' X 4'       | Opens into Exterior  |
| Window | 5' X 4'       | Opens into Exterior  |
| Door   | 2' 8" X 6' 8" | Opens into BED1_BATH |



**Subroom: Bed1 Closet (1)** **Height: 8' 9"**

|                           |                          |
|---------------------------|--------------------------|
| 177.29 SF Walls           | 26.58 SF Ceiling         |
| 203.88 SF Walls & Ceiling | 26.58 SF Floor           |
| 24.83 LF Ceil. Perimeter  | 18.83 LF Floor Perimeter |

|      |            |                      |
|------|------------|----------------------|
| Door | 6' X 6' 8" | Opens into BEDROOM_1 |
|------|------------|----------------------|

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

----Ceiling----

|                                                          |           |      |      |       |        |
|----------------------------------------------------------|-----------|------|------|-------|--------|
| 281. Seal/prime (1 coat) then paint (1 coat) the ceiling | 249.11 SF | 1.53 | 5.21 | 77.26 | 463.61 |
| 282. Paint crown molding - two coats                     | 85.61 LF  | 2.50 | 1.55 | 43.12 | 258.70 |

----Walls----

|                                                            |           |      |        |        |          |
|------------------------------------------------------------|-----------|------|--------|--------|----------|
| 283. Seal (1 coat) & paint (1 coat) baseboard              | 73.61 LF  | 2.49 | 1.05   | 36.88  | 221.22   |
| 284. Prep wall for wallpaper                               | 669.08 SF | 1.10 | 0.00   | 147.20 | 883.19   |
| 285. Wallpaper - Premium grade                             | 669.08 SF | 4.17 | 112.51 | 580.52 | 3,483.09 |
| 286. Texture drywall - smooth / skim coat                  | 669.08 SF | 2.67 | 8.90   | 359.06 | 2,154.40 |
| 287. Seal the walls w/latex based stain blocker - one coat | 669.08 SF | 1.01 | 6.36   | 136.44 | 818.57   |

-----Floor-----

**State Farm**

KALYVAS, JAMES

75-79F9-18M3


**CONTINUED - Bedroom 1**

| DESCRIPTION                                                     | QUANTITY  | UNIT PRICE | TAX           | GCO&P           | RCV              |
|-----------------------------------------------------------------|-----------|------------|---------------|-----------------|------------------|
| 288. Carpet - Premium grade                                     | 286.48 SF | 7.91       | 186.43        | 490.50          | 2,942.99         |
| Material price should be verified.                              |           |            |               |                 |                  |
| 289. Carpet pad - Premium grade                                 | 249.11 SF | 1.48       | 31.71         | 80.08           | 480.47           |
| -----Door/Windows-----                                          |           |            |               |                 |                  |
| 290. Detach & Reset Window drapery - hardware                   | 6.00 EA   | 51.34      | 0.00          | 61.60           | 369.64           |
| 291. R&R Window screen, 10 - 16 SF                              | 4.00 EA   | 67.44      | 20.83         | 58.12           | 348.71           |
| 292. Paint door/window trim & jamb - Large - 2 coats (per side) | 7.00 EA   | 60.62      | 4.79          | 85.82           | 514.95           |
| 293. Lube/recondition operable window                           | 4.00 EA   | 162.52     | 0.62          | 130.14          | 780.84           |
| 294. Bifold door set - (4 slabs only) - Double Detach & reset   | 1.00 EA   | 47.60      | 0.00          | 9.52            | 57.12            |
| 295. Paint door slab only - 2 coats (per side)                  | 6.00 EA   | 60.55      | 5.77          | 73.82           | 442.89           |
| -----Fixtures-----                                              |           |            |               |                 |                  |
| 296. R&R Recessed light fixture - High grade                    | 5.00 EA   |            |               |                 | OPEN ITEM        |
| 297. Closet Organizer - Melamine or Wire - Detach & reset       | 9.75 LF   | 83.89      | 0.00          | 163.58          | 981.51           |
| Additional repairs may be required...                           |           |            |               |                 |                  |
| 298. Seal & paint cabinetry - lower - inside and out            | 16.25 LF  | 76.27      | 11.36         | 250.16          | 1,500.91         |
| <b>Totals: Bedroom 1</b>                                        |           |            | <b>397.09</b> | <b>2,783.82</b> | <b>16,702.81</b> |

# State Farm

KALYVAS, JAMES

75-79F9-18M3



## Bed1 Bath

Height: 8' 9"

351.46 SF Walls  
435.96 SF Walls & Ceiling  
40.17 LF Ceil. Perimeter

84.50 SF Ceiling  
66.75 SF Floor  
28.25 LF Floor Perimeter


| Door                                                               | 2' 8" X 6' 8" |            | Opens into BEDROOM_1 |        |           |
|--------------------------------------------------------------------|---------------|------------|----------------------|--------|-----------|
| DESCRIPTION                                                        | QUANTITY      | UNIT PRICE | TAX                  | GCO&P  | RCV       |
| ----Ceiling----                                                    |               |            |                      |        |           |
| 299. Prime & paint cold air return (cover)                         | 1.00 EA       | 27.67      | 0.62                 | 5.66   | 33.95     |
| 300. Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 435.96 SF     | 1.53       | 9.11                 | 135.22 | 811.35    |
| ----Walls----                                                      |               |            |                      |        |           |
| 301. Seal (1 coat) & paint (1 coat) baseboard                      | 28.25 LF      | 2.49       | 0.40                 | 14.14  | 84.88     |
| ----Floor-----                                                     |               |            |                      |        |           |
| 302. Grout sealer                                                  | 66.75 SF      | 2.41       | 1.20                 | 32.42  | 194.49    |
| ----Door/Windows-----                                              |               |            |                      |        |           |
| 303. R&R Window screen, 1 - 9 SF                                   | 1.00 EA       | 51.16      | 3.66                 | 10.96  | 65.78     |
| 304. Lube/recondition operable window                              | 1.00 EA       | 162.52     | 0.15                 | 32.54  | 195.21    |
| 305. Paint door/window trim & jamb - Large - 2 coats (per side)    | 1.00 EA       | 60.62      | 0.68                 | 12.26  | 73.56     |
| 306. Paint door slab only - 2 coats (per side)                     | 1.00 EA       | 60.55      | 0.96                 | 12.32  | 73.83     |
| ----Fixtures-----                                                  |               |            |                      |        |           |
| 307. R&R Recessed light fixture - High grade                       | 12.00 EA      |            |                      |        | OPEN ITEM |
| ----Shower-----                                                    |               |            |                      |        |           |
| 308. Seal grout on tile wall                                       | 98.85 SF      | 2.62       | 1.78                 | 52.16  | 312.93    |



| DESCRIPTION              | QUANTITY | UNIT PRICE        | TAX           | GCO&P                         | RCV              |
|--------------------------|----------|-------------------|---------------|-------------------------------|------------------|
| <b>Totals: Bed1 Bath</b> |          |                   | <b>18.56</b>  | <b>307.68</b>                 | <b>1,845.98</b>  |
| Area Totals: Bedroom 1   |          |                   |               |                               |                  |
| 1,020.54 SF Walls        |          | 333.61 SF Ceiling |               | 1,354.15 SF Walls and Ceiling |                  |
| 315.86 SF Floor          |          |                   |               | 101.86 LF Floor Perimeter     |                  |
|                          |          |                   |               | 125.78 LF Ceil. Perimeter     |                  |
| <b>Total: Bedroom 1</b>  |          |                   | <b>415.65</b> | <b>3,091.50</b>               | <b>18,548.79</b> |

[illegible]

**Opens into LANDING2**



**Opens into BED2\_BATH**

Page: 41

**State Farm**

KALYVAS, JAMES

75-79F9-18M3


**CONTINUED - Bedroom 2**

| DESCRIPTION                                                     | QUANTITY  | UNIT PRICE | TAX           | GCO&P           | RCV             |
|-----------------------------------------------------------------|-----------|------------|---------------|-----------------|-----------------|
| <b>----Walls----</b>                                            |           |            |               |                 |                 |
| 311. Seal (1 coat) & paint (1 coat) baseboard                   | 72.53 LF  | 2.49       | 1.03          | 36.32           | 217.95          |
| 312. Seal/prime (1 coat) then paint (1 coat) the walls          | 599.71 SF | 1.53       | 12.53         | 186.02          | 1,116.11        |
| <b>-----Floor-----</b>                                          |           |            |               |                 |                 |
| 313. Carpet - Premium grade                                     | 278.89 SF | 7.91       | 181.49        | 477.50          | 2,865.01        |
| 314. Carpet pad - Premium grade                                 | 242.51 SF | 1.48       | 30.87         | 77.96           | 467.74          |
| <b>-----Door/Windows-----</b>                                   |           |            |               |                 |                 |
| 315. Detach & Reset Window drapery - hardware                   | 2.00 EA   | 51.34      | 0.00          | 20.54           | 123.22          |
| 316. R&R Window screen, 10 - 16 SF                              | 2.00 EA   | 67.44      | 10.42         | 29.04           | 174.34          |
| 317. Paint door/window trim & jamb - Large - 2 coats (per side) | 1.00 EA   | 60.62      | 0.68          | 12.26           | 73.56           |
| 318. Paint door/window trim & jamb - 2 coats (per side)         | 5.00 EA   | 51.53      | 2.91          | 52.12           | 312.68          |
| 319. Lube/recondition operable window                           | 4.00 EA   | 162.52     | 0.62          | 130.14          | 780.84          |
| 320. Paint door slab only - 2 coats (per side)                  | 6.00 EA   | 60.55      | 5.77          | 73.82           | 442.89          |
| <b>-----Fixtures-----</b>                                       |           |            |               |                 |                 |
| 321. R&R Recessed light fixture - High grade                    | 4.00 EA   |            |               |                 | OPEN ITEM       |
| 322. Closet Organizer - Melamine or Wire - Detach & reset       | 7.67 LF   | 83.89      | 0.00          | 128.68          | 772.12          |
| <b>Totals: Bedroom 2</b>                                        |           |            | <b>252.85</b> | <b>1,340.22</b> | <b>8,041.38</b> |

# State Farm

KALYVAS, JAMES

75-79F9-18M3



## Bed2 Bath

Height: 8' 9"

307.69 SF Walls  
381.12 SF Walls & Ceiling  
37.82 LF Ceil. Perimeter

73.42 SF Ceiling  
56.17 SF Floor  
29.16 LF Floor Perimeter

**Door** 2' 8" X 6' 8" **Opens into BEDROOM\_2**  
**Window** 2' 9" X 2' **Opens into Exterior**  
**Door** 2' 8" X 6' 8" **Opens into BED2\_CLOSET**

| DESCRIPTION                                                        | QUANTITY  | UNIT PRICE | TAX  | GCO&P  | RCV       |
|--------------------------------------------------------------------|-----------|------------|------|--------|-----------|
| ----Ceiling----                                                    |           |            |      |        |           |
| 323. Prime & paint cold air return (cover)                         | 1.00 EA   | 27.67      | 0.62 | 5.66   | 33.95     |
| 324. Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 381.12 SF | 1.53       | 7.97 | 118.22 | 709.30    |
| ----Walls----                                                      |           |            |      |        |           |
| 325. Seal (1 coat) & paint (1 coat) baseboard                      | 29.16 LF  | 2.49       | 0.42 | 14.60  | 87.63     |
| ----Floor----                                                      |           |            |      |        |           |
| 326. Grout sealer                                                  | 56.17 SF  | 2.41       | 1.01 | 27.28  | 163.66    |
| -----Door/Windows-----                                             |           |            |      |        |           |
| 327. R&R Window screen, 1 - 9 SF                                   | 1.00 EA   | 51.16      | 3.66 | 10.96  | 65.78     |
| 328. Lube/recondition operable window                              | 1.00 EA   | 162.52     | 0.15 | 32.54  | 195.21    |
| 329. Paint door/window trim & jamb - 2 coats (per side)            | 2.00 EA   | 51.53      | 1.16 | 20.86  | 125.08    |
| 330. Paint door slab only - 2 coats (per side)                     | 1.00 EA   | 60.55      | 0.96 | 12.32  | 73.83     |
| 331. R&R Recessed light fixture - High grade                       | 3.00 EA   |            |      |        | OPEN ITEM |
| -----Shower-----                                                   |           |            |      |        |           |
| 332. Seal grout on tile wall                                       | 98.85 SF  | 2.62       | 1.78 | 52.16  | 312.93    |

## CONTINUED - Bed2 Bath

| DESCRIPTION              | QUANTITY | UNIT PRICE        | TAX           | GCO&P                         | RCV             |
|--------------------------|----------|-------------------|---------------|-------------------------------|-----------------|
| <b>Totals: Bed2 Bath</b> |          |                   | <b>17.73</b>  | <b>294.60</b>                 | <b>1,767.37</b> |
| Area Totals: Bedroom 2   |          |                   |               |                               |                 |
| 907.40 SF Walls          |          | 315.94 SF Ceiling |               | 1,223.34 SF Walls and Ceiling |                 |
| 298.69 SF Floor          |          |                   |               | 101.69 LF Floor Perimeter     |                 |
|                          |          |                   |               | 118.44 LF Ceil. Perimeter     |                 |
| <b>Total: Bedroom 2</b>  |          |                   | <b>270.58</b> | <b>1,634.82</b>               | <b>9,808.75</b> |

## Bedroom 3



Door


2' 8" X 6' 8"

Opens into BED3\_BATH

Door

2' 8" X 6' 8"

Opens into LANDING2



Door

2' 8" X 6' 8"

Opens into BEDROOM\_3

## Bedroom 3

Height: 8' 9"

532.87 SF Walls  
 752.08 SF Walls & Ceiling  
 60.90 LF Ceil. Perimeter

219.21 SF Ceiling  
 219.21 SF Floor  
 60.90 LF Floor Perimeter

## Subroom: Bed3 Closet (1)

Height: 8' 9"

185.78 SF Walls  
 213.90 SF Walls & Ceiling  
 21.23 LF Ceil. Perimeter

28.13 SF Ceiling  
 28.13 SF Floor  
 21.23 LF Floor Perimeter

| DESCRIPTION                                              | QUANTITY  | UNIT PRICE | TAX  | GCO&P | RCV    |
|----------------------------------------------------------|-----------|------------|------|-------|--------|
| ----Ceiling----                                          |           |            |      |       |        |
| 333. Seal/prime (1 coat) then paint (1 coat) the ceiling | 247.33 SF | 1.53       | 5.17 | 76.72 | 460.30 |
| 334. Paint crown molding - two coats                     | 82.13 LF  | 2.50       | 1.48 | 41.36 | 248.17 |

----Walls----

**State Farm**

KALYVAS, JAMES

75-79F9-18M3


**CONTINUED - Bedroom 3**

| DESCRIPTION                                                 | QUANTITY  | UNIT PRICE | TAX           | GCO&P           | RCV             |
|-------------------------------------------------------------|-----------|------------|---------------|-----------------|-----------------|
| 335. Seal (1 coat) & paint (1 coat) baseboard               | 82.13 LF  | 2.49       | 1.17          | 41.14           | 246.81          |
| 336. Seal/prime (1 coat) then paint (1 coat) the walls      | 718.65 SF | 1.53       | 15.02         | 222.90          | 1,337.45        |
| <b>-----Floor-----</b>                                      |           |            |               |                 |                 |
| <b>Any issues with material deterioration are excluded.</b> |           |            |               |                 |                 |
| 337. Carpet - Premium grade                                 | 284.43 SF | 7.91       | 185.09        | 486.98          | 2,921.91        |
| Material price should be verified                           |           |            |               |                 |                 |
| 338. Carpet pad - Premium grade                             | 247.33 SF | 1.48       | 31.48         | 79.52           | 477.05          |
| <b>-----Door/Windows-----</b>                               |           |            |               |                 |                 |
| 339. Detach & Reset Window drapery - hardware               | 2.00 EA   | 51.34      | 0.00          | 20.54           | 123.22          |
| 340. Paint door/window trim & jamb - 2 coats (per side)     | 5.00 EA   | 51.53      | 2.91          | 52.12           | 312.68          |
| 341. R&R Window screen, 1 - 9 SF                            | 1.00 EA   | 51.16      | 3.66          | 10.96           | 65.78           |
| 342. Lube/recondition operable window                       | 1.00 EA   | 162.52     | 0.15          | 32.54           | 195.21          |
| 343. Lube/recondition sliding glass door                    | 1.00 EA   | 212.27     | 0.25          | 42.52           | 255.04          |
| 344. Paint door slab only - 2 coats (per side)              | 5.00 EA   | 60.55      | 4.81          | 61.52           | 369.08          |
| <b>-----Fixtures-----</b>                                   |           |            |               |                 |                 |
| 345. R&R Recessed light fixture - High grade                | 5.00 EA   |            |               |                 | OPEN ITEM       |
| 346. Closet shelf and rod package - Detach & reset          | 5.67 LF   | 15.21      | 0.00          | 17.24           | 103.48          |
| <b>Totals: Bedroom 3</b>                                    |           |            | <b>251.19</b> | <b>1,186.06</b> | <b>7,116.18</b> |

# State Farm

KALYVAS, JAMES

75-79F9-18M3



## Bed3 Bath

Height: 8' 9"

297.90 SF Walls  
361.44 SF Walls & Ceiling  
34.05 LF Ceil. Perimeter

63.54 SF Ceiling  
63.54 SF Floor  
34.05 LF Floor Perimeter

## Door

2' 8" X 6' 8"

Opens into BEDROOM\_3

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

## ----Ceiling----

|                                                                    |           |       |      |        |        |
|--------------------------------------------------------------------|-----------|-------|------|--------|--------|
| 347. Prime & paint cold air return (cover)                         | 1.00 EA   | 27.67 | 0.62 | 5.66   | 33.95  |
| 348. Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 361.44 SF | 1.53  | 7.55 | 112.12 | 672.67 |

## ----Walls----

|                                               |          |      |      |       |        |
|-----------------------------------------------|----------|------|------|-------|--------|
| 349. Seal (1 coat) & paint (1 coat) baseboard | 34.05 LF | 2.49 | 0.49 | 17.06 | 102.33 |
|-----------------------------------------------|----------|------|------|-------|--------|

## ----Floor-----

|                   |          |      |      |       |        |
|-------------------|----------|------|------|-------|--------|
| 350. Grout sealer | 63.54 SF | 2.41 | 1.15 | 30.86 | 185.14 |
|-------------------|----------|------|------|-------|--------|

## -----Door/Windows-----

|                                                                 |         |        |      |       |        |
|-----------------------------------------------------------------|---------|--------|------|-------|--------|
| 351. R&R Window screen, 1 - 9 SF                                | 1.00 EA | 51.16  | 3.66 | 10.96 | 65.78  |
| 352. Lube/recondition operable window                           | 1.00 EA | 162.52 | 0.15 | 32.54 | 195.21 |
| 353. Paint door/window trim & jamb - Large - 2 coats (per side) | 2.00 EA | 60.62  | 1.37 | 24.52 | 147.13 |
| 354. Paint door slab only - 2 coats (per side)                  | 1.00 EA | 60.55  | 0.96 | 12.32 | 73.83  |

## -----Fixtures-----

|                                              |         |  |  |  |           |
|----------------------------------------------|---------|--|--|--|-----------|
| 355. R&R Recessed light fixture - High grade | 3.00 EA |  |  |  | OPEN ITEM |
|----------------------------------------------|---------|--|--|--|-----------|

remove and replace light fixtures due to etching and electrical damages from smoke based corrosion.

## -----Shower-----

|                              |          |      |      |       |        |
|------------------------------|----------|------|------|-------|--------|
| 356. Seal grout on tile wall | 98.85 SF | 2.62 | 1.78 | 52.16 | 312.93 |
|------------------------------|----------|------|------|-------|--------|

# State Farm

KALYVAS, JAMES

75-79F9-18M3

## CONTINUED - Bed3 Bath

| DESCRIPTION              | QUANTITY | UNIT PRICE        | TAX           | GCO&P                         | RCV             |
|--------------------------|----------|-------------------|---------------|-------------------------------|-----------------|
| <b>Totals: Bed3 Bath</b> |          |                   | <b>17.73</b>  | <b>298.20</b>                 | <b>1,788.97</b> |
| Area Totals: Bedroom 3   |          |                   |               |                               |                 |
| 1,016.54 SF Walls        |          | 310.88 SF Ceiling |               | 1,327.42 SF Walls and Ceiling |                 |
| 310.88 SF Floor          |          |                   |               | 116.18 LF Floor Perimeter     |                 |
|                          |          |                   |               | 116.18 LF Ceil. Perimeter     |                 |
| <b>Total: Bedroom 3</b>  |          |                   | <b>268.92</b> | <b>1,484.26</b>               | <b>8,905.15</b> |

## Master Suite



### Master Bedroom

Height: 8' 9"

|                             |                          |
|-----------------------------|--------------------------|
| 712.81 SF Walls             | 394.79 SF Ceiling        |
| 1,107.60 SF Walls & Ceiling | 394.79 SF Floor          |
| 81.46 LF Ceil. Perimeter    | 81.46 LF Floor Perimeter |

|               |                    |                               |
|---------------|--------------------|-------------------------------|
| <b>Door</b>   | <b>3' X 6' 8"</b>  | <b>Opens into MASTER_BATH</b> |
| <b>Door</b>   | <b>3' X 6' 8"</b>  | <b>Opens into LANDING2</b>    |
| <b>Window</b> | <b>4' 6" X 4'</b>  | <b>Opens into Exterior</b>    |
| <b>Window</b> | <b>3' 3" X 4'</b>  | <b>Opens into Exterior</b>    |
| <b>Window</b> | <b>3' 10" X 4'</b> | <b>Opens into Exterior</b>    |
| <b>Window</b> | <b>3' 4" X 4'</b>  | <b>Opens into Exterior</b>    |

| DESCRIPTION                                              | QUANTITY  | UNIT PRICE | TAX  | GCO&P  | RCV    |
|----------------------------------------------------------|-----------|------------|------|--------|--------|
| <b>---Ceiling---</b>                                     |           |            |      |        |        |
| 357. Stain & finish wood beam                            | 44.79 SF  | 4.30       | 2.60 | 39.04  | 234.24 |
| 358. Seal/prime (1 coat) then paint (1 coat) the ceiling | 394.79 SF | 1.53       | 8.25 | 122.46 | 734.74 |
| <b>---Walls---</b>                                       |           |            |      |        |        |
| 359. Seal (1 coat) & paint (1 coat) baseboard            | 81.46 LF  | 2.49       | 1.16 | 40.80  | 244.80 |
| 360. Prep wall for wallpaper                             | 712.81 SF | 1.10       | 0.00 | 156.82 | 940.91 |

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - Master Bedroom**

| DESCRIPTION                                                     | QUANTITY  | UNIT PRICE | TAX    | GCO&P  | RCV       |
|-----------------------------------------------------------------|-----------|------------|--------|--------|-----------|
| 361. Wallpaper - Premium grade                                  | 712.81 SF | 4.17       | 119.86 | 618.46 | 3,710.74  |
| 362. Texture drywall - smooth / skim coat                       | 712.81 SF | 2.67       | 9.48   | 382.54 | 2,295.22  |
| 363. Seal the walls w/latex based stain blocker - one coat      | 712.81 SF | 1.01       | 6.77   | 145.34 | 872.05    |
| <b>-----Floor-----</b>                                          |           |            |        |        |           |
| 364. Carpet - Premium grade                                     | 454.00 SF | 7.91       | 295.44 | 777.30 | 4,663.88  |
| 365. Carpet pad - Premium grade                                 | 394.79 SF | 1.48       | 50.26  | 126.92 | 761.47    |
| <b>-----Door/Windows-----</b>                                   |           |            |        |        |           |
| 366. Detach & Reset Window drapery - hardware                   | 12.00 EA  | 51.34      | 0.00   | 123.22 | 739.30    |
| 367. Paint door/window trim & jamb - Large - 2 coats (per side) | 9.00 EA   | 60.62      | 6.16   | 110.36 | 662.10    |
| 368. R&R Window screen, 10 - 16 SF                              | 5.00 EA   | 67.44      | 26.04  | 72.64  | 435.88    |
| 369. Lube/recondition operable window                           | 5.00 EA   | 162.52     | 0.77   | 162.68 | 976.05    |
| 370. Interior door - Detach & reset                             | 2.00 EA   | 114.34     | 0.19   | 45.78  | 274.65    |
| 371. Paint door slab only - 2 coats (per side)                  | 4.00 EA   | 60.55      | 3.85   | 49.22  | 295.27    |
| 372. Prime & paint French door slab only - exterior (per side)  | 3.00 EA   | 168.01     | 5.29   | 101.86 | 611.18    |
| <b>-----Fixtures-----</b>                                       |           |            |        |        |           |
| 373. R&R Recessed light fixture - High grade                    | 6.00 EA   |            |        |        | OPEN ITEM |





**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - Master Bath**

| DESCRIPTION                                                                                                                                            | QUANTITY  | UNIT PRICE | TAX    | GCO&P  | RCV       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|--------|--------|-----------|
| 377. Stain & finish crown molding                                                                                                                      | 122.97 LF | 2.78       | 3.15   | 69.02  | 414.03    |
| 378. Seal the surface area w/latex based stain blocker - one coat                                                                                      | 120.00 SF | 1.00       | 1.14   | 24.22  | 145.36    |
| <b>----Walls----</b>                                                                                                                                   |           |            |        |        |           |
| 379. Seal (1 coat) & paint (1 coat) baseboard                                                                                                          | 91.15 LF  | 2.49       | 1.30   | 45.66  | 273.92    |
| 380. Prep wall for wallpaper                                                                                                                           | 670.89 SF | 1.10       | 0.00   | 147.60 | 885.58    |
| 381. Wallpaper - Premium grade                                                                                                                         | 670.89 SF | 4.17       | 112.81 | 582.08 | 3,492.50  |
| 382. Texture drywall - smooth / skim coat                                                                                                              | 670.89 SF | 2.67       | 8.92   | 360.04 | 2,160.24  |
| 383. Seal part of the walls w/latex based stain blocker - one coat                                                                                     | 670.89 SF | 1.01       | 6.37   | 136.80 | 820.77    |
| <b>-----Floor-----</b>                                                                                                                                 |           |            |        |        |           |
| 384. Carpet - Premium grade                                                                                                                            | 97.95 SF  | 7.91       | 63.74  | 167.70 | 1,006.22  |
| 15 % waste added for Carpet - Premium grade.                                                                                                           |           |            |        |        |           |
| 385. R&R Travertine tile - Premium grade                                                                                                               | 264.13 SF |            |        |        | OPEN ITEM |
| All attempts should be made to repair the mosaic tiles that were reported to have been removed during mitigation. Unknown as to why they were removed. |           |            |        |        |           |
| 386. Tile / Cultured Marble Installer - per hour                                                                                                       | 8.00 HR   | 170.25     | 0.00   | 272.40 | 1,634.40  |
| * 387. Add-on for detail tile installation                                                                                                             | 264.13 SF |            |        |        | OPEN ITEM |
| 388. Tile/stone sealer                                                                                                                                 | 528.25 SF | 1.53       | 18.57  | 165.36 | 992.15    |
| <b>-----Door/Windows-----</b>                                                                                                                          |           |            |        |        |           |
| 389. Detach & Reset Window drapery - hardware                                                                                                          | 6.00 EA   | 51.34      | 0.00   | 61.60  | 369.64    |

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - Master Bath**

| DESCRIPTION                                                                                           | QUANTITY | UNIT PRICE | TAX   | GCO&P  | RCV       |
|-------------------------------------------------------------------------------------------------------|----------|------------|-------|--------|-----------|
| 390. Paint door/window trim & jamb - Large - 2 coats (per side)                                       | 9.00 EA  | 60.62      | 6.16  | 110.36 | 662.10    |
| 391. R&R Window screen, 10 - 16 SF                                                                    | 4.00 EA  | 67.44      | 20.83 | 58.12  | 348.71    |
| 392. Lube/recondition operable window                                                                 | 5.00 EA  | 162.52     | 0.77  | 162.68 | 976.05    |
| 393. Interior door - Detach & reset                                                                   | 1.00 EA  | 114.34     | 0.10  | 22.88  | 137.32    |
| 394. Paint door slab only - 2 coats (per side)                                                        | 2.00 EA  | 60.55      | 1.92  | 24.60  | 147.62    |
| -----Fixtures-----                                                                                    |          |            |       |        |           |
| 395. R&R Recessed light fixture - High grade                                                          | 10.00 EA |            |       |        | OPEN ITEM |
| 396. Detach & Reset Light fixture - wall sconce - High grade                                          | 2.00 EA  | 76.26      | 0.00  | 30.50  | 183.02    |
| These are 1950/70 Pair of Maison Baguès Daisy Sconces H 57 cm With Blue Glass Beads \$7,779.55per set |          |            |       |        |           |
| 397. In-wall / In-ceiling speaker - Detach & reset                                                    | 2.00 EA  | 27.64      | 0.00  | 11.06  | 66.34     |
| -----Fireplace-----                                                                                   |          |            |       |        |           |
| 398. Seal grout on tile wall                                                                          | 36.40 SF | 2.62       | 0.66  | 19.22  | 115.25    |
| -----Plumbing-----                                                                                    |          |            |       |        |           |
| 399. Gas/water line cap/plug - per cap                                                                | 1.00 EA  | 18.18      | 0.11  | 3.66   | 21.95     |
| -----Cabinets-----                                                                                    |          |            |       |        |           |
| 400. Stain & finish full height cabinetry - inside and out                                            | 1.67 LF  | 144.44     | 2.55  | 48.76  | 292.52    |

**State Farm**

KALYVAS, JAMES


75-79F9-18M3

**CONTINUED - Master Bath**

| DESCRIPTION                                                     | QUANTITY  | UNIT PRICE | TAX  | GCO&P | RCV       |
|-----------------------------------------------------------------|-----------|------------|------|-------|-----------|
| 401. Vanity - Detach & reset                                    | 5.17 LF   | 81.35      | 0.00 | 84.12 | 504.70    |
| 402. Stain & finish vanity - inside and out                     | 5.17 LF   | 93.02      | 4.70 | 97.12 | 582.73    |
| 403. Cabinet knobs or pulls - Detach & reset                    | 17.00 EA  | 3.57       | 0.00 | 12.14 | 72.83     |
| 404. R&R Ceramic tile - bullnose - 3/4" x 6" - High grade       | 4.33 LF   | 19.07      | 1.88 | 16.90 | 101.35    |
| 405. R&R Ceramic/porcelain tile - Premium grade                 | 2.00 SF   | 33.28      | 2.65 | 13.84 | 83.05     |
| -----Shower-----                                                |           |            |      |       |           |
| 406. R&R Tile shower - 101 to 120 SF - High grade               | 1.00 EA   |            |      |       | OPEN ITEM |
| 407. R&R Mortar bed for tile                                    | 109.44 SF |            |      |       | OPEN ITEM |
| 408. Detach & Reset Tub/shower faucet - Premium grade           | 2.00 EA   |            |      |       | OPEN ITEM |
| 409. Seal grout on tile wall                                    | 109.44 SF | 2.62       | 1.98 | 57.74 | 346.45    |
| 410. Custom shower door & partition - frameless- Detach & reset | 70.00 SF  |            |      |       | OPEN ITEM |
| ----Infrared Sauna-----                                         |           |            |      |       |           |
| 411. R&R Sauna - interior - 4' x 6'                             | 1.00 EA   |            |      |       | EXCLUDED  |

The unit was not present at the time of the inspection - it had been removed. This item is excluded from this estimate.

|                            |               |                 |                  |
|----------------------------|---------------|-----------------|------------------|
| <b>Totals: Master Bath</b> | <b>260.31</b> | <b>2,806.18</b> | <b>16,836.80</b> |
|----------------------------|---------------|-----------------|------------------|



Master Closet

Height: 8' 9"

551.15 SF Walls  
703.30 SF Walls & Ceiling  
67.12 LF Ceil. Perimeter

152.15 SF Ceiling  
152.15 SF Floor  
61.70 LF Floor Perimeter

Door


5' 5" X 6' 8"

Opens into MASTER\_BATH

| DESCRIPTION                                                     | QUANTITY  | UNIT PRICE | TAX    | GCO&P  | RCV       |
|-----------------------------------------------------------------|-----------|------------|--------|--------|-----------|
| ----Ceiling----                                                 |           |            |        |        |           |
| 412. Seal/prime (1 coat) then paint (1 coat) the ceiling        | 152.15 SF | 1.53       | 3.18   | 47.20  | 283.17    |
| ----Walls----                                                   |           |            |        |        |           |
| 413. R&R Baseboard - 4 1/4"                                     | 15.43 LF  |            |        |        | OPEN ITEM |
| 414. 5/8" drywall - hung, taped, ready for texture              | 137.79 SF |            |        |        | OPEN ITEM |
| 415. Tape joint for new to existing drywall - per LF            | 33.12 LF  |            |        |        | OPEN ITEM |
| 416. Paint baseboard - two coats                                | 61.70 LF  | 2.40       | 1.00   | 29.82  | 178.90    |
| 417. Seal/prime (1 coat) then paint (1 coat) the walls          | 551.15 SF | 1.53       | 11.52  | 170.96 | 1,025.74  |
| ----Floor----                                                   |           |            |        |        |           |
| 418. Carpet - Premium grade                                     | 174.97 SF | 7.91       | 113.86 | 299.58 | 1,797.45  |
| Material price should be verified.                              |           |            |        |        |           |
| 419. Carpet pad - Premium grade                                 | 152.15 SF | 1.48       | 19.37  | 48.92  | 293.47    |
| ----Door/Windows----                                            |           |            |        |        |           |
| 420. Paint door/window trim & jamb - Large - 2 coats (per side) | 1.00 EA   | 60.62      | 0.68   | 12.26  | 73.56     |
| ----Fixtures----                                                |           |            |        |        |           |
| 421. R&R Recessed light fixture - High grade                    | 9.00 EA   |            |        |        | OPEN ITEM |

| DESCRIPTION                                        | QUANTITY | UNIT PRICE        | TAX           | GCO&P                         | RCV              |
|----------------------------------------------------|----------|-------------------|---------------|-------------------------------|------------------|
| 422. Closet shelf and rod package - Detach & reset | 43.00 LF | 15.21             | 0.00          | 130.80                        | 784.83           |
| <b>Totals: Master Closet</b>                       |          |                   | <b>149.61</b> | <b>739.54</b>                 | <b>4,437.12</b>  |
| Area Totals: Master Suite                          |          |                   |               |                               |                  |
| 2,158.48 SF Walls                                  |          | 969.68 SF Ceiling |               | 3,128.16 SF Walls and Ceiling |                  |
| 896.23 SF Floor                                    |          |                   |               | 234.32 LF Floor Perimeter     |                  |
|                                                    |          |                   |               | 271.55 LF Ceil. Perimeter     |                  |
| <b>Total: Master Suite</b>                         |          |                   | <b>949.10</b> | <b>6,654.12</b>               | <b>39,924.10</b> |

**Opens into Exterior**  
**Opens into Exterior**



Opens into GUEST\_BEDROOM

Opens into STAIRWELL

Page: 54

**State Farm**

KALYVAS, JAMES

75-79F9-18M3


**CONTINUED - Stairwell**

| DESCRIPTION                                                       | QUANTITY  | UNIT PRICE | TAX          | GCO&P         | RCV             |
|-------------------------------------------------------------------|-----------|------------|--------------|---------------|-----------------|
| 424. Seal/prime (1 coat) then paint (1 coat) the ceiling          | 132.81 SF | 1.53       | 2.78         | 41.20         | 247.18          |
| 425. 1/2" drywall - hung, taped, ready for texture                | 132.81 SF | 3.73       | 8.33         | 100.74        | 604.45          |
| Drywall was removed for mitigation                                |           |            |              |               |                 |
| 426. Texture drywall - smooth / skim coat                         | 132.81 SF | 2.67       | 1.77         | 71.28         | 427.65          |
| 427. Batt insulation - 12" - R38 - unfaced batt                   | 132.81 SF | 2.56       | 21.20        | 72.24         | 433.43          |
| <b>----Walls----</b>                                              |           |            |              |               |                 |
| 428. Seal (1 coat) & paint (1 coat) baseboard                     | 52.83 LF  | 2.49       | 0.75         | 26.48         | 158.78          |
| 429. Seal/prime (1 coat) then paint (1 coat) the walls            | 439.55 SF | 1.53       | 9.19         | 136.34        | 818.04          |
| <b>-----Door/Windows-----</b>                                     |           |            |              |               |                 |
| 430. Paint door/window trim & jamb - Large - 2 coats (per side)   | 1.00 EA   | 60.62      | 0.68         | 12.26         | 73.56           |
| <b>-----Fixtures-----</b>                                         |           |            |              |               |                 |
| 431. R&R Recessed light fixture - High grade                      | 3.00 EA   |            |              |               | OPEN ITEM       |
| <b>-----Stairs-----</b>                                           |           |            |              |               |                 |
| 432. R&R Stair nosing - for wood flooring                         | 52.83 LF  |            |              |               | OPEN ITEM       |
| 433. R&R Engineered wood flooring - step charge (tread and riser) | 57.00 LF  |            |              |               | OPEN ITEM       |
| <b>Totals: Stairwell</b>                                          |           |            | <b>45.32</b> | <b>466.20</b> | <b>2,797.04</b> |

# State Farm

KALYVAS, JAMES

75-79F9-18M3



## Guest Bedroom

Height: 8' 9"

|                           |                          |
|---------------------------|--------------------------|
| 527.29 SF Walls           | 221.92 SF Ceiling        |
| 749.21 SF Walls & Ceiling | 221.92 SF Floor          |
| 60.26 LF Ceil. Perimeter  | 60.26 LF Floor Perimeter |

Window

2' 6" X 3' 6"

Opens into Exterior

Door


2' 6" X 6' 8"

Opens into LANDING

Door

2' 6" X 6' 8"

Opens into GUEST\_BATHRO



## Subroom: Guest Closet (1)

Height: 8' 9"

|                           |                          |
|---------------------------|--------------------------|
| 186.35 SF Walls           | 28.28 SF Ceiling         |
| 214.63 SF Walls & Ceiling | 28.28 SF Floor           |
| 21.30 LF Ceil. Perimeter  | 21.30 LF Floor Perimeter |

Door

2' 6" X 6' 8"


Opens into GUEST\_BEDROO

| DESCRIPTION                                              | QUANTITY  | UNIT PRICE | TAX    | GCO&P  | RCV      |
|----------------------------------------------------------|-----------|------------|--------|--------|----------|
| ---Ceiling---                                            |           |            |        |        |          |
| 434. Seal/prime (1 coat) then paint (1 coat) the ceiling | 250.20 SF | 1.53       | 5.23   | 77.60  | 465.64   |
| ---Walls---                                              |           |            |        |        |          |
| 435. Seal (1 coat) & paint (1 coat) baseboard            | 81.56 LF  | 2.49       | 1.16   | 40.86  | 245.10   |
| 436. Seal/prime (1 coat) then paint (2 coats) the walls  | 713.64 SF | 2.09 *     | 24.41  | 303.18 | 1,819.10 |
| ----Floor----                                            |           |            |        |        |          |
| 437. Carpet - Premium grade                              | 287.73 SF | 7.91       | 187.24 | 492.62 | 2,955.80 |
| Material pricing should be verified .                    |           |            |        |        |          |
| 438. Carpet pad - Premium grade                          | 250.20 SF | 1.48       | 31.85  | 80.44  | 482.59   |
| -----Door/Windows-----                                   |           |            |        |        |          |
| 439. Paint door/window trim & jamb - 2 coats (per side)  | 5.00 EA   | 51.53      | 2.91   | 52.12  | 312.68   |



CONTINUED - Guest Bedroom

| DESCRIPTION                                                       | QUANTITY | UNIT PRICE | TAX           | GCO&P           | RCV             |
|-------------------------------------------------------------------|----------|------------|---------------|-----------------|-----------------|
| 440. R&R Window blind - fabric/woven - 14.1 to 20 SF - High grade | 3.00 EA  |            |               |                 | BID PENDING     |
| 441. R&R Window screen, 1 - 9 SF                                  | 1.00 EA  | 51.16      | 3.66          | 10.96           | 65.78           |
| 442. Lube/recondition operable window                             | 1.00 EA  | 162.52     | 0.15          | 32.54           | 195.21          |
| 443. Prime & paint French door slab only - exterior (per side)    | 2.00 EA  | 168.01     | 3.53          | 67.90           | 407.45          |
| 444. Paint door slab only - 2 coats (per side)                    | 4.00 EA  | 60.55      | 3.85          | 49.22           | 295.27          |
| -----Fixtures-----                                                |          |            |               |                 |                 |
| 445. R&R Recessed light fixture - High grade                      | 4.00 EA  |            |               |                 | OPEN ITEM       |
| <b>Totals: Guest Bedroom</b>                                      |          |            | <b>263.99</b> | <b>1,207.44</b> | <b>7,244.62</b> |



Guest Bathroom

Height: 8' 9"

|                           |                          |
|---------------------------|--------------------------|
| 262.98 SF Walls           | 50.48 SF Ceiling         |
| 313.47 SF Walls & Ceiling | 50.48 SF Floor           |
| 30.06 LF Ceil. Perimeter  | 30.06 LF Floor Perimeter |

Door

2' 6" X 6' 8"

Opens into GUEST\_BEDROO

Window

2' 9" X 2' 9"

Opens into Exterior

| DESCRIPTION                                | QUANTITY | UNIT PRICE | TAX  | GCO&P | RCV   |
|--------------------------------------------|----------|------------|------|-------|-------|
| ----Ceiling----                            |          |            |      |       |       |
| 446. Prime & paint cold air return (cover) | 1.00 EA  | 27.67      | 0.62 | 5.66  | 33.95 |

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - Guest Bathroom**

| DESCRIPTION                                                        | QUANTITY          | UNIT PRICE | TAX                           | GCO&P                     | RCV       |
|--------------------------------------------------------------------|-------------------|------------|-------------------------------|---------------------------|-----------|
| 447. Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 313.47 SF         | 1.53       | 6.55                          | 97.24                     | 583.40    |
| ----Walls----                                                      |                   |            |                               |                           |           |
| 448. Seal (1 coat) & paint (1 coat) baseboard                      | 30.06 LF          | 2.49       | 0.43                          | 15.06                     | 90.34     |
| -----Floor-----                                                    |                   |            |                               |                           |           |
| 449. Grout sealer                                                  | 50.48 SF          | 2.41       | 0.91                          | 24.52                     | 147.09    |
| -----Door/Windows-----                                             |                   |            |                               |                           |           |
| 450. Paint door/window trim & jamb - 2 coats (per side)            | 1.00 EA           | 51.53      | 0.58                          | 10.42                     | 62.53     |
| 451. R&R Window screen, 1 - 9 SF                                   | 1.00 EA           | 51.16      | 3.66                          | 10.96                     | 65.78     |
| 452. Lube/recondition operable window                              | 1.00 EA           | 162.52     | 0.15                          | 32.54                     | 195.21    |
| 453. Paint door slab only - 2 coats (per side)                     | 1.00 EA           | 60.55      | 0.96                          | 12.32                     | 73.83     |
| -----Fixtures-----                                                 |                   |            |                               |                           |           |
| 454. R&R Recessed light fixture - High grade                       | 1.00 EA           |            |                               |                           | OPEN ITEM |
| -----Shower-----                                                   |                   |            |                               |                           |           |
| 455. Seal grout on tile wall                                       | 98.85 SF          | 2.62       | 1.78                          | 52.16                     | 312.93    |
| Totals: Guest Bathroom                                             |                   |            | 15.64                         | 260.88                    | 1,565.06  |
| Area Totals: Guest Suite                                           |                   |            |                               |                           |           |
| 1,416.17 SF Walls                                                  | 433.49 SF Ceiling |            | 1,849.67 SF Walls and Ceiling |                           |           |
| 433.49 SF Floor                                                    |                   |            | 164.44 LF Floor Perimeter     |                           |           |
|                                                                    |                   |            |                               | 164.44 LF Ceil. Perimeter |           |
| Total: Guest Suite                                                 |                   |            | 324.95                        | 1,934.52                  | 11,606.72 |

## 75-79F9-18M3

|                            |                 |                  |                   |
|----------------------------|-----------------|------------------|-------------------|
| <b>Total: Second Floor</b> | <b>2,603.27</b> | <b>16,800.16</b> | <b>100,798.89</b> |
|----------------------------|-----------------|------------------|-------------------|

## ROOF1

**-----Removal-----**

58 Squares including waste as Recommended per Eagleview Report

Flat roof on Top - will be affected by tile removal.  
 \*\*The satellite dish was actually burned during the loss

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**CONTINUED - ROOF1**

| DESCRIPTION                                                               | QUANTITY  | UNIT PRICE | TAX             | GCO&P            | RCV               |
|---------------------------------------------------------------------------|-----------|------------|-----------------|------------------|-------------------|
| * 463. Roofing (Bid Item)<br>Decorative Mortar Build up<br>for Ridge Tile | 465.00 EA | 25.00 *    | 0.00            | 2,325.00         | 13,950.00         |
| 464. Drip edge                                                            | 555.00 LF | 4.33       | 61.16           | 492.88           | 2,957.19          |
| 465. R&R Counterflashing -<br>Apron flashing                              | 38.00 LF  | 19.34      | 7.51            | 148.48           | 890.91            |
| 466. Flashing - L flashing -<br>color finish                              | 79.00 LF  | 8.18       | 23.19           | 133.88           | 803.29            |
| Transition flashing for flat roof to tile roof                            |           |            |                 |                  |                   |
| 467. Valley metal - (W)<br>profile                                        | 162.59 LF | 10.44      | 51.28           | 349.74           | 2,098.46          |
| 468. Step flashing                                                        | 123.00 LF | 18.30      | 26.17           | 455.42           | 2,732.49          |
| 469. R&R Roof window<br>(skylight), 9.1 - 10 sf                           | 1.00 EA   | 1,279.10   | 98.30           | 275.48           | 1,652.88          |
| 470. R&R Chimney flashing -<br>average (32" x 36")                        | 4.00 EA   | 766.40     | 44.72           | 622.06           | 3,732.38          |
| 471. Flashing - pipe jack - 6"                                            | 11.00 EA  | 97.76      | 35.75           | 222.24           | 1,333.35          |
| <b>-----Roof Edge-----</b>                                                |           |            |                 |                  |                   |
| 472. Detach & Reset Gutter<br>guard/screen - Premium grade                | 511.00 LF | 13.47      | 0.00            | 1,376.64         | 8,259.81          |
| 473. Gutter / downspout -<br>Detach & reset                               | 711.00 LF | 6.06       | 0.00            | 861.74           | 5,170.40          |
| 474. Prime & paint gutter /<br>downspout                                  | 711.00 LF | 2.69       | 22.29           | 386.98           | 2,321.86          |
| 475. Prime & paint exterior<br>fascia - wood, 6" - 8" wide                | 571.00 LF | 3.53       | 14.65           | 406.06           | 2,436.34          |
| 476. Fall protection harness<br>and lanyard (per week)                    | 10.00 WK  | 22.00      | 0.00            | 44.00            | 264.00            |
| <b>Totals: ROOF1</b>                                                      |           |            | <b>3,048.90</b> | <b>27,835.32</b> | <b>167,011.68</b> |
| Area Totals: Roof                                                         |           |            |                 |                  |                   |

State Farm


KALYVAS, JAMES

75-79F9-18M3

|          |                    |        |                   |
|----------|--------------------|--------|-------------------|
| 4,795.18 | Exterior Wall Area | 49.60  | Number of Squares |
| 4,959.55 | Surface Area       | 396.25 | Total Hip Length  |
| 153.43   | Total Ridge Length |        |                   |

|             |          |           |            |
|-------------|----------|-----------|------------|
| Total: Roof | 3,048.90 | 27,835.32 | 167,011.68 |
|-------------|----------|-----------|------------|

Exterior

**Ext\_Surfaces**

6,317.54 SF Walls

498.06 LF Floor Perimeter

6,317.54 SF Walls &amp; Ceiling

|        |               |                     |
|--------|---------------|---------------------|
| Window | 2' 3" X 4'    | Opens into Exterior |
| Window | 4' 3" X 4'    | Opens into Exterior |
| Window | 5' X 4'       | Opens into Exterior |
| Window | 5' 2" X 4'    | Opens into Exterior |
| Window | 5' X 4'       | Opens into Exterior |
| Window | 3' 11" X 4'   | Opens into Exterior |
| Window | 5' X 4'       | Opens into Exterior |
| Window | 1' 6" X 9'    | Opens into Exterior |
| Window | 1' 6" X 9'    | Opens into Exterior |
| Door   | 4' X 9'       | Opens into Exterior |
| Window | 3' X 4'       | Opens into Exterior |
| Window | 4' 6" X 4'    | Opens into Exterior |
| Window | 2' 10" X 4'   | Opens into Exterior |
| Door   | 8' X 7'       | Opens into Exterior |
| Door   | 8' X 7'       | Opens into Exterior |
| Door   | 2' 6" X 6' 8" | Opens into Exterior |
| Window | 3' 6" X 1' 3" | Opens into Exterior |
| Window | 3' 6" X 5' 5" | Opens into Exterior |
| Door   | 5' X 6' 8"    | Opens into Exterior |
| Door   | 6' X 8'       | Opens into Exterior |
| Window | 1' 7" X 8'    | Opens into Exterior |
| Window | 2' 6" X 4'    | Opens into Exterior |
| Window | 2' 6" X 4'    | Opens into Exterior |
| Door   | 5' X 6' 8"    | Opens into Exterior |
| Door   | 2' 6" X 6' 8" | Opens into Exterior |
| Window | 1' 1" X 3'    | Opens into Exterior |
| Door   | 5' 8" X 6' 8" | Opens into Exterior |
| Door   | 5' 8" X 6' 8" | Opens into Exterior |
| Door   | 5' 8" X 6' 8" | Opens into Exterior |
| Window | 4' X 4'       | Opens into Exterior |
| Window | 2' 6" X 4'    | Opens into Exterior |
| Door   | 2' 6" X 6' 8" | Opens into Exterior |
| Window | 3' 4" X 4'    | Opens into Exterior |
| Window | 3' 10" X 4'   | Opens into Exterior |
| Door   | 2' 6" X 6' 8" | Opens into Exterior |
| Window | 3' 3" X 4'    | Opens into Exterior |

State Farm

KALYVAS, JAMES

75-79F9-18M3

|        |               |                     |
|--------|---------------|---------------------|
| Window | 4' 6" X 4'    | Opens into Exterior |
| Window | 2' 6" X 3' 6" | Opens into Exterior |
| Window | 2' 9" X 2' 9" | Opens into Exterior |
| Window | 4' 10" X 4'   | Opens into Exterior |
| Window | 2' X 4'       | Opens into Exterior |
| Window | 4' 6" X 4'    | Opens into Exterior |
| Window | 2' 6" X 4'    | Opens into Exterior |
| Door   | 5' X 6' 8"    | Opens into Exterior |
| Window | 1' 7" X 4'    | Opens into Exterior |
| Window | 2' 9" X 2'    | Opens into Exterior |

| DESCRIPTION                                                                                                                            | QUANTITY    | UNIT PRICE                         | TAX                           | GCO&P     | RCV        |
|----------------------------------------------------------------------------------------------------------------------------------------|-------------|------------------------------------|-------------------------------|-----------|------------|
| 477. R&R Metal lath & stucco                                                                                                           | 100.00 SF   | 10.51                              | 13.78                         | 212.96    | 1,277.74   |
| Second level area                                                                                                                      |             |                                    |                               |           |            |
| 478. Stucco repair around doors, windows, etc - 2nd floor                                                                              | 161.00 LF   | 33.41                              | 37.78                         | 1,083.36  | 6,500.15   |
| 479. Sandblasting - Extra heavy                                                                                                        | 7,097.54 SF | 2.56                               | 161.82                        | 3,666.30  | 21,997.82  |
| Exterior walls and overhangs                                                                                                           |             |                                    |                               |           |            |
| 480. Stucco color coat (Redash) - Synthetic                                                                                            | 7,097.54 SF | 10.77 *                            | 431.53                        | 15,374.40 | 92,246.44  |
| Custom color and finish application                                                                                                    |             |                                    |                               |           |            |
| 481. General Demolition - per hour                                                                                                     | 48.00 HR    | 68.61                              | 0.00                          | 658.66    | 3,951.94   |
| Remove landscape debris to access stucco                                                                                               |             |                                    |                               |           |            |
| 482. Exterior light fixture - Detach & reset                                                                                           | 23.00 EA    | 113.23                             | 0.00                          | 520.86    | 3,125.15   |
| The analysis and future performance of any fixture or appliance is excluded.                                                           |             |                                    |                               |           |            |
| Further attempts will be made to clean the masonry fixtures. If they are not successful, then it will need to be addressed separately. |             |                                    |                               |           |            |
| 483. Soda blasting - Extra heavy                                                                                                       | 1,250.00 SF | 7.52 *                             | 163.88                        | 1,912.78  | 11,476.66  |
| Totals: Ext_Surfaces                                                                                                                   |             |                                    | 808.79                        | 23,429.32 | 140,575.90 |
| Area Totals: Exterior                                                                                                                  |             |                                    |                               |           |            |
| 6,317.54 SF Walls                                                                                                                      |             | 498.06 Exterior Perimeter of Walls | 6,317.54 SF Walls and Ceiling |           |            |
| 6,317.54 Exterior Wall Area                                                                                                            |             |                                    | 498.06 LF Floor Perimeter     |           |            |
| Total: Exterior                                                                                                                        |             |                                    | 808.79                        | 23,429.32 | 140,575.90 |

## State Farm

KALYVAS, JAMES

75-79F9-18M3

### Area Totals: Main Structure

|                              |                                      |                                |
|------------------------------|--------------------------------------|--------------------------------|
| 22,385.99 SF Walls           | 6,209.76 SF Ceiling                  | 28,595.75 SF Walls and Ceiling |
| 5,941.32 SF Floor            | 6,761.82 Total Area                  | 2,039.38 LF Floor Perimeter    |
| 5,941.32 Floor Area          | 1,339.57 Exterior Perimeter of Walls | 1,839.26 LF Ceil. Perimeter    |
| 19,319.98 Exterior Wall Area |                                      | 15,873.01 Interior Wall Area   |
| 4,959.55 Surface Area        | 49.60 Number of Squares              |                                |
| 153.43 Total Ridge Length    | 396.25 Total Hip Length              |                                |

|                              |                 |                  |                   |
|------------------------------|-----------------|------------------|-------------------|
| <b>Total: Main Structure</b> | <b>8,489.04</b> | <b>86,010.74</b> | <b>516,060.94</b> |
|------------------------------|-----------------|------------------|-------------------|

### HVAC

|                   |                    |                         |
|-------------------|--------------------|-------------------------|
| 0.00 SF Walls     | 0.00 SF Ceiling    | 0.00 SF Walls & Ceiling |
| 0.00 SF Floor     | 0.00 SF Short Wall | 0.00 LF Floor Perimeter |
| 0.00 SF Long Wall |                    | 0.00 LF Ceil. Perimeter |

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

The evaluation of the HVAC system is pending a specialty contractor.

|                     |             |             |             |
|---------------------|-------------|-------------|-------------|
| <b>Totals: HVAC</b> | <b>0.00</b> | <b>0.00</b> | <b>0.00</b> |
|---------------------|-------------|-------------|-------------|

### Electrical

|                   |                    |                         |
|-------------------|--------------------|-------------------------|
| 0.00 SF Walls     | 0.00 SF Ceiling    | 0.00 SF Walls & Ceiling |
| 0.00 SF Floor     | 0.00 SF Short Wall | 0.00 LF Floor Perimeter |
| 0.00 SF Long Wall |                    | 0.00 LF Ceil. Perimeter |

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

|                                                                |         |          |      |        |          |
|----------------------------------------------------------------|---------|----------|------|--------|----------|
| 484. Megohmmeter check electrical circuits - average residence | 1.00 EA | 1,171.46 | 0.00 | 234.30 | 1,405.76 |
|----------------------------------------------------------------|---------|----------|------|--------|----------|

Any electrical system repairs are pending a specialty evaluation by an electrical contractor.

|                                      |          |        |       |        |          |
|--------------------------------------|----------|--------|-------|--------|----------|
| 485. R&R Smoke detector - High grade | 12.00 EA | 137.92 | 82.38 | 347.48 | 2,084.90 |
|--------------------------------------|----------|--------|-------|--------|----------|

|                                                |         |        |       |       |        |
|------------------------------------------------|---------|--------|-------|-------|--------|
| 486. R&R Carbon monoxide detector - High grade | 2.00 EA | 139.14 | 11.79 | 58.02 | 348.09 |
|------------------------------------------------|---------|--------|-------|-------|--------|

Any and all code upgrade/electrical repairs are pending an a specialty contractor evaluation.

|                           |              |               |                 |
|---------------------------|--------------|---------------|-----------------|
| <b>Totals: Electrical</b> | <b>94.17</b> | <b>639.80</b> | <b>3,838.75</b> |
|---------------------------|--------------|---------------|-----------------|



# State Farm

KALYVAS, JAMES

75-79F9-18M3

## Other Structures

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

### -----Pool Decking Stone Floor-----

|                          |             |  |  |  |           |
|--------------------------|-------------|--|--|--|-----------|
| 487. Regrout stone floor | 3,783.53 SF |  |  |  | OPEN ITEM |
| 488. Tile/stone sealer   | 3,783.53 SF |  |  |  | OPEN ITEM |

Extra coat of stone sealer after resurfacing. The grind and reseal line item only allows for one coat of sealer, the nature of the grinding of the stone will require multiple coats to protect the stone.

|                                                             |         |            |        |          |           |
|-------------------------------------------------------------|---------|------------|--------|----------|-----------|
| 489. R&R Radiant tube heater - Suspended - Gas (60,000 BTU) | 2.00 EA | 4,548.94 * | 595.57 | 1,938.68 | 11,632.13 |
|-------------------------------------------------------------|---------|------------|--------|----------|-----------|

this has been modified to reflect the pricing for this Lynx Electric heater

[https://www.bestbuy.com/site/lynx-professional-electric-heater-stainless-steel/5705191.p?skuId=5705191&extStoreId=107&utm\\_source=feed&ref=212&loc=19230189049&gad\\_source=4&gad\\_campaignid=19231438781&gbraid=0AAAAAD-ORljjbR4Wx7MSQoqNbvEvYUvTp&gclid=CjwKCAjwyb3DBhBlEiwAqZLe5IUEweb9WgLmVho03COOzwmwk7N922iLQ9uv1Dj5XBTaYRhkUBhVLxoCfe8QAvD\\_BwE&gclidsrc=aw.ds](https://www.bestbuy.com/site/lynx-professional-electric-heater-stainless-steel/5705191.p?skuId=5705191&extStoreId=107&utm_source=feed&ref=212&loc=19230189049&gad_source=4&gad_campaignid=19231438781&gbraid=0AAAAAD-ORljjbR4Wx7MSQoqNbvEvYUvTp&gclid=CjwKCAjwyb3DBhBlEiwAqZLe5IUEweb9WgLmVho03COOzwmwk7N922iLQ9uv1Dj5XBTaYRhkUBhVLxoCfe8QAvD_BwE&gclidsrc=aw.ds)

|                                    |           |  |  |  |          |
|------------------------------------|-----------|--|--|--|----------|
| 490. R&R Motorized blackout screen | 252.00 SF |  |  |  | EXCLUDED |
|------------------------------------|-----------|--|--|--|----------|

|                                 |           |      |       |        |          |
|---------------------------------|-----------|------|-------|--------|----------|
| 491. Exterior - paint two coats | 576.00 SF | 1.83 | 23.53 | 215.52 | 1,293.13 |
|---------------------------------|-----------|------|-------|--------|----------|

Trellis area

|                           |           |      |      |        |          |
|---------------------------|-----------|------|------|--------|----------|
| 492. Sand wood - exterior | 576.00 SF | 3.86 | 4.92 | 445.66 | 2,673.94 |
|---------------------------|-----------|------|------|--------|----------|

|                                                   |         |  |  |  |           |
|---------------------------------------------------|---------|--|--|--|-----------|
| 493. R&R Landscape fountain - Small (4' diameter) | 0.50 EA |  |  |  | OPEN ITEM |
|---------------------------------------------------|---------|--|--|--|-----------|

Additional Cleaning attempt to be made per notations

|                                                                  |         |        |        |        |          |
|------------------------------------------------------------------|---------|--------|--------|--------|----------|
| 494. R&R Ornamental iron fence gate, 3' - 4' wide - 3' - 4' high | 7.00 EA | 519.02 | 166.26 | 759.90 | 4,559.30 |
|------------------------------------------------------------------|---------|--------|--------|--------|----------|

3 gates in front of property, and 2 double gates enclosing the AC units - gates were reported to have been broken by the fire dept.

|                        |         |            |        |          |           |
|------------------------|---------|------------|--------|----------|-----------|
| * 495. Inset BBQ grill | 1.00 EA | 8,255.00 * | 498.75 | 1,750.76 | 10,504.51 |
|------------------------|---------|------------|--------|----------|-----------|

Fire Magic Aurora A830I 46-Inch Built-In Propane Gas & Charcoal Combo Grill With Analog Thermometer - A830I-7EAP-CB  
Fire Magic  
(1)  
\$8,255.00

State Farm

KALYVAS, JAMES

75-79F9-18M3

CONTINUED - Hardscapes and walkways

| DESCRIPTION                                                                                                            | QUANTITY | UNIT PRICE | TAX             | GCO&P           | RCV              |
|------------------------------------------------------------------------------------------------------------------------|----------|------------|-----------------|-----------------|------------------|
| 496. R&R Kitchen Sink - single basin - Premium grade                                                                   | 1.00 EA  | 981.68     | 77.66           | 211.88          | 1,271.22         |
| 497. Sink faucet - Kitchen - Premium grade                                                                             | 1.00 EA  | 537.90     | 41.85           | 115.96          | 695.71           |
| 2 kitchen sink faucets, 1 reverse osmosis faucet and a high grade soap pump, all high detail solid copper construction |          |            |                 |                 |                  |
| 498. Material Only Angle stop valve                                                                                    | 2.00 EA  | 12.48      | 2.37            | 5.48            | 32.81            |
| 499. Water line copper cap/plug - per cap                                                                              | 2.00 EA  | 29.74      | 0.31            | 11.96           | 71.75            |
| 500. Precast concrete entablature - 36"                                                                                | 1.00 EA  |            |                 |                 | OPEN ITEM        |
| 501. R&R Countertop - Granite or Marble - Premium grade                                                                | 43.08 SF | 145.17     | 354.21          | 1,321.62        | 7,929.75         |
| 502. Add on Granite or Marble - edge treatment - Premium grade                                                         | 22.17 LF | 74.07      | 0.00            | 328.42          | 1,970.55         |
| 503. Add on for undermount sink cutout & polish - single basin                                                         | 1.00 EA  | 231.49     | 0.00            | 46.30           | 277.79           |
| 504. Carpenter - Finish, Trim / Cabinet - per hour                                                                     | 3.00 HR  | 105.17     | 0.00            | 63.10           | 378.61           |
| detach and reset steel doors                                                                                           |          |            |                 |                 |                  |
| <b>Totals: Hardscapes and walkways</b>                                                                                 |          |            | <b>1,765.43</b> | <b>7,215.24</b> | <b>43,291.20</b> |

Landscaping

|                   |                    |                         |
|-------------------|--------------------|-------------------------|
| 0.00 SF Walls     | 0.00 SF Ceiling    | 0.00 SF Walls & Ceiling |
| 0.00 SF Floor     | 0.00 SF Short Wall | 0.00 LF Floor Perimeter |
| 0.00 SF Long Wall |                    | 0.00 LF Ceil. Perimeter |

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

# State Farm

KALYVAS, JAMES

75-79F9-18M3

## CONTINUED - Landscaping

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

All landscaping repairs are excluded.

|                            |  |  |             |             |             |
|----------------------------|--|--|-------------|-------------|-------------|
| <b>Totals: Landscaping</b> |  |  | <b>0.00</b> | <b>0.00</b> | <b>0.00</b> |
|----------------------------|--|--|-------------|-------------|-------------|

Area Totals: Other Structures

|                                |  |  |                 |                 |                  |
|--------------------------------|--|--|-----------------|-----------------|------------------|
| <b>Total: Other Structures</b> |  |  | <b>1,765.43</b> | <b>7,215.24</b> | <b>43,291.20</b> |
|--------------------------------|--|--|-----------------|-----------------|------------------|

### Code Upgrades

|                   |                    |                         |
|-------------------|--------------------|-------------------------|
| 0.00 SF Walls     | 0.00 SF Ceiling    | 0.00 SF Walls & Ceiling |
| 0.00 SF Floor     | 0.00 SF Short Wall | 0.00 LF Floor Perimeter |
| 0.00 SF Long Wall |                    | 0.00 LF Ceil. Perimeter |

| DESCRIPTION | QUANTITY | UNIT PRICE | TAX | GCO&P | RCV |
|-------------|----------|------------|-----|-------|-----|
|-------------|----------|------------|-----|-------|-----|

Additional damages discovered due to unforeseen conditions or city building code upgrades will be addressed separately and in writing.

|                              |  |  |             |             |             |
|------------------------------|--|--|-------------|-------------|-------------|
| <b>Totals: Code Upgrades</b> |  |  | <b>0.00</b> | <b>0.00</b> | <b>0.00</b> |
|------------------------------|--|--|-------------|-------------|-------------|

|                                       |  |  |                  |                   |                   |
|---------------------------------------|--|--|------------------|-------------------|-------------------|
| <b>Line Item Totals: 75-79F9-18M3</b> |  |  | <b>10,348.64</b> | <b>102,167.14</b> | <b>612,998.89</b> |
|---------------------------------------|--|--|------------------|-------------------|-------------------|

| COVERAGE | TAX | GCO&P | RCV |
|----------|-----|-------|-----|
|----------|-----|-------|-----|

|                                  |          |           |            |
|----------------------------------|----------|-----------|------------|
| Coverage A - Dwelling - 39 Smoke | 8,611.66 | 95,613.08 | 573,674.76 |
|----------------------------------|----------|-----------|------------|

|                                            |          |          |           |
|--------------------------------------------|----------|----------|-----------|
| Coverage A - Dwelling Extension - 39 Smoke | 1,736.98 | 6,554.06 | 39,324.13 |
|--------------------------------------------|----------|----------|-----------|

|       |           |            |            |
|-------|-----------|------------|------------|
| Total | 10,348.64 | 102,167.14 | 612,998.89 |
|-------|-----------|------------|------------|

State Farm

KALYVAS, JAMES

75-79F9-18M3

Grand Total Areas:

|                              |                                      |                                |
|------------------------------|--------------------------------------|--------------------------------|
| 22,385.99 SF Walls           | 6,209.76 SF Ceiling                  | 28,595.75 SF Walls and Ceiling |
| 5,941.32 SF Floor            |                                      | 2,039.38 LF Floor Perimeter    |
|                              |                                      | 1,839.26 LF Ceil. Perimeter    |
| 5,941.32 Floor Area          | 6,761.82 Total Area                  | 15,873.01 Interior Wall Area   |
| 19,319.98 Exterior Wall Area | 1,339.57 Exterior Perimeter of Walls |                                |
| 4,959.55 Surface Area        | 49.60 Number of Squares              |                                |
| 153.43 Total Ridge Length    | 396.25 Total Hip Length              |                                |

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                      | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P             | ACV                | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|------------------------------------------------------------------|------------------|---------------------|-------------------|--------------------|---------------------|----------------------------|
| <b>APP      APPLIANCES</b>                                       |                  |                     |                   |                    |                     |                            |
| Dryer - Gas - Premium grade                                      | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Washer/Washing Machine - Front-loading - Premium grade           | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL APPLIANCES</b>                                          |                  | <b>\$0.00</b>       | <b>\$0.00</b>     | <b>\$0.00</b>      | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>CAB      CABINETRY</b>                                        |                  |                     |                   |                    |                     |                            |
| Add on Granite or Marble - edge treatment - Premium grade        | 22.17 LF         | \$1,970.55          | \$328.42          | \$1,970.55         | \$0.00              | \$0.00                     |
| Countertop - Granite or Marble - Premium grade                   | 43.08 SF         | \$7,507.92          | \$1,251.32        | \$7,507.92         | \$0.00              | \$0.00                     |
| Countertop - Granite or Marble - buff & polish                   | 99.00 SF         | \$2,205.59          | \$367.60          | \$2,205.59         | \$0.00              | \$0.00                     |
| Add on for undermount sink cutout & polish - single basin        | 1.00 EA          | \$277.79            | \$46.30           | \$277.79           | \$0.00              | \$0.00                     |
| Garage cabinetry - full height unit, 36"x18" - High grade        | 4.00 EA          | \$2,910.59          | \$485.10          | \$2,910.59         | \$0.00              | \$0.00                     |
| Garage cab. - upper (wall) units, 24" - High grade               | 3.50 EA          | \$1,105.98          | \$184.32          | \$1,105.98         | \$0.00              | \$0.00                     |
| Detach & Reset Cabinet knob or pull - Premium grade              | 92.00 EA         | \$394.12            | \$65.68           | \$394.12           | \$0.00              | \$0.00                     |
| Cabinet knobs or pulls - Detach & reset                          | 44.00 EA         | \$188.50            | \$31.42           | \$188.50           | \$0.00              | \$0.00                     |
| Carpenter - Finish, Trim / Cabinet - per hour                    | 3.00 HR          | \$378.61            | \$63.10           | \$378.61           | \$0.00              | \$0.00                     |
| Vanity - Detach & reset                                          | 9.00 LF          | \$878.59            | \$146.44          | \$878.59           | \$0.00              | \$0.00                     |
| <b>TOTAL CABINETRY</b>                                           |                  | <b>\$17,818.24</b>  | <b>\$2,969.70</b> | <b>\$17,818.24</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>CLN      CLEANING</b>                                         |                  |                     |                   |                    |                     |                            |
| Final cleaning - construction - Residential                      | 5,941.32 SF      | \$2,994.44          | \$499.08          | \$2,994.44         | \$0.00              | \$0.00                     |
| Clean with pressure/chemical spray                               | 520.51 SF        | \$325.40            | \$54.24           | \$325.40           | \$0.00              | \$0.00                     |
| Sandblasting - Extra heavy                                       | 7,097.54 SF      | \$21,997.82         | \$3,666.30        | \$21,997.82        | \$0.00              | \$0.00                     |
| Soda blasting - Heavy                                            | 158.00 SF        | \$742.84            | \$123.82          | \$742.84           | \$0.00              | \$0.00                     |
| Soda blasting - Extra heavy                                      | 1,250.00 SF      | \$11,476.66         | \$1,912.78        | \$11,476.66        | \$0.00              | \$0.00                     |
| <b>TOTAL CLEANING</b>                                            |                  | <b>\$37,537.16</b>  | <b>\$6,256.22</b> | <b>\$37,537.16</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>DMO      GENERAL DEMOLITION</b>                               |                  |                     |                   |                    |                     |                            |
| Remove Dryer - Gas - Premium grade                               | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Remove Washer/Washing Machine - Front-loading - Premium grade    | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Remove Countertop - Granite or Marble - Premium grade            | 43.08 SF         | \$421.83            | \$70.30           | \$421.83           | \$0.00              | \$0.00                     |
| Remove Garage cabinetry - full height unit, 36"x18" - High grade | 4.00 EA          | \$196.46            | \$32.74           | \$196.46           | \$0.00              | \$0.00                     |
| Remove Garage cab. - upper (wall) units, 24" -                   | 3.50 EA          | \$96.26             | \$16.04           | \$96.26            | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 69

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                     | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P    | ACV        | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|-----------------------------------------------------------------|------------------|---------------------|----------|------------|---------------------|----------------------------|
| <b>DMO GENERAL DEMOLITION</b>                                   |                  |                     |          |            |                     |                            |
| High grade                                                      |                  |                     |          |            |                     |                            |
| Single axle dump truck - per load - including dump fees         | 1.00 EA          | \$473.36            | \$78.90  | \$473.36   | \$0.00              | \$0.00                     |
| Dumpster load - Approx. 20 yards, 4 tons of debris              | 1.00 EA          | \$939.60            | \$156.60 | \$939.60   | \$0.00              | \$0.00                     |
| Dumpster load - Approx. 40 yards, 7-8 tons of debris            | 2.00 EA          | \$3,357.72          | \$559.62 | \$3,357.72 | \$0.00              | \$0.00                     |
| General Demolition - per hour                                   | 48.00 HR         | \$3,951.94          | \$658.66 | \$3,951.94 | \$0.00              | \$0.00                     |
| Remove Bathroom ventilation fan                                 | 1.00 EA          | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Carbon monoxide detector - High grade                    | 2.00 EA          | \$40.32             | \$6.72   | \$40.32    | \$0.00              | \$0.00                     |
| Remove Smoke detector - High grade                              | 12.00 EA         | \$241.92            | \$40.32  | \$241.92   | \$0.00              | \$0.00                     |
| Remove Central vacuum - cleaning system                         | 1.00 EA          | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Carpet pad - Premium grade                               | 42.50 SF         | \$9.19              | \$1.54   | \$9.19     | \$0.00              | \$0.00                     |
| Add for glued down wood flooring appl. over wood substrate      | 317.02 SF        | \$1,730.92          | \$288.48 | \$1,730.92 | \$0.00              | \$0.00                     |
| Add for glued down wood flooring appl. over wood substrate      | 903.00 SF        | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Stair nosing - for wood flooring                         | 52.83 LF         | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Engineered wood flooring - step charge (tread and riser) | 57.00 LF         | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Tear out wood flooring and subfloor                      | 997.66 SF        | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Baseboard - 4 1/4"                                       | 197.02 LF        | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Crown molding - 7-piece - stain grade                    | 70.22 LF         | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Radiant tube heater - Suspended - Gas (60,000 BTU)       | 2.00 EA          | \$136.24            | \$22.70  | \$136.24   | \$0.00              | \$0.00                     |
| Remove Light fixture - High grade                               | 5.00 EA          | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Light fixture - Premium grade                            | 1.00 EA          | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Chandelier - Wrought iron - 48"-60" diameter             | 1.00 EA          | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Recessed light fixture - High grade                      | 15.00 EA         | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Recessed light fixture - High grade                      | 126.00 EA        | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Light fixture - wall sconce - High grade                 | 11.00 EA         | \$0.00              | \$0.00   | \$0.00     | \$0.00              | \$0.00                     |
| Remove Vanity top - one sink - cultured marble - High grade     | 3.83 LF          | \$30.01             | \$5.00   | \$30.01    | \$0.00              | \$0.00                     |
| Remove Ornamental iron fence gate, 3' - 4' wide - 3' - 4' high  | 7.00 EA          | \$212.02            | \$35.34  | \$212.02   | \$0.00              | \$0.00                     |
| Remove Kitchen Sink - single basin - Premium grade              | 1.00 EA          | \$34.08             | \$5.68   | \$34.08    | \$0.00              | \$0.00                     |
| Remove Water heater - 100 gal - CA approved                     | 1.00 EA          | \$116.77            | \$19.46  | \$116.77   | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 70

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                     | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P      | ACV         | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|-----------------------------------------------------------------|------------------|---------------------|------------|-------------|---------------------|----------------------------|
| <b>DMO    GENERAL DEMOLITION</b>                                |                  |                     |            |             |                     |                            |
| Remove Water heater seismic strap kit - 56 to 80 gallon         | 1.00 EA          | \$19.47             | \$3.24     | \$19.47     | \$0.00              | \$0.00                     |
| Remove Modified bitumen roof - self-adhering                    | 3.67 SQ          | \$340.65            | \$56.78    | \$340.65    | \$0.00              | \$0.00                     |
| Remove Chimney flashing - average (32" x 36")                   | 4.00 EA          | \$136.32            | \$22.72    | \$136.32    | \$0.00              | \$0.00                     |
| Remove Counterflashing - Apron flashing                         | 38.00 LF         | \$40.58             | \$6.76     | \$40.58     | \$0.00              | \$0.00                     |
| Remove Additional charge for high roof (2 stories or greater)   | 49.60 SQ         | \$476.16            | \$79.36    | \$476.16    | \$0.00              | \$0.00                     |
| Remove Tile roofing - Clay - Barrel (mission) tile              | 45.97 SQ         | \$15,685.33         | \$2,614.22 | \$15,685.33 | \$0.00              | \$0.00                     |
| Remove Landscape fountain - Small (4' diameter)                 | 0.50 EA          | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |
| Remove Sauna - interior - 4' x 6'                               | 1.00 EA          | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |
| Remove Built-in theater speaker system - Deluxe grade           | 1.00 EA          | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |
| Remove Metal lath & stucco                                      | 100.00 SF        | \$136.80            | \$22.80    | \$136.80    | \$0.00              | \$0.00                     |
| Remove Ceramic/porcelain tile - High grade                      | 58.13 SF         | \$210.67            | \$35.12    | \$210.67    | \$0.00              | \$0.00                     |
| Remove Ceramic/porcelain tile - Premium grade                   | 2.00 SF          | \$7.24              | \$1.20     | \$7.24      | \$0.00              | \$0.00                     |
| Remove Ceramic tile - bullnose - 3/4" x 6" - High grade         | 8.66 LF          | \$33.14             | \$5.52     | \$33.14     | \$0.00              | \$0.00                     |
| Remove Travertine tile - bullnose - 2" x 6" - Premium grade     | 25.93 LF         | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |
| Remove Mortar bed for tile                                      | 138.33 SF        | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |
| Remove Mosaic - ceramic/porcelain tile - Premium grade          | 8.75 SF          | \$31.71             | \$5.28     | \$31.71     | \$0.00              | \$0.00                     |
| Remove Tile shower - 101 to 120 SF - High grade                 | 1.00 EA          | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |
| Remove Travertine tile - Premium grade                          | 394.58 SF        | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |
| Remove Patio door screen, 36" wide                              | 3.00 EA          | \$27.44             | \$4.58     | \$27.44     | \$0.00              | \$0.00                     |
| Remove Patio door screen, 36" wide                              | 4.00 EA          | \$36.58             | \$6.10     | \$36.58     | \$0.00              | \$0.00                     |
| Remove Window screen, 10 - 16 SF                                | 19.00 EA         | \$130.42            | \$21.74    | \$130.42    | \$0.00              | \$0.00                     |
| Remove Window screen, 1 - 9 SF                                  | 2.00 EA          | \$13.72             | \$2.28     | \$13.72     | \$0.00              | \$0.00                     |
| Remove Window screen, 1 - 9 SF                                  | 2.00 EA          | \$13.76             | \$2.28     | \$13.76     | \$0.00              | \$0.00                     |
| Remove Window screen, 1 - 9 SF                                  | 17.00 EA         | \$116.64            | \$19.40    | \$116.64    | \$0.00              | \$0.00                     |
| Remove Roof window (skylight), 9.1 - 10 sf                      | 1.00 EA          | \$82.21             | \$13.70    | \$82.21     | \$0.00              | \$0.00                     |
| Remove Window blind - fabric/woven - 14.1 to 20 SF - High grade | 3.00 EA          | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |
| Remove Window shade - roll up                                   | 2.00 EA          | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |
| Remove Window shade - roll up - Large                           | 1.00 EA          | \$0.00              | \$0.00     | \$0.00      | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 71

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                               | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P             | ACV                | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|-----------------------------------------------------------|------------------|---------------------|-------------------|--------------------|---------------------|----------------------------|
| <b>DMO GENERAL DEMOLITION</b>                             |                  |                     |                   |                    |                     |                            |
| Remove Motorized blackout screen                          | 252.00 SF        | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL GENERAL DEMOLITION</b>                           |                  | <b>\$29,527.48</b>  | <b>\$4,921.18</b> | <b>\$29,527.48</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>DOR DOORS</b>                                          |                  |                     |                   |                    |                     |                            |
| Bifold door set - (4 slabs only) - Double Detach & reset  | 1.00 EA          | \$57.12             | \$9.52            | \$57.12            | \$0.00              | \$0.00                     |
| Interior door - Detach & reset                            | 4.00 EA          | \$549.29            | \$91.54           | \$549.29           | \$0.00              | \$0.00                     |
| Interior door - Detach & reset                            | 5.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Overhead (garage) door opener - Detach & reset            | 2.00 EA          | \$612.14            | \$102.02          | \$612.14           | \$0.00              | \$0.00                     |
| <b>TOTAL DOORS</b>                                        |                  | <b>\$1,218.55</b>   | <b>\$203.08</b>   | <b>\$1,218.55</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>DRY DRYWALL</b>                                        |                  |                     |                   |                    |                     |                            |
| 1/2" drywall - hung, taped, with smooth wall finish       | 90.54 SF         | \$655.65            | \$109.28          | \$655.65           | \$0.00              | \$0.00                     |
| 1/2" drywall - hung, taped, ready for texture             | 132.81 SF        | \$604.45            | \$100.74          | \$604.45           | \$0.00              | \$0.00                     |
| 5/8" drywall - hung, taped, ready for texture             | 137.79 SF        | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Tape joint for new to existing drywall - per LF           | 33.12 LF         | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Tape joint for new to existing drywall - per LF           | 21.25 LF         | \$423.44            | \$70.58           | \$423.44           | \$0.00              | \$0.00                     |
| Texture drywall - smooth / skim coat                      | 3,106.46 SF      | \$10,002.69         | \$1,667.12        | \$10,002.69        | \$0.00              | \$0.00                     |
| <b>TOTAL DRYWALL</b>                                      |                  | <b>\$11,686.23</b>  | <b>\$1,947.72</b> | <b>\$11,686.23</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>ELE ELECTRICAL</b>                                     |                  |                     |                   |                    |                     |                            |
| Bathroom ventilation fan                                  | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Breaker panel - 70 to 150 amp - Detach & reset            | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Carbon monoxide detector - High grade                     | 2.00 EA          | \$307.77            | \$51.30           | \$307.77           | \$0.00              | \$0.00                     |
| Megohmmeter check electrical circuits - average residence | 1.00 EA          | \$1,405.76          | \$234.30          | \$1,405.76         | \$0.00              | \$0.00                     |
| Rewire\wire - avg. residence - boxes & wiring             | 130.00 SF        | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Smoke detector - High grade                               | 12.00 EA         | \$1,842.98          | \$307.16          | \$1,842.98         | \$0.00              | \$0.00                     |
| <b>TOTAL ELECTRICAL</b>                                   |                  | <b>\$3,556.51</b>   | <b>\$592.76</b>   | <b>\$3,556.51</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>ELS ELECTRICAL - SPECIAL SYSTEMS</b>                   |                  |                     |                   |                    |                     |                            |
| Central vacuum - cleaning system                          | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL ELECTRICAL - SPECIAL SYSTEMS</b>                 |                  | <b>\$0.00</b>       | <b>\$0.00</b>     | <b>\$0.00</b>      | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>FCC FLOOR COVERING - CARPET</b>                        |                  |                     |                   |                    |                     |                            |
| Carpet - Premium grade                                    | 2,272.44 SF      | \$23,344.50         | \$3,890.72        | \$23,344.50        | \$0.00              | \$0.00                     |
| Carpet - Premium grade                                    | 78.20 SF         | \$803.35            | \$133.90          | \$803.35           | \$0.00              | \$0.00                     |
| Carpet pad - Premium grade                                | 42.50 SF         | \$81.97             | \$13.66           | \$81.97            | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 72



## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P             | ACV                | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|------------------------------------------------------------|------------------|---------------------|-------------------|--------------------|---------------------|----------------------------|
| <b>FCC FLOOR COVERING - CARPET</b>                         |                  |                     |                   |                    |                     |                            |
| Carpet pad - Premium grade                                 | 1,890.86 SF      | \$3,647.07          | \$607.90          | \$3,647.07         | \$0.00              | \$0.00                     |
| Step charge for "waterfall" carpet installation            | 17.00 EA         | \$270.57            | \$45.10           | \$270.57           | \$0.00              | \$0.00                     |
| <b>TOTAL FLOOR COVERING - CARPET</b>                       |                  | <b>\$28,147.46</b>  | <b>\$4,691.28</b> | <b>\$28,147.46</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>FCS FLOOR COVERING - STONE</b>                          |                  |                     |                   |                    |                     |                            |
| RegROUT stone floor                                        | 1,534.44 SF      | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| RegROUT stone floor                                        | 3,783.53 SF      | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Travertine floor - buff & polish                           | 1,534.44 SF      | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Tile/stone sealer                                          | 1,161.72 SF      | \$2,181.91          | \$363.64          | \$2,181.91         | \$0.00              | \$0.00                     |
| Tile/stone sealer                                          | 199.79 SF        | \$375.24            | \$62.54           | \$375.24           | \$0.00              | \$0.00                     |
| Tile/stone sealer                                          | 1,162.64 SF      | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Tile/stone sealer                                          | 3,783.53 SF      | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Travertine resurfacing - grind and re-seal                 | 1,534.44 SF      | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL FLOOR COVERING - STONE</b>                        |                  | <b>\$2,557.15</b>   | <b>\$426.18</b>   | <b>\$2,557.15</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>FCT FLOOR COVERING - CERAMIC TILE</b>                   |                  |                     |                   |                    |                     |                            |
| Add-on for detail tile installation                        | 264.13 SF        | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Grout sealer                                               | 50.48 SF         | \$147.09            | \$24.52           | \$147.09           | \$0.00              | \$0.00                     |
| Grout sealer                                               | 186.46 SF        | \$543.29            | \$90.56           | \$543.29           | \$0.00              | \$0.00                     |
| Tile/stone sealer                                          | 96.00 SF         | \$179.15            | \$29.86           | \$179.15           | \$0.00              | \$0.00                     |
| <b>TOTAL FLOOR COVERING - CERAMIC TILE</b>                 |                  | <b>\$869.53</b>     | <b>\$144.94</b>   | <b>\$869.53</b>    | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>FCW FLOOR COVERING - WOOD</b>                           |                  |                     |                   |                    |                     |                            |
| Add for glued down wood flooring appl. over wood substrate | 317.02 SF        | \$580.32            | \$96.72           | \$580.32           | \$0.00              | \$0.00                     |
| Add for glued down wood flooring appl. over wood substrate | 903.00 SF        | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Stair nosing - for wood flooring                           | 52.83 LF         | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Stair nosing - for wood flooring                           | 46.47 LF         | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Engineered wood flooring - High grade                      | 317.02 SF        | \$5,532.38          | \$922.06          | \$5,532.38         | \$0.00              | \$0.00                     |
| Engineered wood flooring - High grade                      | 997.66 SF        | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Engineered wood flooring - step charge (tread and riser)   | 57.00 LF         | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Engineered wood flooring - step charge (tread and riser)   | 57.00 LF         | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL FLOOR COVERING - WOOD</b>                         |                  | <b>\$6,112.70</b>   | <b>\$1,018.78</b> | <b>\$6,112.70</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>FEE PERMITS AND FEES</b>                                |                  |                     |                   |                    |                     |                            |
| Asbestos test fee - full service survey - base fee         | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 73

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                           | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P             | ACV                | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|-----------------------------------------------------------------------|------------------|---------------------|-------------------|--------------------|---------------------|----------------------------|
| <b>FEE PERMITS AND FEES</b>                                           |                  |                     |                   |                    |                     |                            |
| and any abatement                                                     |                  |                     |                   |                    |                     |                            |
| High Density Large Inner City- Material staging (Bid Item)            | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Lead test fee - full service lead survey - base fee and any abatement | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Environmental testing and any remediation                             | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Taxes, insurance, permits & fees (Bid Item)                           | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL PERMITS AND FEES</b>                                         |                  | <b>\$0.00</b>       | <b>\$0.00</b>     | <b>\$0.00</b>      | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>FNC FINISH CARPENTRY / TRIMWORK</b>                                |                  |                     |                   |                    |                     |                            |
| Baseboard - 4 1/4"                                                    | 197.02 LF        | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Baseboard - 4 1/4"                                                    | 70.22 LF         | \$502.82            | \$83.82           | \$502.82           | \$0.00              | \$0.00                     |
| Closet Organizer - Melamine or Wire - Detach & reset                  | 17.42 LF         | \$1,753.63          | \$292.26          | \$1,753.63         | \$0.00              | \$0.00                     |
| Closet shelf and rod package - Detach & reset                         | 48.67 LF         | \$888.31            | \$148.04          | \$888.31           | \$0.00              | \$0.00                     |
| Crown molding - 7-piece - stain grade                                 | 70.22 LF         | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL FINISH CARPENTRY / TRIMWORK</b>                              |                  | <b>\$3,144.76</b>   | <b>\$524.12</b>   | <b>\$3,144.76</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>FNH FINISH HARDWARE</b>                                            |                  |                     |                   |                    |                     |                            |
| TV Brackets - Wall or ceiling mounted - Detach & reset                | 1.00 EA          | \$81.73             | \$13.62           | \$81.73            | \$0.00              | \$0.00                     |
| <b>TOTAL FINISH HARDWARE</b>                                          |                  | <b>\$81.73</b>      | <b>\$13.62</b>    | <b>\$81.73</b>     | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>FRM FRAMING &amp; ROUGH CARPENTRY</b>                              |                  |                     |                   |                    |                     |                            |
| Underlayment - 5/8" BC plywood                                        | 317.02 SF        | \$1,418.97          | \$236.50          | \$1,418.97         | \$0.00              | \$0.00                     |
| Underlayment - 5/8" BC plywood                                        | 903.00 SF        | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL FRAMING &amp; ROUGH CARPENTRY</b>                            |                  | <b>\$1,418.97</b>   | <b>\$236.50</b>   | <b>\$1,418.97</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>HVC HEAT, VENT &amp; AIR CONDITIONING</b>                          |                  |                     |                   |                    |                     |                            |
| Radiant tube heater - Suspended - Gas (60,000 BTU)                    | 2.00 EA          | \$11,495.89         | \$1,915.98        | \$11,495.89        | \$0.00              | \$0.00                     |
| <b>TOTAL HEAT, VENT &amp; AIR CONDITIONING</b>                        |                  | <b>\$11,495.89</b>  | <b>\$1,915.98</b> | <b>\$11,495.89</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>INS INSULATION</b>                                                 |                  |                     |                   |                    |                     |                            |
| Batt insulation - 12" - R38 - unfaced batt                            | 132.81 SF        | \$433.43            | \$72.24           | \$433.43           | \$0.00              | \$0.00                     |
| <b>TOTAL INSULATION</b>                                               |                  | <b>\$433.43</b>     | <b>\$72.24</b>    | <b>\$433.43</b>    | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>LAB LABOR ONLY</b>                                                 |                  |                     |                   |                    |                     |                            |
| Residential Supervision / Project Management - per hour               | 150.00 HR        | \$15,496.20         | \$2,582.70        | \$15,496.20        | \$0.00              | \$0.00                     |
| <b>TOTAL LABOR ONLY</b>                                               |                  | <b>\$15,496.20</b>  | <b>\$2,582.70</b> | <b>\$15,496.20</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>LIT LIGHT FIXTURES</b>                                             |                  |                     |                   |                    |                     |                            |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 74

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                   | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P           | ACV               | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|---------------------------------------------------------------|------------------|---------------------|-----------------|-------------------|---------------------|----------------------------|
| <b>LIT LIGHT FIXTURES</b>                                     |                  |                     |                 |                   |                     |                            |
| Light fixture - High grade                                    | 5.00 EA          | \$0.00              | \$0.00          | \$0.00            | \$0.00              | \$0.00                     |
| Light fixture - Premium grade                                 | 1.00 EA          | \$0.00              | \$0.00          | \$0.00            | \$0.00              | \$0.00                     |
| Chandelier - Wrought iron - 48"-60" diameter                  | 1.00 EA          | \$0.00              | \$0.00          | \$0.00            | \$0.00              | \$0.00                     |
| Recessed light fixture - High grade                           | 15.00 EA         | \$0.00              | \$0.00          | \$0.00            | \$0.00              | \$0.00                     |
| Recessed light fixture - High grade                           | 126.00 EA        | \$0.00              | \$0.00          | \$0.00            | \$0.00              | \$0.00                     |
| Light fixture - wall sconce - High grade                      | 11.00 EA         | \$0.00              | \$0.00          | \$0.00            | \$0.00              | \$0.00                     |
| Detach & Reset Light fixture - wall sconce - High grade       | 2.00 EA          | \$183.02            | \$30.50         | \$183.02          | \$0.00              | \$0.00                     |
| Exterior light fixture - Detach & reset                       | 23.00 EA         | \$3,125.15          | \$520.86        | \$3,125.15        | \$0.00              | \$0.00                     |
| <b>TOTAL LIGHT FIXTURES</b>                                   |                  | <b>\$3,308.17</b>   | <b>\$551.36</b> | <b>\$3,308.17</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>MAS MASONRY</b>                                            |                  |                     |                 |                   |                     |                            |
| Precast concrete entablature - 36"                            | 1.00 EA          | \$0.00              | \$0.00          | \$0.00            | \$0.00              | \$0.00                     |
| <b>TOTAL MASONRY</b>                                          |                  | <b>\$0.00</b>       | <b>\$0.00</b>   | <b>\$0.00</b>     | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>MBL MARBLE - CULTURED OR NATURAL</b>                       |                  |                     |                 |                   |                     |                            |
| Vanity top - one sink - cultured marble - High grade          | 3.83 LF          | \$781.78            | \$130.30        | \$781.78          | \$0.00              | \$0.00                     |
| <b>TOTAL MARBLE - CULTURED OR NATURAL</b>                     |                  | <b>\$781.78</b>     | <b>\$130.30</b> | <b>\$781.78</b>   | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>MSD MIRRORS &amp; SHOWER DOORS</b>                         |                  |                     |                 |                   |                     |                            |
| Custom shower door & partition - frameless- Detach & reset    | 70.00 SF         | \$0.00              | \$0.00          | \$0.00            | \$0.00              | \$0.00                     |
| <b>TOTAL MIRRORS &amp; SHOWER DOORS</b>                       |                  | <b>\$0.00</b>       | <b>\$0.00</b>   | <b>\$0.00</b>     | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>ORI ORNAMENTAL IRON</b>                                    |                  |                     |                 |                   |                     |                            |
| Ornamental iron fence gate, 3' - 4' wide - 3' - 4' high       | 7.00 EA          | \$4,347.28          | \$724.56        | \$4,347.28        | \$0.00              | \$0.00                     |
| <b>TOTAL ORNAMENTAL IRON</b>                                  |                  | <b>\$4,347.28</b>   | <b>\$724.56</b> | <b>\$4,347.28</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>PLM PLUMBING</b>                                           |                  |                     |                 |                   |                     |                            |
| Gas/water line cap/plug - per cap                             | 2.00 EA          | \$43.90             | \$7.32          | \$43.90           | \$0.00              | \$0.00                     |
| Gas/water line cap/plug - per cap                             | 1.00 EA          | \$21.94             | \$3.66          | \$21.94           | \$0.00              | \$0.00                     |
| Water line copper cap/plug - per cap                          | 2.00 EA          | \$71.75             | \$11.96         | \$71.75           | \$0.00              | \$0.00                     |
| Water line copper cap/plug - per cap                          | 2.00 EA          | \$71.75             | \$11.96         | \$71.75           | \$0.00              | \$0.00                     |
| Sink faucet - Kitchen - Premium grade                         | 1.00 EA          | \$695.71            | \$115.96        | \$695.71          | \$0.00              | \$0.00                     |
| Detach & Reset Sink faucet - Bathroom - High grade            | 1.00 EA          | \$179.80            | \$29.96         | \$179.80          | \$0.00              | \$0.00                     |
| Install Flexible gas supply line connector - 1/2" - up to 24" | 1.00 EA          | \$15.59             | \$2.60          | \$15.59           | \$0.00              | \$0.00                     |
| Plumber - per hour                                            | 6.00 HR          | \$1,008.00          | \$168.00        | \$1,008.00        | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 75

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                      | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P             | ACV                | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|--------------------------------------------------|------------------|---------------------|-------------------|--------------------|---------------------|----------------------------|
| <b>PLM PLUMBING</b>                              |                  |                     |                   |                    |                     |                            |
| Pedestal sink - Detach & reset                   | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Plumbing/gas line air pressure test              | 1.00 EA          | \$257.24            | \$42.88           | \$257.24           | \$0.00              | \$0.00                     |
| Detach & Reset P-trap assembly - ABS (plastic)   | 1.00 EA          | \$88.65             | \$14.78           | \$88.65            | \$0.00              | \$0.00                     |
| Kitchen Sink - single basin - Premium grade      | 1.00 EA          | \$1,237.14          | \$206.20          | \$1,237.14         | \$0.00              | \$0.00                     |
| Material Only Angle stop valve                   | 2.00 EA          | \$32.81             | \$5.48            | \$32.81            | \$0.00              | \$0.00                     |
| Install Plumbing fixture supply line             | 2.00 EA          | \$40.72             | \$6.78            | \$40.72            | \$0.00              | \$0.00                     |
| Toilet - Detach & reset                          | 2.00 EA          | \$734.50            | \$122.44          | \$734.50           | \$0.00              | \$0.00                     |
| Detach & Reset Tub/shower faucet - Premium grade | 2.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Water heater - 100 gal - CA approved             | 1.00 EA          | \$7,309.59          | \$1,218.26        | \$7,309.59         | \$0.00              | \$0.00                     |
| Water heater seismic strap kit - 56 to 80 gallon | 1.00 EA          | \$93.92             | \$15.66           | \$93.92            | \$0.00              | \$0.00                     |
| <b>TOTAL PLUMBING</b>                            |                  | <b>\$11,903.01</b>  | <b>\$1,983.90</b> | <b>\$11,903.01</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>PNT PAINTING</b>                              |                  |                     |                   |                    |                     |                            |
| Seal (1 coat) & paint (1 coat) baseboard         | 46.47 LF         | \$139.65            | \$23.28           | \$139.65           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 25.05 LF         | \$75.29             | \$12.56           | \$75.29            | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 30.06 LF         | \$90.34             | \$15.06           | \$90.34            | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 81.56 LF         | \$245.10            | \$40.86           | \$245.10           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 52.83 LF         | \$158.78            | \$26.48           | \$158.78           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 91.15 LF         | \$273.92            | \$45.66           | \$273.92           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 81.46 LF         | \$244.80            | \$40.80           | \$244.80           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 34.05 LF         | \$102.33            | \$17.06           | \$102.33           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 82.13 LF         | \$246.81            | \$41.14           | \$246.81           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 29.16 LF         | \$87.63             | \$14.60           | \$87.63            | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 72.53 LF         | \$217.95            | \$36.32           | \$217.95           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 28.25 LF         | \$84.88             | \$14.14           | \$84.88            | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 73.61 LF         | \$221.22            | \$36.88           | \$221.22           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 108.91 LF        | \$327.30            | \$54.56           | \$327.30           | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (1 coat) baseboard         | 59.50 LF         | \$178.83            | \$29.82           | \$178.83           | \$0.00              | \$0.00                     |
| Paint baseboard - two coats                      | 135.90 LF        | \$394.03            | \$65.68           | \$394.03           | \$0.00              | \$0.00                     |
| Paint baseboard - two coats                      | 61.70 LF         | \$178.90            | \$29.82           | \$178.90           | \$0.00              | \$0.00                     |
| Paint baseboard - two coats                      | 89.14 LF         | \$258.44            | \$43.06           | \$258.44           | \$0.00              | \$0.00                     |
| Paint baseboard - two coats                      | 44.04 LF         | \$127.69            | \$21.28           | \$127.69           | \$0.00              | \$0.00                     |
| Paint baseboard - two coats                      | 56.86 LF         | \$164.86            | \$27.48           | \$164.86           | \$0.00              | \$0.00                     |
| Paint baseboard - two coats                      | 53.21 LF         | \$154.28            | \$25.72           | \$154.28           | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 76

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                             | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P    | ACV        | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|---------------------------------------------------------|------------------|---------------------|----------|------------|---------------------|----------------------------|
| <b>PNT PAINTING</b>                                     |                  |                     |          |            |                     |                            |
| Paint baseboard - two coats                             | 70.22 LF         | \$203.58            | \$33.92  | \$203.58   | \$0.00              | \$0.00                     |
| Stain & finish wood beam                                | 44.79 SF         | \$234.24            | \$39.04  | \$234.24   | \$0.00              | \$0.00                     |
| Seal brick with masonry sealer                          | 31.13 SF         | \$49.91             | \$8.32   | \$49.91    | \$0.00              | \$0.00                     |
| Prime & paint cold air return (cover)                   | 2.00 EA          | \$67.90             | \$11.32  | \$67.90    | \$0.00              | \$0.00                     |
| Prime & paint cold air return (cover)                   | 3.00 EA          | \$101.83            | \$16.96  | \$101.83   | \$0.00              | \$0.00                     |
| Prime & paint cold air return (cover)                   | 1.00 EA          | \$33.95             | \$5.66   | \$33.95    | \$0.00              | \$0.00                     |
| Prime & paint cold air return (cover)                   | 1.00 EA          | \$33.95             | \$5.66   | \$33.95    | \$0.00              | \$0.00                     |
| Prime & paint cold air return (cover)                   | 1.00 EA          | \$33.95             | \$5.66   | \$33.95    | \$0.00              | \$0.00                     |
| Prime & paint cold air return (cover)                   | 3.00 EA          | \$101.85            | \$16.98  | \$101.85   | \$0.00              | \$0.00                     |
| Prime & paint cold air return (cover)                   | 1.00 EA          | \$33.95             | \$5.66   | \$33.95    | \$0.00              | \$0.00                     |
| Seal & paint closet shelving - single shelf             | 1.00 EA          | \$104.59            | \$17.42  | \$104.59   | \$0.00              | \$0.00                     |
| Stain & finish column                                   | 24.00 LF         | \$300.72            | \$50.12  | \$300.72   | \$0.00              | \$0.00                     |
| Paint crown molding - two coats                         | 167.74 LF        | \$506.87            | \$84.48  | \$506.87   | \$0.00              | \$0.00                     |
| Paint crown molding - two coats                         | 80.61 LF         | \$243.59            | \$40.60  | \$243.59   | \$0.00              | \$0.00                     |
| Seal (1 coat) & paint (2 coats)crown molding, oversized | 63.50 LF         | \$303.71            | \$50.62  | \$303.71   | \$0.00              | \$0.00                     |
| Stain & finish crown molding                            | 340.73 LF        | \$1,147.16          | \$191.20 | \$1,147.16 | \$0.00              | \$0.00                     |
| Stain & finish crown molding                            | 193.19 LF        | \$650.44            | \$108.42 | \$650.44   | \$0.00              | \$0.00                     |
| Stain & finish crown molding                            | 115.12 LF        | \$387.58            | \$64.60  | \$387.58   | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 2.00 EA          | \$147.66            | \$24.64  | \$147.66   | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 21.00 EA         | \$1,550.14          | \$258.40 | \$1,550.14 | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 14.00 EA         | \$1,033.40          | \$172.24 | \$1,033.40 | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 6.00 EA          | \$442.89            | \$73.82  | \$442.89   | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 6.00 EA          | \$442.89            | \$73.82  | \$442.89   | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 2.00 EA          | \$147.62            | \$24.60  | \$147.62   | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 4.00 EA          | \$295.27            | \$49.22  | \$295.27   | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 8.00 EA          | \$590.51            | \$98.42  | \$590.51   | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 4.00 EA          | \$295.27            | \$49.22  | \$295.27   | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 2.00 EA          | \$147.62            | \$24.60  | \$147.62   | \$0.00              | \$0.00                     |
| Paint door slab only - 2 coats (per side)               | 2.00 EA          | \$147.62            | \$24.60  | \$147.62   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - 2 coats (per side)      | 18.00 EA         | \$1,125.65          | \$187.64 | \$1,125.65 | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - 2 coats (per side)      | 5.00 EA          | \$312.67            | \$52.12  | \$312.67   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - 2 coats (per            | 2.00 EA          | \$125.08            | \$20.86  | \$125.08   | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 77

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P    | ACV        | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|------------------------------------------------------------|------------------|---------------------|----------|------------|---------------------|----------------------------|
| <b>PNT PAINTING</b>                                        |                  |                     |          |            |                     |                            |
| side)                                                      |                  |                     |          |            |                     |                            |
| Paint door/window trim & jamb - 2 coats (per side)         | 2.00 EA          | \$125.08            | \$20.86  | \$125.08   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - 2 coats (per side)         | 3.00 EA          | \$187.59            | \$31.26  | \$187.59   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 1.00 EA          | \$73.56             | \$12.26  | \$73.56    | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 18.00 EA         | \$1,324.17          | \$220.70 | \$1,324.17 | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 9.00 EA          | \$662.10            | \$110.36 | \$662.10   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 7.00 EA          | \$514.95            | \$85.82  | \$514.95   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 1.00 EA          | \$73.56             | \$12.26  | \$73.56    | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 9.00 EA          | \$662.10            | \$110.36 | \$662.10   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 9.00 EA          | \$662.10            | \$110.36 | \$662.10   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 2.00 EA          | \$147.13            | \$24.52  | \$147.13   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 11.00 EA         | \$809.20            | \$134.86 | \$809.20   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 2.00 EA          | \$147.13            | \$24.52  | \$147.13   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 4.00 EA          | \$294.26            | \$49.04  | \$294.26   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 7.00 EA          | \$514.95            | \$85.82  | \$514.95   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 11.00 EA         | \$809.20            | \$134.86 | \$809.20   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 1.00 EA          | \$73.56             | \$12.26  | \$73.56    | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 6.00 EA          | \$441.38            | \$73.56  | \$441.38   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 4.00 EA          | \$294.26            | \$49.04  | \$294.26   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 13.00 EA         | \$956.35            | \$159.40 | \$956.35   | \$0.00              | \$0.00                     |
| Paint door/window trim & jamb - Large - 2 coats (per side) | 2.00 EA          | \$147.13            | \$24.52  | \$147.13   | \$0.00              | \$0.00                     |
| Prime & paint exterior fascia - wood, 6" - 8" wide         | 571.00 LF        | \$2,436.34          | \$406.06 | \$2,436.34 | \$0.00              | \$0.00                     |
| Painting - Faux (special effects) - 3 part                 | 765.59 SF        | \$4,734.28          | \$789.04 | \$4,734.28 | \$0.00              | \$0.00                     |
| Stain & finish full height cabinetry - inside and out      | 13.50 LF         | \$2,364.68          | \$394.12 | \$2,364.68 | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 78

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                   | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P    | ACV        | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|---------------------------------------------------------------|------------------|---------------------|----------|------------|---------------------|----------------------------|
| <b>PNT PAINTING</b>                                           |                  |                     |          |            |                     |                            |
| Prime & paint French door slab only - exterior (per side)     | 13.00 EA         | \$2,648.46          | \$441.40 | \$2,648.46 | \$0.00              | \$0.00                     |
| Prime & paint French door slab only - exterior (per side)     | 4.00 EA          | \$814.91            | \$135.82 | \$814.91   | \$0.00              | \$0.00                     |
| Prime & paint French door slab only - exterior (per side)     | 2.00 EA          | \$407.45            | \$67.90  | \$407.45   | \$0.00              | \$0.00                     |
| Prime & paint French door slab only - exterior (per side)     | 8.00 EA          | \$1,629.83          | \$271.64 | \$1,629.83 | \$0.00              | \$0.00                     |
| Prime & paint French door slab only - exterior (per side)     | 2.00 EA          | \$407.45            | \$67.90  | \$407.45   | \$0.00              | \$0.00                     |
| Prime & paint French door slab only - exterior (per side)     | 12.00 EA         | \$2,444.74          | \$407.46 | \$2,444.74 | \$0.00              | \$0.00                     |
| Prime & paint French door slab only - exterior (per side)     | 12.00 EA         | \$2,444.74          | \$407.46 | \$2,444.74 | \$0.00              | \$0.00                     |
| Prime & paint gutter / downspout                              | 711.00 LF        | \$2,321.86          | \$386.98 | \$2,321.86 | \$0.00              | \$0.00                     |
| Seal & paint cabinetry - lower - inside and out               | 22.75 LF         | \$2,101.27          | \$350.22 | \$2,101.27 | \$0.00              | \$0.00                     |
| Stain & finish cabinetry - lower - inside and out             | 42.08 LF         | \$5,508.38          | \$918.06 | \$5,508.38 | \$0.00              | \$0.00                     |
| Stain & finish paneling                                       | 35.00 SF         | \$112.68            | \$18.78  | \$112.68   | \$0.00              | \$0.00                     |
| Seal {V} w/latex based stain blocker - one coat               | 2,973.65 SF      | \$3,638.00          | \$606.36 | \$3,638.00 | \$0.00              | \$0.00                     |
| Seal the surface area w/latex based stain blocker - one coat  | 120.00 SF        | \$145.36            | \$24.22  | \$145.36   | \$0.00              | \$0.00                     |
| Sand wood - exterior                                          | 576.00 SF        | \$2,673.94          | \$445.66 | \$2,673.94 | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls             | 751.40 SF        | \$1,398.40          | \$233.06 | \$1,398.40 | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 313.47 SF        | \$583.40            | \$97.24  | \$583.40   | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 250.20 SF        | \$465.64            | \$77.60  | \$465.64   | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls             | 439.55 SF        | \$818.04            | \$136.34 | \$818.04   | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 132.81 SF        | \$247.18            | \$41.20  | \$247.18   | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls             | 551.15 SF        | \$1,025.74          | \$170.96 | \$1,025.74 | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 152.15 SF        | \$283.17            | \$47.20  | \$283.17   | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 394.79 SF        | \$734.74            | \$122.46 | \$734.74   | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 361.44 SF        | \$672.67            | \$112.12 | \$672.67   | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls             | 718.65 SF        | \$1,337.45          | \$222.90 | \$1,337.45 | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 247.33 SF        | \$460.30            | \$76.72  | \$460.30   | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 381.12 SF        | \$709.30            | \$118.22 | \$709.30   | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 79

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                   | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P              | ACV                | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|---------------------------------------------------------------|------------------|---------------------|--------------------|--------------------|---------------------|----------------------------|
| <b>PNT PAINTING</b>                                           |                  |                     |                    |                    |                     |                            |
| Seal/prime (1 coat) then paint (1 coat) the walls             | 599.71 SF        | \$1,116.11          | \$186.02           | \$1,116.11         | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 242.51 SF        | \$451.33            | \$75.22            | \$451.33           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 435.96 SF        | \$811.35            | \$135.22           | \$811.35           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 249.11 SF        | \$463.61            | \$77.26            | \$463.61           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls             | 964.23 SF        | \$1,794.52          | \$299.10           | \$1,794.52         | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 354.77 SF        | \$660.25            | \$110.04           | \$660.25           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls             | 575.32 SF        | \$1,070.70          | \$178.44           | \$1,070.70         | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 120.02 SF        | \$223.36            | \$37.22            | \$223.36           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls             | 670.25 SF        | \$1,247.39          | \$207.90           | \$1,247.39         | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 520.51 SF        | \$968.72            | \$161.46           | \$968.72           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 539.42 SF        | \$1,003.90          | \$167.32           | \$1,003.90         | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 810.89 SF        | \$1,509.15          | \$251.54           | \$1,509.15         | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 78.71 SF         | \$146.50            | \$24.42            | \$146.50           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 588.86 SF        | \$1,095.93          | \$182.66           | \$1,095.93         | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls and ceiling | 232.13 SF        | \$432.03            | \$72.02            | \$432.03           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the walls             | 428.11 SF        | \$796.76            | \$132.80           | \$796.76           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 622.81 SF        | \$1,159.10          | \$193.18           | \$1,159.10         | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (1 coat) the ceiling           | 328.62 SF        | \$611.60            | \$101.94           | \$611.60           | \$0.00              | \$0.00                     |
| Seal/prime (1 coat) then paint (2 coats) the walls            | 713.64 SF        | \$1,819.10          | \$303.18           | \$1,819.10         | \$0.00              | \$0.00                     |
| Seal & paint cabinetry - upper - inside and out               | 14.83 LF         | \$1,170.88          | \$195.16           | \$1,170.88         | \$0.00              | \$0.00                     |
| Stain & finish cabinetry - upper - inside and out             | 18.67 LF         | \$2,106.03          | \$351.00           | \$2,106.03         | \$0.00              | \$0.00                     |
| Stain & finish vanity - inside and out                        | 3.83 LF          | \$431.71            | \$71.96            | \$431.71           | \$0.00              | \$0.00                     |
| Stain & finish vanity - inside and out                        | 5.17 LF          | \$582.73            | \$97.12            | \$582.73           | \$0.00              | \$0.00                     |
| Exterior - paint two coats                                    | 576.00 SF        | \$1,293.13          | \$215.52           | \$1,293.13         | \$0.00              | \$0.00                     |
| Prime & paint door slab only - exterior (per side)            | 6.00 EA          | \$0.00              | \$0.00             | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL PAINTING</b>                                         |                  | <b>\$92,773.14</b>  | <b>\$15,462.54</b> | <b>\$92,773.14</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>RFG ROOFING</b>                                            |                  |                     |                    |                    |                     |                            |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 80



## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                  | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P              | ACV                 | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|--------------------------------------------------------------|------------------|---------------------|--------------------|---------------------|---------------------|----------------------------|
| <b>RFG ROOFING</b>                                           |                  |                     |                    |                     |                     |                            |
| Roofing (Bid Item) Decorative Mortar Build up for Ridge Tile | 465.00 EA        | \$13,950.00         | \$2,325.00         | \$13,950.00         | \$0.00              | \$0.00                     |
| Modified bitumen roof - self-adhering                        | 3.67 SQ          | \$2,552.67          | \$425.44           | \$2,552.67          | \$0.00              | \$0.00                     |
| Digital satellite system - Detach & reset                    | 1.00 EA          | \$72.35             | \$12.06            | \$72.35             | \$0.00              | \$0.00                     |
| Drip edge                                                    | 555.00 LF        | \$2,957.19          | \$492.88           | \$2,957.19          | \$0.00              | \$0.00                     |
| Chimney flashing - average (32" x 36")                       | 4.00 EA          | \$3,596.06          | \$599.34           | \$3,596.06          | \$0.00              | \$0.00                     |
| Counterflashing - Apron flashing                             | 38.00 LF         | \$850.33            | \$141.72           | \$850.33            | \$0.00              | \$0.00                     |
| Flashing - L flashing - color finish                         | 79.00 LF         | \$803.29            | \$133.88           | \$803.29            | \$0.00              | \$0.00                     |
| Flashing - pipe jack - 6"                                    | 11.00 EA         | \$1,333.35          | \$222.24           | \$1,333.35          | \$0.00              | \$0.00                     |
| Additional charge for high roof (2 stories or greater)       | 54.56 SQ         | \$2,572.40          | \$428.74           | \$2,572.40          | \$0.00              | \$0.00                     |
| Hip / Ridge / Rake cap - tile roofing                        | 465.00 LF        | \$9,903.58          | \$1,650.60         | \$9,903.58          | \$0.00              | \$0.00                     |
| Step flashing                                                | 123.00 LF        | \$2,732.49          | \$455.42           | \$2,732.49          | \$0.00              | \$0.00                     |
| Tile roofing - Clay - Barrel (mission) tile                  | 58.00 SQ         | \$86,805.18         | \$14,467.52        | \$86,805.18         | \$0.00              | \$0.00                     |
| Valley metal - (W) profile                                   | 162.59 LF        | \$2,098.46          | \$349.74           | \$2,098.46          | \$0.00              | \$0.00                     |
| <b>TOTAL ROOFING</b>                                         |                  | <b>\$130,227.35</b> | <b>\$21,704.58</b> | <b>\$130,227.35</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>SCF SCAFFOLDING</b>                                       |                  |                     |                    |                     |                     |                            |
| Scaffold - per section (per month)                           | 166.00 MO        | \$22,491.68         | \$3,748.62         | \$22,491.68         | \$0.00              | \$0.00                     |
| Fall protection harness and lanyard (per week)               | 10.00 WK         | \$264.00            | \$44.00            | \$264.00            | \$0.00              | \$0.00                     |
| Labor to set up and take down scaffold - per section         | 83.00 EA         | \$4,434.20          | \$739.04           | \$4,434.20          | \$0.00              | \$0.00                     |
| <b>TOTAL SCAFFOLDING</b>                                     |                  | <b>\$27,189.88</b>  | <b>\$4,531.66</b>  | <b>\$27,189.88</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>SFG SOFFIT, FASCIA, &amp; GUTTER</b>                      |                  |                     |                    |                     |                     |                            |
| Detach & Reset Gutter guard/screen - Premium grade           | 511.00 LF        | \$8,259.81          | \$1,376.64         | \$8,259.81          | \$0.00              | \$0.00                     |
| Gutter / downspout - Detach & reset                          | 711.00 LF        | \$5,170.40          | \$861.74           | \$5,170.40          | \$0.00              | \$0.00                     |
| <b>TOTAL SOFFIT, FASCIA, &amp; GUTTER</b>                    |                  | <b>\$13,430.21</b>  | <b>\$2,238.38</b>  | <b>\$13,430.21</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>SPE SPECIALTY ITEMS</b>                                   |                  |                     |                    |                     |                     |                            |
| Inset BBQ grill                                              | 1.00 EA          | \$10,504.51         | \$1,750.76         | \$10,504.51         | \$0.00              | \$0.00                     |
| Landscape fountain - Small (4' diameter)                     | 0.50 EA          | \$0.00              | \$0.00             | \$0.00              | \$0.00              | \$0.00                     |
| Sauna - interior - 4' x 6'                                   | 1.00 EA          | \$0.00              | \$0.00             | \$0.00              | \$0.00              | \$0.00                     |
| In-wall / In-ceiling speaker - Detach & reset                | 8.00 EA          | \$265.36            | \$44.24            | \$265.36            | \$0.00              | \$0.00                     |
| Built-in theater speaker system - Deluxe grade               | 1.00 EA          | \$0.00              | \$0.00             | \$0.00              | \$0.00              | \$0.00                     |
| <b>TOTAL SPECIALTY ITEMS</b>                                 |                  | <b>\$10,769.87</b>  | <b>\$1,795.00</b>  | <b>\$10,769.87</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>STU STUCCO &amp; EXTERIOR PLASTER</b>                     |                  |                     |                    |                     |                     |                            |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 81

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                          | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P              | ACV                | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|------------------------------------------------------|------------------|---------------------|--------------------|--------------------|---------------------|----------------------------|
| <b>STU STUCCO &amp; EXTERIOR PLASTER</b>             |                  |                     |                    |                    |                     |                            |
| Metal lath & stucco                                  | 100.00 SF        | \$1,140.94          | \$190.16           | \$1,140.94         | \$0.00              | \$0.00                     |
| Stucco color coat (Redash) - Synthetic               | 7,097.54 SF      | \$92,246.44         | \$15,374.40        | \$92,246.44        | \$0.00              | \$0.00                     |
| Stucco repair around doors, windows, etc - 2nd floor | 161.00 LF        | \$6,500.15          | \$1,083.36         | \$6,500.15         | \$0.00              | \$0.00                     |
| <b>TOTAL STUCCO &amp; EXTERIOR PLASTER</b>           |                  | <b>\$99,887.53</b>  | <b>\$16,647.92</b> | <b>\$99,887.53</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>TIL TILE</b>                                      |                  |                     |                    |                    |                     |                            |
| Ceramic/porcelain tile - High grade                  | 58.13 SF         | \$1,770.94          | \$295.16           | \$1,770.94         | \$0.00              | \$0.00                     |
| Ceramic/porcelain tile - Premium grade               | 2.00 SF          | \$75.81             | \$12.64            | \$75.81            | \$0.00              | \$0.00                     |
| Ceramic tile - bullnose - 3/4" x 6" - High grade     | 8.66 LF          | \$169.56            | \$28.28            | \$169.56           | \$0.00              | \$0.00                     |
| Travertine tile - bullnose - 2" x 6" - Premium grade | 25.93 LF         | \$0.00              | \$0.00             | \$0.00             | \$0.00              | \$0.00                     |
| Mortar bed for tile                                  | 138.33 SF        | \$0.00              | \$0.00             | \$0.00             | \$0.00              | \$0.00                     |
| Add-on for tile backsplash installation              | 4.00 SF          | \$132.96            | \$22.16            | \$132.96           | \$0.00              | \$0.00                     |
| Add-on for tile backsplash installation              | 58.13 SF         | \$1,932.24          | \$322.04           | \$1,932.24         | \$0.00              | \$0.00                     |
| Add-on for diagonal tile installation                | 12.96 SF         | \$0.00              | \$0.00             | \$0.00             | \$0.00              | \$0.00                     |
| Add-on for tile feature strip - Premium grade        | 25.93 LF         | \$0.00              | \$0.00             | \$0.00             | \$0.00              | \$0.00                     |
| Tile / Cultured Marble Installer - per hour          | 8.00 HR          | \$1,634.40          | \$272.40           | \$1,634.40         | \$0.00              | \$0.00                     |
| Mosaic - ceramic/porcelain tile - Premium grade      | 8.75 SF          | \$453.46            | \$75.58            | \$453.46           | \$0.00              | \$0.00                     |
| Seal grout on tile wall                              | 45.13 SF         | \$142.85            | \$23.80            | \$142.85           | \$0.00              | \$0.00                     |
| Seal grout on tile wall                              | 58.13 SF         | \$184.03            | \$30.68            | \$184.03           | \$0.00              | \$0.00                     |
| Seal grout on tile wall                              | 197.70 SF        | \$625.86            | \$104.32           | \$625.86           | \$0.00              | \$0.00                     |
| Seal grout on tile wall                              | 343.54 SF        | \$1,087.56          | \$181.28           | \$1,087.56         | \$0.00              | \$0.00                     |
| Tile/stone sealer                                    | 101.56 SF        | \$190.76            | \$31.80            | \$190.76           | \$0.00              | \$0.00                     |
| Tile shower - 101 to 120 SF - High grade             | 1.00 EA          | \$0.00              | \$0.00             | \$0.00             | \$0.00              | \$0.00                     |
| Travertine tile - Premium grade                      | 394.58 SF        | \$0.00              | \$0.00             | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL TILE</b>                                    |                  | <b>\$8,400.43</b>   | <b>\$1,400.14</b>  | <b>\$8,400.43</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>TMP TEMPORARY REPAIRS</b>                         |                  |                     |                    |                    |                     |                            |
| Temporary fencing - 5-8 months (per month)           | 1.00 EA          | \$0.00              | \$0.00             | \$0.00             | \$0.00              | \$0.00                     |
| Temporary power usage (per month)                    | 1.00 MO          | \$0.00              | \$0.00             | \$0.00             | \$0.00              | \$0.00                     |
| Temporary toilet (per month)                         | 5.00 MO          | \$1,350.00          | \$225.00           | \$1,350.00         | \$0.00              | \$0.00                     |
| <b>TOTAL TEMPORARY REPAIRS</b>                       |                  | <b>\$1,350.00</b>   | <b>\$225.00</b>    | <b>\$1,350.00</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>WDP WINDOWS - SLIDING PATIO DOORS</b>             |                  |                     |                    |                    |                     |                            |
| Patio door screen, 36" wide                          | 3.00 EA          | \$370.32            | \$61.72            | \$370.32           | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 82

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION                                                   | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P             | ACV                | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|---------------------------------------------------------------|------------------|---------------------|-------------------|--------------------|---------------------|----------------------------|
| <b>WDP    WINDOWS - SLIDING PATIO DOORS</b>                   |                  |                     |                   |                    |                     |                            |
| Patio door screen, 36" wide                                   | 4.00 EA          | \$493.75            | \$82.28           | \$493.75           | \$0.00              | \$0.00                     |
| <b>TOTAL WINDOWS - SLIDING PATIO DOORS</b>                    |                  | <b>\$864.07</b>     | <b>\$144.00</b>   | <b>\$864.07</b>    | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>WDR    WINDOW REGLAZING &amp; REPAIR</b>                   |                  |                     |                   |                    |                     |                            |
| Lube/recondition sliding glass door                           | 5.00 EA          | \$1,275.17          | \$212.56          | \$1,275.17         | \$0.00              | \$0.00                     |
| Lube/recondition operable window                              | 2.00 EA          | \$390.42            | \$65.08           | \$390.42           | \$0.00              | \$0.00                     |
| Lube/recondition operable window                              | 46.00 EA         | \$8,979.66          | \$1,496.68        | \$8,979.66         | \$0.00              | \$0.00                     |
| Window screen, 10 - 16 SF                                     | 19.00 EA         | \$1,525.93          | \$254.30          | \$1,525.93         | \$0.00              | \$0.00                     |
| Window screen, 1 - 9 SF                                       | 2.00 EA          | \$117.84            | \$19.64           | \$117.84           | \$0.00              | \$0.00                     |
| Window screen, 1 - 9 SF                                       | 2.00 EA          | \$117.96            | \$19.68           | \$117.96           | \$0.00              | \$0.00                     |
| Window screen, 1 - 9 SF                                       | 17.00 EA         | \$1,001.67          | \$166.96          | \$1,001.67         | \$0.00              | \$0.00                     |
| <b>TOTAL WINDOW REGLAZING &amp; REPAIR</b>                    |                  | <b>\$13,408.65</b>  | <b>\$2,234.90</b> | <b>\$13,408.65</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>WDS    WINDOWS - SKYLIGHTS</b>                             |                  |                     |                   |                    |                     |                            |
| Roof window (skylight), 9.1 - 10 sf                           | 1.00 EA          | \$1,570.67          | \$261.78          | \$1,570.67         | \$0.00              | \$0.00                     |
| <b>TOTAL WINDOWS - SKYLIGHTS</b>                              |                  | <b>\$1,570.67</b>   | <b>\$261.78</b>   | <b>\$1,570.67</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>WDT    WINDOW TREATMENT</b>                                |                  |                     |                   |                    |                     |                            |
| Window blind - fabric/woven - 14.1 to 20 SF - High grade      | 3.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Detach & Reset Window drapery - hardware                      | 22.00 EA         | \$1,355.38          | \$225.90          | \$1,355.38         | \$0.00              | \$0.00                     |
| Detach & Reset Window drapery - hardware                      | 6.00 EA          | \$369.64            | \$61.60           | \$369.64           | \$0.00              | \$0.00                     |
| Detach & Reset Window drapery - hardware - Small              | 4.00 EA          | \$246.42            | \$41.06           | \$246.42           | \$0.00              | \$0.00                     |
| Detach & Reset Window drapery - hardware - Small              | 1.00 EA          | \$61.60             | \$10.26           | \$61.60            | \$0.00              | \$0.00                     |
| Detach & Reset Window drapery - hardware - single rod - Large | 4.00 EA          | \$246.42            | \$41.06           | \$246.42           | \$0.00              | \$0.00                     |
| Window shade - roll up                                        | 2.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Window shade - roll up - Large                                | 1.00 EA          | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| Motorized blackout screen                                     | 252.00 SF        | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |
| <b>TOTAL WINDOW TREATMENT</b>                                 |                  | <b>\$2,279.46</b>   | <b>\$379.88</b>   | <b>\$2,279.46</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>WPR    WALLPAPER</b>                                       |                  |                     |                   |                    |                     |                            |
| Wallpaper - Premium grade                                     | 881.37 SF        | \$4,588.21          | \$764.70          | \$4,588.21         | \$0.00              | \$0.00                     |
| Wallpaper - Premium grade                                     | 1,383.70 SF      | \$7,203.24          | \$1,200.54        | \$7,203.24         | \$0.00              | \$0.00                     |
| Wallpaper - Premium grade                                     | 39.50 SF         | \$205.62            | \$34.26           | \$205.62           | \$0.00              | \$0.00                     |
| Wallpaper - Premium grade                                     | 669.08 SF        | \$3,483.09          | \$580.52          | \$3,483.09         | \$0.00              | \$0.00                     |
| Wallpaper - Premium grade                                     | 1,387.28 SF      | \$0.00              | \$0.00            | \$0.00             | \$0.00              | \$0.00                     |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 83

## Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

| DESCRIPTION             | LINE ITEM<br>QTY | REPL. COST<br>TOTAL | GCO&P               | ACV                 | NON-REC.<br>DEPREC. | MAX ADDL.<br>AMT<br>AVAIL. |
|-------------------------|------------------|---------------------|---------------------|---------------------|---------------------|----------------------------|
| <b>WPR    WALLPAPER</b> |                  |                     |                     |                     |                     |                            |
| Prep wall for wallpaper | 881.37 SF        | \$1,163.41          | \$193.90            | \$1,163.41          | \$0.00              | \$0.00                     |
| Prep wall for wallpaper | 1,383.70 SF      | \$1,826.49          | \$304.42            | \$1,826.49          | \$0.00              | \$0.00                     |
| Prep wall for wallpaper | 39.50 SF         | \$52.15             | \$8.70              | \$52.15             | \$0.00              | \$0.00                     |
| Prep wall for wallpaper | 669.08 SF        | \$883.19            | \$147.20            | \$883.19            | \$0.00              | \$0.00                     |
| Prep wall for wallpaper | 1,387.28 SF      | \$0.00              | \$0.00              | \$0.00              | \$0.00              | \$0.00                     |
| <b>TOTAL WALLPAPER</b>  |                  | <b>\$19,405.40</b>  | <b>\$3,234.24</b>   | <b>\$19,405.40</b>  | <b>\$0.00</b>       | <b>\$0.00</b>              |
| <b>TOTALS</b>           |                  | <b>\$612,998.89</b> | <b>\$102,228.80</b> | <b>\$612,998.89</b> | <b>\$0.00</b>       | <b>\$0.00</b>              |

Note: Slight variances may be found within report sections due to rounding

Date: 9/5/2025 6:16 AM

Page: 84

Recap of Taxes, Overhead and Profit

|            | GC Overhead (10%) | GC Profit (10%) | Material Sales Tax (9.5%) | Storage Rental Tax (9.5%) |
|------------|-------------------|-----------------|---------------------------|---------------------------|
| Line Items | 51,083.57         | 51,083.57       | 10,348.64                 | 0.00                      |
| Permit     | 30.83             | 30.83           | 0.00                      | 0.00                      |
| Total      | 51,114.40         | 51,114.40       | 10,348.64                 | 0.00                      |

# State Farm

KALYVAS, JAMES

75-79F9-18M3

## Recap by Room

### Estimate: 75-79F9-18M3

#### General

|                                            |           |                  |              |
|--------------------------------------------|-----------|------------------|--------------|
|                                            |           | <b>41,506.64</b> | <b>8.29%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 41,506.64        |              |

#### Area: Main Structure

#### Area: First Floor

|                                            |           |          |              |
|--------------------------------------------|-----------|----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 1,399.19 | <b>0.28%</b> |
|--------------------------------------------|-----------|----------|--------------|

#### Foyer/Staircase

|                                            |           |          |              |
|--------------------------------------------|-----------|----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 6,116.32 | <b>1.22%</b> |
|--------------------------------------------|-----------|----------|--------------|

#### Den

|                                            |           |           |              |
|--------------------------------------------|-----------|-----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 10,966.22 | <b>2.19%</b> |
|--------------------------------------------|-----------|-----------|--------------|

#### Bathroom

|                                            |           |        |              |
|--------------------------------------------|-----------|--------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 846.87 | <b>0.17%</b> |
|--------------------------------------------|-----------|--------|--------------|

#### Garage Hall

|                                            |           |          |              |
|--------------------------------------------|-----------|----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 1,427.09 | <b>0.29%</b> |
|--------------------------------------------|-----------|----------|--------------|

#### Dining Room

|                                            |           |          |              |
|--------------------------------------------|-----------|----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 3,602.19 | <b>0.72%</b> |
|--------------------------------------------|-----------|----------|--------------|

#### Pantry

|                                            |           |        |              |
|--------------------------------------------|-----------|--------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 478.15 | <b>0.10%</b> |
|--------------------------------------------|-----------|--------|--------------|

#### Family Room

|                                            |           |           |              |
|--------------------------------------------|-----------|-----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 10,493.00 | <b>2.10%</b> |
|--------------------------------------------|-----------|-----------|--------------|

#### Kitchen

|                                            |           |           |              |
|--------------------------------------------|-----------|-----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 20,392.49 | <b>4.07%</b> |
|--------------------------------------------|-----------|-----------|--------------|

#### Office

|                                            |           |           |              |
|--------------------------------------------|-----------|-----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 12,371.20 | <b>2.47%</b> |
|--------------------------------------------|-----------|-----------|--------------|

#### Office Bathroom

|                                            |           |          |              |
|--------------------------------------------|-----------|----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 3,149.77 | <b>0.63%</b> |
|--------------------------------------------|-----------|----------|--------------|

#### Garage

|                                            |           |           |              |
|--------------------------------------------|-----------|-----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 12,343.27 | <b>2.47%</b> |
|--------------------------------------------|-----------|-----------|--------------|

#### Laundry Room

|                                            |           |          |              |
|--------------------------------------------|-----------|----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 4,114.69 | <b>0.82%</b> |
|--------------------------------------------|-----------|----------|--------------|

---

#### Area Subtotal: First Floor

|                                            |           |                  |               |
|--------------------------------------------|-----------|------------------|---------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | <b>87,700.45</b> | <b>17.52%</b> |
|--------------------------------------------|-----------|------------------|---------------|

#### Area: Second Floor

|                                            |           |          |              |
|--------------------------------------------|-----------|----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 1,096.17 | <b>0.22%</b> |
|--------------------------------------------|-----------|----------|--------------|

#### Landing

|                                            |           |          |              |
|--------------------------------------------|-----------|----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 8,534.20 | <b>1.71%</b> |
|--------------------------------------------|-----------|----------|--------------|

#### Area: Bedroom 1

#### Bedroom 1

|                                            |           |           |              |
|--------------------------------------------|-----------|-----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 13,521.90 | <b>2.70%</b> |
|--------------------------------------------|-----------|-----------|--------------|

#### Bed1 Bath

|                                            |           |          |              |
|--------------------------------------------|-----------|----------|--------------|
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 1,519.74 | <b>0.30%</b> |
|--------------------------------------------|-----------|----------|--------------|

---

# State Farm

KALYVAS, JAMES

75-79F9-18M3

|                                            |           |                   |               |
|--------------------------------------------|-----------|-------------------|---------------|
| <b>Area Subtotal: Bedroom 1</b>            |           | <b>15,041.64</b>  | <b>3.01%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 15,041.64         |               |
| <b>Area: Bedroom 2</b>                     |           |                   |               |
| <b>Bedroom 2</b>                           |           | <b>6,448.31</b>   | <b>1.29%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 6,448.31          |               |
| <b>Bed2 Bath</b>                           |           | <b>1,455.04</b>   | <b>0.29%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 1,455.04          |               |
| <b>Area Subtotal: Bedroom 2</b>            |           | <b>7,903.35</b>   | <b>1.58%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 7,903.35          |               |
| <b>Area: Bedroom 3</b>                     |           |                   |               |
| <b>Bedroom 3</b>                           |           | <b>5,678.93</b>   | <b>1.13%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 5,678.93          |               |
| <b>Bed3 Bath</b>                           |           | <b>1,473.04</b>   | <b>0.29%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 1,473.04          |               |
| <b>Area Subtotal: Bedroom 3</b>            |           | <b>7,151.97</b>   | <b>1.43%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 7,151.97          |               |
| <b>Area: Master Suite</b>                  |           |                   |               |
| <b>Master Bedroom</b>                      |           | <b>15,002.60</b>  | <b>3.00%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 15,002.60         |               |
| <b>Master Bath</b>                         |           | <b>13,770.31</b>  | <b>2.75%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 13,770.31         |               |
| <b>Master Closet</b>                       |           | <b>3,547.97</b>   | <b>0.71%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 3,547.97          |               |
| <b>Area Subtotal: Master Suite</b>         |           | <b>32,320.88</b>  | <b>6.46%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 32,320.88         |               |
| <b>Area: Guest Suite</b>                   |           |                   |               |
| <b>Stairwell</b>                           |           | <b>2,285.52</b>   | <b>0.46%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 2,285.52          |               |
| <b>Guest Bedroom</b>                       |           | <b>5,773.19</b>   | <b>1.15%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 5,773.19          |               |
| <b>Guest Bathroom</b>                      |           | <b>1,288.54</b>   | <b>0.26%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 1,288.54          |               |
| <b>Area Subtotal: Guest Suite</b>          |           | <b>9,347.25</b>   | <b>1.87%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 9,347.25          |               |
| <b>Area Subtotal: Second Floor</b>         |           | <b>81,395.46</b>  | <b>16.26%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 81,395.46         |               |
| <b>Area: Roof</b>                          |           |                   |               |
| <b>ROOF1</b>                               |           | <b>136,127.46</b> | <b>27.20%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke | 100.00% = | 136,127.46        |               |

## State Farm

KALYVAS, JAMES

75-79F9-18M3

|                                                      |           |  |                   |                |
|------------------------------------------------------|-----------|--|-------------------|----------------|
| <b>Area Subtotal: Roof</b>                           |           |  | <b>136,127.46</b> | <b>27.20%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | 100.00% = |  | 136,127.46        |                |
| <b>Area: Exterior</b>                                |           |  |                   |                |
| <b>Ext_Surfaces</b>                                  |           |  | <b>116,337.79</b> | <b>23.25%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | 100.00% = |  | 116,337.79        |                |
| <b>Area Subtotal: Exterior</b>                       |           |  | <b>116,337.79</b> | <b>23.25%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | 100.00% = |  | 116,337.79        |                |
| <b>Area Subtotal: Main Structure</b>                 |           |  | <b>421,561.16</b> | <b>84.23%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | 100.00% = |  | 421,561.16        |                |
| <b>Electrical</b>                                    |           |  | <b>3,104.78</b>   | <b>0.62%</b>   |
| Coverage: Coverage A - Dwelling - 39 Smoke           | 100.00% = |  | 3,104.78          |                |
| <b>Area: Other Structures</b>                        |           |  |                   |                |
| <b>Hardscapes and walkways</b>                       |           |  | <b>34,310.53</b>  | <b>6.86%</b>   |
| Coverage: Coverage A - Dwelling - 39 Smoke           | 9.55% =   |  | 3,277.44          |                |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | 90.45% =  |  | 31,033.09         |                |
| <b>Area Subtotal: Other Structures</b>               |           |  | <b>34,310.53</b>  | <b>6.86%</b>   |
| Coverage: Coverage A - Dwelling - 39 Smoke           | 9.55% =   |  | 3,277.44          |                |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | 90.45% =  |  | 31,033.09         |                |
| <b>Subtotal of Areas</b>                             |           |  | <b>500,483.11</b> | <b>100.00%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | 93.80% =  |  | 469,450.02        |                |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | 6.20% =   |  | 31,033.09         |                |
| <b>Total</b>                                         |           |  | <b>500,483.11</b> | <b>100.00%</b> |



State Farm

KALYVAS, JAMES

75-79F9-18M3

Recap by Category

| General Contractor O&P Items                         |   |           |  | Total            | %            |
|------------------------------------------------------|---|-----------|--|------------------|--------------|
| <b>CABINETRY</b>                                     |   |           |  | <b>14,308.60</b> | <b>2.33%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 43.45% =  |  | 6,217.08         |              |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | @ | 56.55% =  |  | 8,091.52         |              |
| <b>CLEANING</b>                                      |   |           |  | <b>30,936.13</b> | <b>5.04%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 30,936.13        |              |
| <b>GENERAL DEMOLITION</b>                            |   |           |  | <b>24,606.30</b> | <b>4.01%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 97.28% =  |  | 23,936.15        |              |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | @ | 2.72% =   |  | 670.15           |              |
| <b>DOORS</b>                                         |   |           |  | <b>1,015.08</b>  | <b>0.17%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 1,015.08         |              |
| <b>DRYWALL</b>                                       |   |           |  | <b>9,682.26</b>  | <b>1.58%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 9,682.26         |              |
| <b>ELECTRICAL</b>                                    |   |           |  | <b>2,869.58</b>  | <b>0.47%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 2,869.58         |              |
| <b>FLOOR COVERING - CARPET</b>                       |   |           |  | <b>21,679.32</b> | <b>3.53%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 21,679.32        |              |
| <b>FLOOR COVERING - STONE</b>                        |   |           |  | <b>2,083.11</b>  | <b>0.34%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 2,083.11         |              |
| <b>FLOOR COVERING - CERAMIC TILE</b>                 |   |           |  | <b>716.95</b>    | <b>0.12%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 716.95           |              |
| <b>FLOOR COVERING - WOOD</b>                         |   |           |  | <b>4,799.68</b>  | <b>0.78%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 4,799.68         |              |
| <b>FINISH CARPENTRY / TRIMWORK</b>                   |   |           |  | <b>2,601.89</b>  | <b>0.42%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 2,601.89         |              |
| <b>FINISH HARDWARE</b>                               |   |           |  | <b>68.11</b>     | <b>0.01%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 68.11            |              |
| <b>FRAMING &amp; ROUGH CARPENTRY</b>                 |   |           |  | <b>1,115.91</b>  | <b>0.18%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 1,115.91         |              |
| <b>HEAT, VENT &amp; AIR CONDITIONING</b>             |   |           |  | <b>8,984.34</b>  | <b>1.46%</b> |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | @ | 100.00% = |  | 8,984.34         |              |
| <b>INSULATION</b>                                    |   |           |  | <b>339.99</b>    | <b>0.06%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 339.99           |              |

State Farm

KALYVAS, JAMES

75-79F9-18M3

| General Contractor O&P Items                         |   |           |  | Total             | %             |
|------------------------------------------------------|---|-----------|--|-------------------|---------------|
| <b>LABOR ONLY</b>                                    |   |           |  | <b>12,913.50</b>  | <b>2.11%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 12,913.50         |               |
| <b>LIGHT FIXTURES</b>                                |   |           |  | <b>2,756.81</b>   | <b>0.45%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 2,756.81          |               |
| <b>MARBLE - CULTURED OR NATURAL</b>                  |   |           |  | <b>619.20</b>     | <b>0.10%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 619.20            |               |
| <b>ORNAMENTAL IRON</b>                               |   |           |  | <b>3,456.46</b>   | <b>0.56%</b>  |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | @ | 100.00% = |  | 3,456.46          |               |
| <b>PLUMBING</b>                                      |   |           |  | <b>9,312.58</b>   | <b>1.52%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 83.08% =  |  | 7,736.96          |               |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | @ | 16.92% =  |  | 1,575.62          |               |
| <b>PAINTING</b>                                      |   |           |  | <b>76,454.42</b>  | <b>12.46%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 76,454.42         |               |
| <b>ROOFING</b>                                       |   |           |  | <b>105,609.11</b> | <b>17.22%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 105,609.11        |               |
| <b>SCAFFOLDING</b>                                   |   |           |  | <b>22,658.22</b>  | <b>3.69%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 22,658.22         |               |
| <b>SOFFIT, FASCIA, &amp; GUTTER</b>                  |   |           |  | <b>11,191.83</b>  | <b>1.82%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 11,191.83         |               |
| <b>SPECIALTY ITEMS</b>                               |   |           |  | <b>8,476.12</b>   | <b>1.38%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 2.61% =   |  | 221.12            |               |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | @ | 97.39% =  |  | 8,255.00          |               |
| <b>STUCCO &amp; EXTERIOR PLASTER</b>                 |   |           |  | <b>82,756.52</b>  | <b>13.49%</b> |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 82,756.52         |               |
| <b>TILE</b>                                          |   |           |  | <b>6,913.69</b>   | <b>1.13%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 6,913.69          |               |
| <b>TEMPORARY REPAIRS</b>                             |   |           |  | <b>1,125.00</b>   | <b>0.18%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 1,125.00          |               |
| <b>WINDOWS - SLIDING PATIO DOORS</b>                 |   |           |  | <b>661.78</b>     | <b>0.11%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 661.78            |               |
| <b>WINDOW REGLAZING &amp; REPAIR</b>                 |   |           |  | <b>10,989.31</b>  | <b>1.79%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 10,989.31         |               |
| <b>WINDOWS - SKYLIGHTS</b>                           |   |           |  | <b>1,210.59</b>   | <b>0.20%</b>  |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 1,210.59          |               |

State Farm

KALYVAS, JAMES

75-79F9-18M3

| General Contractor O&P Items                         |   |           |  | Total             | %              |
|------------------------------------------------------|---|-----------|--|-------------------|----------------|
| <b>WINDOW TREATMENT</b>                              |   |           |  | <b>1,899.58</b>   | <b>0.31%</b>   |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 1,899.58          |                |
| <b>WALLPAPER</b>                                     |   |           |  | <b>15,671.14</b>  | <b>2.55%</b>   |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 15,671.14         |                |
| <b>General Contractor O&amp;P Items Subtotal</b>     |   |           |  | <b>500,483.11</b> | <b>81.60%</b>  |
| <b>Permits and Fees</b>                              |   |           |  | <b>308.24</b>     | <b>0.05%</b>   |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 100.00% = |  | 308.24            |                |
| <b>Material Sales Tax</b>                            |   |           |  | <b>10,348.64</b>  | <b>1.69%</b>   |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 83.22% =  |  | 8,611.66          |                |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | @ | 16.78% =  |  | 1,736.98          |                |
| <b>General Contractor Overhead</b>                   |   |           |  | <b>51,114.40</b>  | <b>8.33%</b>   |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 93.59% =  |  | 47,837.37         |                |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | @ | 6.41% =   |  | 3,277.03          |                |
| <b>General Contractor Profit</b>                     |   |           |  | <b>51,114.40</b>  | <b>8.33%</b>   |
| Coverage: Coverage A - Dwelling - 39 Smoke           | @ | 93.59% =  |  | 47,837.37         |                |
| Coverage: Coverage A - Dwelling Extension - 39 Smoke | @ | 6.41% =   |  | 3,277.03          |                |
| <b>Total</b>                                         |   |           |  | <b>613,368.79</b> | <b>100.00%</b> |

## Time &amp; Material Breakdown

| General Contractor O&P Items                             | Quantity  | Unit Price                 | Total Cost       |
|----------------------------------------------------------|-----------|----------------------------|------------------|
| <b>CABINETRY</b>                                         |           |                            |                  |
| Supplies -                                               |           |                            |                  |
| General purpose cleaning chemical                        | 0.55 GL   | 18.260                     | 10.10*           |
| Garage cabinetry - wall unit - 24" single door - High gr | 3.50 EA   | 134.505                    | 470.79*          |
| Garage cab. - full height, 36" x 18" - High grade        | 4.00 EA   | 359.188                    | 1,436.76*        |
| 4" to 6" buffing pad                                     | 1.00 EA   | 13.000                     | 12.95*           |
| Abrasive honing/polishing powder                         | 0.70 LB   | 35.000                     | 24.46*           |
| Silicone caulk - 10 oz tube                              | 0.41 TB   | 11.991                     | 4.90*            |
| Countertop - granite or marble slab - Premium grade      | 43.08 SF  | 86.440                     | 3,723.67*        |
|                                                          |           | <b>Supplies:</b>           | <b>5,683.63</b>  |
| Contractor Labor -                                       |           |                            |                  |
| Carpenter - Finish, Trim/Cabinet                         | 82.01 HR  | 105.170                    | 8,624.97*        |
|                                                          |           | <b>Labor:</b>              | <b>8,624.97</b>  |
|                                                          |           | <b>CABINETRY Subtotal:</b> | <b>14,308.60</b> |
| <b>CLEANING</b>                                          |           |                            |                  |
| Supplies -                                               |           |                            |                  |
| Sodium bicarbonate (baking soda) 50# bag                 | 34.31 BG  | 55.990                     | 1,920.92*        |
| General purpose cleaning chemical                        | 0.29 GL   | 18.260                     | 5.21*            |
| Silica sand - 100# bag                                   | 99.49 BG  | 17.122                     | 1,703.41*        |
|                                                          |           | <b>Supplies:</b>           | <b>3,629.54</b>  |
| Contractor Labor -                                       |           |                            |                  |
| Cleaning Remediation Technician                          | 209.43 HR | 80.000                     | 16,754.06*       |
| Cleaning Technician                                      | 40.97 HR  | 66.500                     | 2,724.38*        |
|                                                          |           | <b>Labor:</b>              | <b>19,478.44</b> |
| Equipment -                                              |           |                            |                  |
| Soda blaster, compressor, and 100' hose                  | 3.49 DA   | 243.110                    | 847.82*          |
| Pressure washing machine - variable pressure             | 0.36 DA   | 101.164                    | 36.44*           |
| Sand blaster w/hood, compressor, and 100' hose           | 16.38 DA  | 195.000                    | 3,193.89*        |
|                                                          |           | <b>Equipment:</b>          | <b>4,078.15</b>  |
|                                                          |           | <b>Miscellaneous:</b>      | <b>3,750.00</b>  |
|                                                          |           | <b>CLEANING Subtotal:</b>  | <b>30,936.13</b> |
| <b>GENERAL DEMOLITION</b>                                |           |                            |                  |
| Contractor Labor -                                       |           |                            |                  |
| Demolition Laborer                                       | 0.17 HR   | 68.890                     | 11.48*           |
| Demolition Laborer                                       | 1.00 HR   | 68.750                     | 68.51*           |
| Demolition Laborer                                       | 260.62 HR | 68.610                     | 17,881.21*       |
| Plumber                                                  | 0.12 HR   | 140.000                    | 16.23*           |
| Equipment Operator                                       | 1.56 HR   | 100.160                    | 156.50*          |
|                                                          |           | <b>Labor:</b>              | <b>18,133.93</b> |
| Equipment -                                              |           |                            |                  |
| Landfill charge - per ton                                | 29.77 TN  | 95.543                     | 2,844.40*        |
| Dumpster - Approx. 20 yds, 4 ton of debris               | 1.00 LO   | 783.000                    | 783.00           |

# State Farm

KALYVAS, JAMES

75-79F9-18M3

## General Contractor O&P Items

|                                              | Quantity | Unit Price | Total Cost       |
|----------------------------------------------|----------|------------|------------------|
| Dumpster - Approx. 40 yds, 7-8 ton of debris | 2.00 LO  | 1,399.050  | 2,798.10         |
| Single axle dump truck                       | 0.04 WK  | 1,200.000  | 46.87*           |
| <b>Equipment:</b>                            |          |            | <b>6,472.37</b>  |
| <b>GENERAL DEMOLITION Subtotal:</b>          |          |            | <b>24,606.30</b> |

## DOORS

|                                     |         |         |                 |
|-------------------------------------|---------|---------|-----------------|
| Supplies -                          |         |         |                 |
| 6d finish nails (based on 5 lb box) | 0.60 LB | 4.023   | 2.41            |
| Wood shims                          | 0.42 BN | 3.965   | 1.67            |
| <b>Supplies:</b>                    |         |         | <b>4.08</b>     |
| Contractor Labor -                  |         |         |                 |
| Carpenter - Finish, Trim/Cabinet    | 4.73 HR | 105.170 | 497.27*         |
| Overhead Door Installer             | 5.11 HR | 99.910  | 510.12*         |
| <b>Labor:</b>                       |         |         | <b>1,007.39</b> |
| <b>Miscellaneous:</b>               |         |         | <b>3.61</b>     |
| <b>DOORS Subtotal:</b>              |         |         | <b>1,015.08</b> |

## DRYWALL

|                                                       |           |         |                 |
|-------------------------------------------------------|-----------|---------|-----------------|
| Supplies -                                            |           |         |                 |
| Metal corner bead                                     | 12.33 LF  | 0.520   | 6.41            |
| Drywall joint compound - 50 lb box                    | 29.73 BX  | 15.260  | 453.63*         |
| Drywall nails (based on 25 to 50 lb box)              | 0.59 LB   | 2.021   | 1.18*           |
| Drywall screws - grabber - (based on 25 to 50 lb box) | 1.17 LB   | 3.174   | 3.72*           |
| Joint tape - 500' roll                                | 0.19 RL   | 6.978   | 1.36*           |
| Gypsum board, 1/2"                                    | 261.84 SF | 0.480   | 125.68          |
| <b>Supplies:</b>                                      |           |         | <b>591.98</b>   |
| Contractor Labor -                                    |           |         |                 |
| Drywall Installer/Finisher                            | 53.47 HR  | 170.000 | 9,090.28*       |
| <b>Labor:</b>                                         |           |         | <b>9,090.28</b> |
| <b>DRYWALL Subtotal:</b>                              |           |         | <b>9,682.26</b> |

## ELECTRICAL

|                                          |          |         |                 |
|------------------------------------------|----------|---------|-----------------|
| Supplies -                               |          |         |                 |
| Smoke detector - High grade              | 12.00 EA | 72.260  | 867.12          |
| Carbon monoxide detector - High grade    | 2.00 EA  | 62.030  | 124.06          |
| <b>Supplies:</b>                         |          |         | <b>991.18</b>   |
| Contractor Labor -                       |          |         |                 |
| Electrician                              | 12.80 HR | 142.500 | 1,824.04*       |
| <b>Labor:</b>                            |          |         | <b>1,824.04</b> |
| Equipment -                              |          |         |                 |
| Megohmmeter to check electrical circuits | 1.00 DA  | 31.455  | 31.46           |
| <b>Equipment:</b>                        |          |         | <b>31.46</b>    |
| <b>Miscellaneous:</b>                    |          |         | <b>22.90</b>    |
| <b>ELECTRICAL Subtotal:</b>              |          |         | <b>2,869.58</b> |

## FLOOR COVERING - CARPET

Supplies -

# State Farm

KALYVAS, JAMES

75-79F9-18M3

| General Contractor O&P Items                          | Quantity    | Unit Price        | Total Cost       |
|-------------------------------------------------------|-------------|-------------------|------------------|
| Carpet tackless strip - 400 lf/box                    | 1.84 BX     | 42.840            | 78.66*           |
| Carpet pad - Premium grade                            | 2,008.30 SF | 1.290             | 2,590.70*        |
| Carpet - Premium grade - Allowance                    | 2,351.90 SF | 6.784             | 15,955.31*       |
| Carpet seaming tape - 66 lf per roll                  | 4.70 RL     | 16.825            | 79.14*           |
|                                                       |             | <b>Supplies:</b>  | <b>18,703.81</b> |
| Contractor Labor -<br>Flooring Installer              | 28.95 HR    | 96.290            | 2,787.46*        |
|                                                       |             | <b>Labor:</b>     | <b>2,787.46</b>  |
| Equipment -<br>Carpet power stretcher                 | 3.34 DA     | 40.000            | 133.50*          |
| Carpet seaming iron                                   | 3.34 DA     | 16.343            | 54.55*           |
|                                                       |             | <b>Equipment:</b> | <b>188.05</b>    |
| <b>FLOOR COVERING - CARPET Subtotal:</b>              |             |                   | <b>21,679.32</b> |
| <b>FLOOR COVERING - STONE</b>                         |             |                   |                  |
| Supplies -<br>Tile/stone sealer - 1 gallon            | 4.73 GL     | 106.468           | 503.75*          |
|                                                       |             | <b>Supplies:</b>  | <b>503.75</b>    |
| Contractor Labor -<br>Tile/Cultured Marble Installer  | 9.23 HR     | 171.080           | 1,579.36*        |
|                                                       |             | <b>Labor:</b>     | <b>1,579.36</b>  |
| <b>FLOOR COVERING - STONE Subtotal:</b>               |             |                   | <b>2,083.11</b>  |
| <b>FLOOR COVERING - CERAMIC TILE</b>                  |             |                   |                  |
| Supplies -<br>Tile/stone sealer - 1 gallon            | 0.33 GL     | 106.468           | 35.52*           |
| Tile grout sealer - 1 quart                           | 1.28 QT     | 35.177            | 45.01*           |
|                                                       |             | <b>Supplies:</b>  | <b>80.53</b>     |
| Contractor Labor -<br>Tile/Cultured Marble Installer  | 3.74 HR     | 170.250           | 636.42*          |
|                                                       |             | <b>Labor:</b>     | <b>636.42</b>    |
| <b>FLOOR COVERING - CERAMIC TILE Subtotal:</b>        |             |                   | <b>716.95</b>    |
| <b>FLOOR COVERING - WOOD</b>                          |             |                   |                  |
| Supplies -<br>Wood flooring adhesive                  | 8.37 GL     | 42.062            | 351.89*          |
| Nails for hardwood flooring nailer - (1000 count box) | 3.01 BX     | 24.108            | 72.49*           |
| Engineered wood flooring - High grade                 | 352.30 SF   | 7.587             | 2,672.90         |
|                                                       |             | <b>Supplies:</b>  | <b>3,097.28</b>  |
| Contractor Labor -<br>Wood Flooring Installer         | 15.48 HR    | 106.720           | 1,651.68*        |
|                                                       |             | <b>Labor:</b>     | <b>1,651.68</b>  |
| Equipment -<br>Hardwood flooring nailing tool         | 1.27 DA     | 40.000            | 50.72*           |
|                                                       |             | <b>Equipment:</b> | <b>50.72</b>     |

# State Farm

KALYVAS, JAMES

75-79F9-18M3

| General Contractor O&P Items                                | Quantity  | Unit Price | Total Cost |
|-------------------------------------------------------------|-----------|------------|------------|
| FLOOR COVERING - WOOD Subtotal:                             |           |            | 4,799.68   |
| FINISH CARPENTRY / TRIMWORK                                 |           |            |            |
| Supplies -                                                  |           |            |            |
| Baseboard - 4 1/4" finger-joint pine                        | 73.99 LF  | 2.640      | 195.34*    |
| 6d finish nails (based on 5 lb box)                         | 0.49 LB   | 4.023      | 1.98*      |
|                                                             |           | Supplies:  | 197.32     |
| Contractor Labor -                                          |           |            |            |
| Carpenter - Finish, Trim/Cabinet                            | 22.86 HR  | 105.170    | 2,404.57*  |
|                                                             |           | Labor:     | 2,404.57   |
| FINISH CARPENTRY / TRIMWORK Subtotal:                       |           |            | 2,601.89   |
| FINISH HARDWARE                                             |           |            |            |
| Contractor Labor -                                          |           |            |            |
| Carpenter - Mechanic                                        | 0.63 HR   | 108.670    | 68.11*     |
|                                                             |           | Labor:     | 68.11      |
| FINISH HARDWARE Subtotal:                                   |           |            | 68.11      |
| FRAMING & ROUGH CARPENTRY                                   |           |            |            |
| Supplies -                                                  |           |            |            |
| 5/8" BC plywood                                             | 11.03 SH  | 62.891     | 693.88*    |
| 1/4" crown, 18 gauge staples for air gun, approx 5000 count | 0.20 BX   | 33.530     | 6.73*      |
|                                                             |           | Supplies:  | 700.61     |
| Contractor Labor -                                          |           |            |            |
| Carpenter - General Frammer                                 | 4.03 HR   | 103.030    | 415.30*    |
|                                                             |           | Labor:     | 415.30     |
| FRAMING & ROUGH CARPENTRY Subtotal:                         |           |            | 1,115.91   |
| HEAT, VENT & AIR CONDITIONING                               |           |            |            |
| Supplies -                                                  |           |            |            |
| Radiant tube heater - straight - Gas (60,000 BTU)           | 2.00 EA   | 3,065.000  | 6,130.00   |
| Black pipe, 1" schedule 40                                  | 40.82 LF  | 3.410      | 139.18*    |
|                                                             |           | Supplies:  | 6,269.18   |
| Contractor Labor -                                          |           |            |            |
| Heating / A.C. Mechanic                                     | 19.39 HR  | 140.000    | 2,715.16*  |
|                                                             |           | Labor:     | 2,715.16   |
| HEAT, VENT & AIR CONDITIONING Subtotal:                     |           |            | 8,984.34   |
| INSULATION                                                  |           |            |            |
| Supplies -                                                  |           |            |            |
| Insulation - R-38 unfaced batt                              | 140.15 SF | 1.592      | 223.12     |
|                                                             |           | Supplies:  | 223.12     |
| Contractor Labor -                                          |           |            |            |
| Insulation Installer                                        | 1.06 HR   | 110.000    | 116.87*    |
|                                                             |           | Labor:     | 116.87     |

# State Farm

KALYVAS, JAMES

75-79F9-18M3

| General Contractor O&P Items                                               | Quantity  | Unit Price | Total Cost |
|----------------------------------------------------------------------------|-----------|------------|------------|
| INSULATION Subtotal:                                                       |           |            | 339.99     |
| <b>LABOR ONLY</b>                                                          |           |            |            |
| Contractor Labor -<br>Residential Superintendent                           | 150.00 HR | 86.090     | 12,913.50  |
| Labor:                                                                     |           |            | 12,913.50  |
| LABOR ONLY Subtotal:                                                       |           |            | 12,913.50  |
| <b>LIGHT FIXTURES</b>                                                      |           |            |            |
| Contractor Labor -<br>Electrician                                          | 19.35 HR  | 142.500    | 2,756.81*  |
| Labor:                                                                     |           |            | 2,756.81   |
| LIGHT FIXTURES Subtotal:                                                   |           |            | 2,756.81   |
| <b>MARBLE - CULTURED OR NATURAL</b>                                        |           |            |            |
| Supplies -<br>Silicone caulk - 10 oz tube                                  | 0.09 TB   | 11.991     | 1.14*      |
| Vanity top - one sink - cultured marble - High grade                       | 3.83 LF   | 88.410     | 338.62*    |
| Supplies:                                                                  |           |            | 339.76     |
| Contractor Labor -<br>Tile/Cultured Marble Installer                       | 1.64 HR   | 170.250    | 279.44*    |
| Labor:                                                                     |           |            | 279.44     |
| MARBLE - CULTURED OR NATURAL Subtotal:                                     |           |            | 619.20     |
| <b>ORNAMENTAL IRON</b>                                                     |           |            |            |
| Supplies -<br>Orn. iron gate with hinges & latch - 3'-4' wide x 3'-4' high | 7.00 EA   | 250.014    | 1,750.07*  |
| Supplies:                                                                  |           |            | 1,750.07   |
| Contractor Labor -<br>Ornamental Iron Installer                            | 12.73 HR  | 134.070    | 1,706.39*  |
| Labor:                                                                     |           |            | 1,706.39   |
| ORNAMENTAL IRON Subtotal:                                                  |           |            | 3,456.46   |
| <b>PLUMBING</b>                                                            |           |            |            |
| Supplies -<br>Plastic debris bag - 42-45 gal 3-4 mil (based on 50 cnt. bx) | 0.04 BX   | 41.450     | 1.66       |
| Caulking - acrylic - 10 oz tube                                            | 0.16 TB   | 7.210      | 1.14*      |
| Brass bolts used to secure bowl to the floor - two                         | 2.00 EA   | 4.263      | 8.52*      |
| Wax ring closet gasket                                                     | 2.00 EA   | 3.473      | 6.94*      |
| 1/2" Compression angle stop                                                | 2.00 EA   | 12.482     | 24.96      |
| Water line copper cap/plug                                                 | 4.00 EA   | 1.650      | 6.60       |
| Gas/water line cap/plug                                                    | 3.00 EA   | 1.210      | 3.63       |
| Water heater seismic strap kit - 56 to 80 gallon                           | 1.00 EA   | 26.986     | 26.99      |
| Silicone caulk - 10 oz tube                                                | 0.06 TB   | 11.991     | 0.77*      |
| "P" trap with flange - 1 1/2" ABS                                          | 1.00 EA   | 8.360      | 8.36       |
| Kitchen sink - single bowl - Premium grade                                 | 1.00 EA   | 808.380    | 808.38     |
| Pressure relief valve - Commercial, 1"                                     | 1.00 EA   | 95.350     | 95.35      |



# State Farm

KALYVAS, JAMES

75-79F9-18M3

## General Contractor O&P Items

|                                                     | Quantity | Unit Price | Total Cost |
|-----------------------------------------------------|----------|------------|------------|
| Water heater - 100 gal - CA approved                | 1.00 EA  | 4,950.918  | 4,950.92   |
| Sink faucet - Kitchen - Premium grade               | 1.00 EA  | 427.000    | 427.00     |
| 3/8" ferrule & nut                                  | 2.00 EA  | 0.960      | 1.92       |
| 3/8" OD x 15" chrome or stainless steel supply line | 2.00 EA  | 5.793      | 11.59      |

**Supplies: 6,384.73**

### Contractor Labor -

|         |          |         |           |
|---------|----------|---------|-----------|
| Plumber | 4.75 HR  | 140.000 | 665.20*   |
| Plumber | 15.63 HR | 140.000 | 2,188.78* |
| Plumber | 0.53 HR  | 138.490 | 73.87*    |

**Labor: 2,927.85**

**PLUMBING Subtotal: 9,312.58**

## PAINTING

### Material -

|                                      |          |        |           |
|--------------------------------------|----------|--------|-----------|
| Painter's putty                      | 1.91 GL  | 26.480 | 50.50*    |
| 160 - 180 grit sandpaper - per sheet | 23.22 SH | 1.030  | 23.92     |
| Sealer - stain blocker - latex based | 1.36 GL  | 34.626 | 47.10*    |
| Latex paint                          | 39.71 GL | 54.014 | 2,145.16* |
| PVA - latex drywall primer/sealer    | 37.59 GL | 19.593 | 736.54*   |
| Caulking - acrylic                   | 4.62 TB  | 3.382  | 15.61*    |

**Material: 3,018.83**

### Supplies -

|                                               |           |        |           |
|-----------------------------------------------|-----------|--------|-----------|
| Latex paint                                   | 38.46 GL  | 54.014 | 2,077.36* |
| Painter's putty                               | 3.31 GL   | 26.480 | 87.78*    |
| 160 - 180 grit sandpaper - per sheet          | 248.93 SH | 1.030  | 256.39*   |
| PVA - latex drywall primer/sealer             | 2.09 GL   | 19.593 | 40.86*    |
| Caulking - acrylic                            | 39.94 TB  | 3.382  | 135.07*   |
| Masonry sealer - clear acrylic                | 0.32 GL   | 36.490 | 11.83*    |
| Oil based or water-oil hybrid sealer/primer   | 1.39 GL   | 35.319 | 49.00*    |
| Exterior latex                                | 13.14 GL  | 61.308 | 805.87*   |
| Exterior sealer                               | 10.52 GL  | 41.103 | 432.27*   |
| Oil based stain                               | 4.02 GL   | 55.219 | 221.84*   |
| Paint thinner (mineral spirits)               | 4.24 GL   | 19.256 | 81.66*    |
| Polyurethane finish                           | 11.87 GL  | 64.990 | 771.18*   |
| Spray paint - 11-13 oz can - enamel paint     | 4.21 EA   | 9.009  | 37.93     |
| Spray paint - 11-13 oz can - primer           | 4.21 EA   | 8.031  | 33.81     |
| Sealer - stain blocker - latex based          | 8.44 GL   | 34.626 | 292.17*   |
| Oil based or water-oil hybrid paint           | 6.16 GL   | 64.214 | 395.57*   |
| Paint - Crackling (ageing) glazing            | 5.40 QT   | 21.189 | 114.35*   |
| Paint - Translucent color glazing             | 2.70 QT   | 22.870 | 61.71*    |
| Exterior oil based or water-oil hybrid sealer | 1.87 GL   | 46.256 | 86.72*    |

**Supplies: 5,993.37**

### Contractor Labor -

|         |           |         |            |
|---------|-----------|---------|------------|
| Painter | 10.61 HR  | 116.310 | 1,234.60*  |
| Painter | 403.21 HR | 116.310 | 46,897.93* |
| Painter | 166.35 HR | 116.080 | 19,309.69* |

**Labor: 67,442.22**

**PAINTING Subtotal: 76,454.42**

**State Farm**

KALYVAS, JAMES

75-79F9-18M3

**General Contractor O&P Items**

**Quantity**

**Unit Price**

**Total Cost**

**ROOFING**

Supplies -

|                                                            |              |         |            |
|------------------------------------------------------------|--------------|---------|------------|
| 1 1/4" roofing nails, (based on 50 lb box)                 | 65.54 LB     | 2.032   | 133.18     |
| Roofing cement - per tube                                  | 20.19 EA     | 7.050   | 142.31*    |
| Step flashing                                              | 379.72 EA    | 0.990   | 375.92     |
| Counterflashing - Alum., .032", 12" wide                   | 99.34 LF     | 1.692   | 168.09*    |
| Galvanized steel flashing, 14" wide                        | 33.68 LF     | 1.750   | 58.95*     |
| Ridge flashing - G.I., 26 gauge, 10" wide                  | 16.84 LF     | 3.032   | 51.06      |
| Ice or water barrier (w/ modified bitumen base)            | 95.69 SF     | 0.634   | 60.67      |
| 1" x 2" All-purpose S-P-F furring strip                    | 11,600.03 LF | 0.232   | 2,691.21   |
| 30 lb ASTM roofing felt - 216 SF roll                      | 29.00 RL     | 36.762  | 1,066.10   |
| Tile roofing - High grade - Clay barrel tile               | 58.00 SQ     | 346.566 | 20,100.87* |
| Self-adhering base sheet - 2 SQ roll                       | 1.93 RL      | 151.000 | 291.67*    |
| Bitumen cap sheet self-adhering - granular top - 1 SQ roll | 3.86 RL      | 142.000 | 548.57*    |
| Roofing cement (per gallon price based on a 5 gl bucket)   | 0.13 GL      | 16.780  | 2.18       |
| 1 1/4" Copper roofing nails, (based on 50 lb box)          | 6.28 LB      | 20.680  | 129.77*    |
| Ridge cap for tile roofing                                 | 12.88 BX     | 240.100 | 3,092.68*  |
| Drip edge - painted aluminum, 10' lengths                  | 61.68 EA     | 10.245  | 631.92*    |
| Galvanized steel flashing, up to 24" wide (W)              | 171.36 LF    | 3.150   | 539.80*    |
| Flashing - pre-bent L-flashing - 6" x 6" x 10' - painted   | 8.32 EA      | 26.511  | 220.64*    |
| Flashing - pipe jack - galvanized - 6"                     | 11.00 EA     | 33.150  | 364.65     |

**Supplies: 30,670.24**

Contractor Labor -

|                            |           |         |            |
|----------------------------|-----------|---------|------------|
| General Laborer            | 0.93 HR   | 65.000  | 60.29*     |
| Roofer                     | 34.13 HR  | 250.450 | 8,548.34*  |
| Roofer                     | 213.58 HR | 250.450 | 53,492.32* |
| Membrane Roofing Installer | 8.64 HR   | 135.240 | 1,167.83*  |

**Labor: 63,268.78**

**Miscellaneous: 11,670.09**

**ROOFING Subtotal: 105,609.11**

**SCAFFOLDING**

Contractor Labor -

|                 |          |        |           |
|-----------------|----------|--------|-----------|
| General Laborer | 56.85 HR | 65.000 | 3,695.16* |
|-----------------|----------|--------|-----------|

**Labor: 3,695.16**

Equipment -

|                                                          |           |        |            |
|----------------------------------------------------------|-----------|--------|------------|
| Scaffold guardrail rental, per rail - per month          | 664.01 MO | 3.400  | 2,257.62*  |
| Scaffold guardrail post rental - per month               | 664.01 MO | 3.250  | 2,158.02*  |
| Scaffold - sec. per month (2 ends/2 x-braces/2 catwalks) | 166.00 MO | 86.309 | 14,327.42* |
| Fall protection harness and lanyard rental - per week    | 10.00 WK  | 22.000 | 220.00     |

**Equipment: 18,963.06**

**SCAFFOLDING Subtotal: 22,658.22**

**SOFFIT, FASCIA, & GUTTER**

Contractor Labor -

|                  |          |         |            |
|------------------|----------|---------|------------|
| Siding Installer | 89.53 HR | 125.000 | 11,191.83* |
|------------------|----------|---------|------------|

**Labor: 11,191.83**

# State Farm

KALYVAS, JAMES

75-79F9-18M3

| General Contractor O&P Items                              | Quantity  | Unit Price            | Total Cost       |
|-----------------------------------------------------------|-----------|-----------------------|------------------|
| SOFFIT, FASCIA, & GUTTER Subtotal:                        |           |                       | 11,191.83        |
| <b>SPECIALTY ITEMS</b>                                    |           |                       |                  |
| Supplies -                                                |           |                       |                  |
| Modular BBQ grill island                                  | 1.00 EA   | 5,250.000             | 5,250.00         |
|                                                           |           | <b>Supplies:</b>      | <b>5,250.00</b>  |
| Contractor Labor -                                        |           |                       |                  |
| Electrician                                               | 1.55 HR   | 142.500               | 221.12*          |
| Carpenter - Mechanic                                      | 4.18 HR   | 108.890               | 454.95*          |
|                                                           |           | <b>Labor:</b>         | <b>676.07</b>    |
|                                                           |           | <b>Miscellaneous:</b> | <b>2,550.05</b>  |
| <b>SPECIALTY ITEMS Subtotal:</b>                          |           |                       | <b>8,476.12</b>  |
| <b>STUCCO &amp; EXTERIOR PLASTER</b>                      |           |                       |                  |
| Supplies -                                                |           |                       |                  |
| Washed sand                                               | 0.44 CY   | 72.889                | 32.31*           |
| Stucco - base coat mix                                    | 2.05 BG   | 14.100                | 28.93*           |
| Stucco - color coat mix                                   | 0.92 BG   | 25.852                | 23.87*           |
| Metal lath for plaster application                        | 104.97 SF | 0.474                 | 49.76            |
| Stucco patch - pre-mixed                                  | 16.75 BG  | 23.745                | 397.67*          |
| Synthetic stucco finish coat                              | 62.55 5G  | 62.540                | 3,911.92*        |
| 15 lb ASTM roofing felt - 432 SF roll                     | 0.28 RL   | 36.579                | 10.13*           |
| Adhesive primer (base coat)                               | 7.51 5G   | 84.000                | 630.51*          |
|                                                           |           | <b>Supplies:</b>      | <b>5,085.10</b>  |
| Contractor Labor -                                        |           |                       |                  |
| Stucco Installer                                          | 492.02 HR | 83.630                | 41,147.88*       |
|                                                           |           | <b>Labor:</b>         | <b>41,147.88</b> |
| Equipment -                                               |           |                       |                  |
| Pressure washing machine - variable pressure              | 5.61 DA   | 101.164               | 567.80*          |
| Cement/mortar mixer, 10 cubic foot                        | 0.42 DA   | 102.332               | 43.00*           |
| Scaffold - section per day (2 ends/2 x-braces/2 catwalks) | 13.43 DA  | 24.827                | 333.44*          |
| Scaffold end section, one X-brace, & two connectors       | 13.43 DA  | 6.820                 | 91.60*           |
|                                                           |           | <b>Equipment:</b>     | <b>1,035.84</b>  |
|                                                           |           | <b>Miscellaneous:</b> | <b>35,487.70</b> |
| <b>STUCCO &amp; EXTERIOR PLASTER Subtotal:</b>            |           |                       | <b>82,756.52</b> |
| <b>TILE</b>                                               |           |                       |                  |
| Supplies -                                                |           |                       |                  |
| Ceramic tile grout - 25 lb bag                            | 1.18 BG   | 31.272                | 37.02*           |
| Thinset - multipurpose latex fortified - 50 lb bag        | 1.01 BG   | 21.614                | 21.73*           |
| Tile/stone sealer - 1 gallon                              | 0.35 GL   | 106.468               | 37.57*           |
| Ceramic tile - bullnose - 3/4" x 6" - High grade          | 19.25 EA  | 1.950                 | 37.55*           |
| Ceramic/porcelain tile - Premium grade                    | 2.22 SF   | 11.840                | 26.31*           |
| Tile grout sealer - 1 quart                               | 3.48 QT   | 35.177                | 122.45*          |
| Ceramic/porcelain tile - High grade                       | 64.62 SF  | 6.740                 | 435.56*          |
| Mosaic - ceramic/porcelain tile - Premium grade           | 9.72 SF   | 19.910                | 193.59*          |
|                                                           |           | <b>Supplies:</b>      | <b>911.78</b>    |
| Contractor Labor -                                        |           |                       |                  |

# State Farm

KALYVAS, JAMES

75-79F9-18M3

## General Contractor O&P Items

|                                 | Quantity | Unit Price | Total Cost      |
|---------------------------------|----------|------------|-----------------|
| Tile/Cultured Marble Installer  | 0.69 HR  | 171.080    | 117.81*         |
| Tile/Cultured Marble Installer  | 34.44 HR | 170.250    | 5,862.91*       |
| <b>Labor:</b>                   |          |            | <b>5,980.72</b> |
| Equipment -<br>Ceramic tile saw | 0.33 DA  | 65.000     | 21.19*          |
| <b>Equipment:</b>               |          |            | <b>21.19</b>    |
| <b>TILE Subtotal:</b>           |          |            | <b>6,913.69</b> |

## TEMPORARY REPAIRS

|                                    |         |         |                 |
|------------------------------------|---------|---------|-----------------|
| Equipment -<br>Portable toilet     | 5.00 MO | 225.000 | 1,125.00        |
| <b>Equipment:</b>                  |         |         | <b>1,125.00</b> |
| <b>TEMPORARY REPAIRS Subtotal:</b> |         |         | <b>1,125.00</b> |

## WINDOWS - SLIDING PATIO DOORS

|                                                |         |         |               |
|------------------------------------------------|---------|---------|---------------|
| Supplies -<br>Patio door screen, 36" wide      | 7.00 EA | 87.635  | 613.48*       |
| <b>Supplies:</b>                               |         |         | <b>613.48</b> |
| Contractor Labor -<br>Carpenter - Mechanic     | 0.44 HR | 108.670 | 48.30*        |
| <b>Labor:</b>                                  |         |         | <b>48.30</b>  |
| <b>WINDOWS - SLIDING PATIO DOORS Subtotal:</b> |         |         | <b>661.78</b> |

## WINDOW REGLAZING & REPAIR

|                                                    |          |         |                  |
|----------------------------------------------------|----------|---------|------------------|
| Supplies -<br>160 - 180 grit sandpaper - per sheet | 30.59 SH | 1.030   | 31.51            |
| Window screen - 10 - 16 SF with frame              | 19.00 EA | 54.824  | 1,041.58*        |
| Window screen - 1 - 9 SF with frame                | 21.00 EA | 38.540  | 809.34           |
| General purpose cleaning chemical                  | 1.09 GL  | 18.260  | 19.98*           |
| Graphite lubricant - Aerosol can, 10 oz.           | 3.09 EA  | 12.805  | 39.57            |
| <b>Supplies:</b>                                   |          |         | <b>1,941.98</b>  |
| Contractor Labor -<br>Carpenter - Mechanic         | 12.06 HR | 108.670 | 1,310.25*        |
| Carpenter - Mechanic                               | 70.91 HR | 109.110 | 7,737.08*        |
| <b>Labor:</b>                                      |          |         | <b>9,047.33</b>  |
| <b>WINDOW REGLAZING &amp; REPAIR Subtotal:</b>     |          |         | <b>10,989.31</b> |

## WINDOWS - SKYLIGHTS


|                                                |         |         |                 |
|------------------------------------------------|---------|---------|-----------------|
| Supplies -<br>Roof window, 9.1 - 10 sf         | 1.00 EA | 900.388 | 900.39          |
| Roof window step flashing kit for 9.1 to 10 sf | 1.00 EA | 134.307 | 134.31          |
| <b>Supplies:</b>                               |         |         | <b>1,034.70</b> |
| Contractor Labor -<br>Carpenter - Mechanic     | 1.62 HR | 108.890 | 175.89*         |
| <b>Labor:</b>                                  |         |         | <b>175.89</b>   |

State Farm

KALYVAS, JAMES

75-79F9-18M3

| General Contractor O&P Items                | Quantity  | Unit Price | Total Cost |
|---------------------------------------------|-----------|------------|------------|
| WINDOWS - SKYLIGHTS Subtotal:               |           |            | 1,210.59   |
| <b>WINDOW TREATMENT</b>                     |           |            |            |
| Contractor Labor -<br>Hardware Installer    | 22.03 HR  | 86.210     | 1,899.58*  |
| Labor:                                      |           |            | 1,899.58   |
| WINDOW TREATMENT Subtotal:                  |           |            | 1,899.58   |
| <b>WALLPAPER</b>                            |           |            |            |
| Supplies -                                  |           |            |            |
| Wallpaper adhesive                          | 11.20 GL  | 21.218     | 237.58*    |
| Wallpaper - Premium grade (per single roll) | 125.14 RL | 37.300     | 4,667.90*  |
| Wall sizing                                 | 10.45 GL  | 34.245     | 357.88*    |
| Supplies:                                   |           |            | 5,263.36   |
| Contractor Labor -<br>Wallpaper Hanger      | 86.39 HR  | 120.470    | 10,407.78* |
| Labor:                                      |           |            | 10,407.78  |
| WALLPAPER Subtotal:                         |           |            | 15,671.14  |
| Material                                    |           |            | 3,018.83   |
| Supplies                                    |           |            | 105,914.58 |
| Labor                                       |           |            | 306,099.51 |
| Equipment                                   |           |            | 31,965.84  |
| Miscellaneous                               |           |            | 53,484.35  |
| General Contractor O&P Items Subtotal       |           |            | 500,483.11 |
| Permit                                      |           |            | 308.24     |
| Material Sales Tax                          |           |            | 10,348.64  |
| General Contractor Overhead                 |           |            | 51,114.40  |
| General Contractor Profit                   |           |            | 51,114.40  |
| Total                                       |           |            | 613,368.79 |

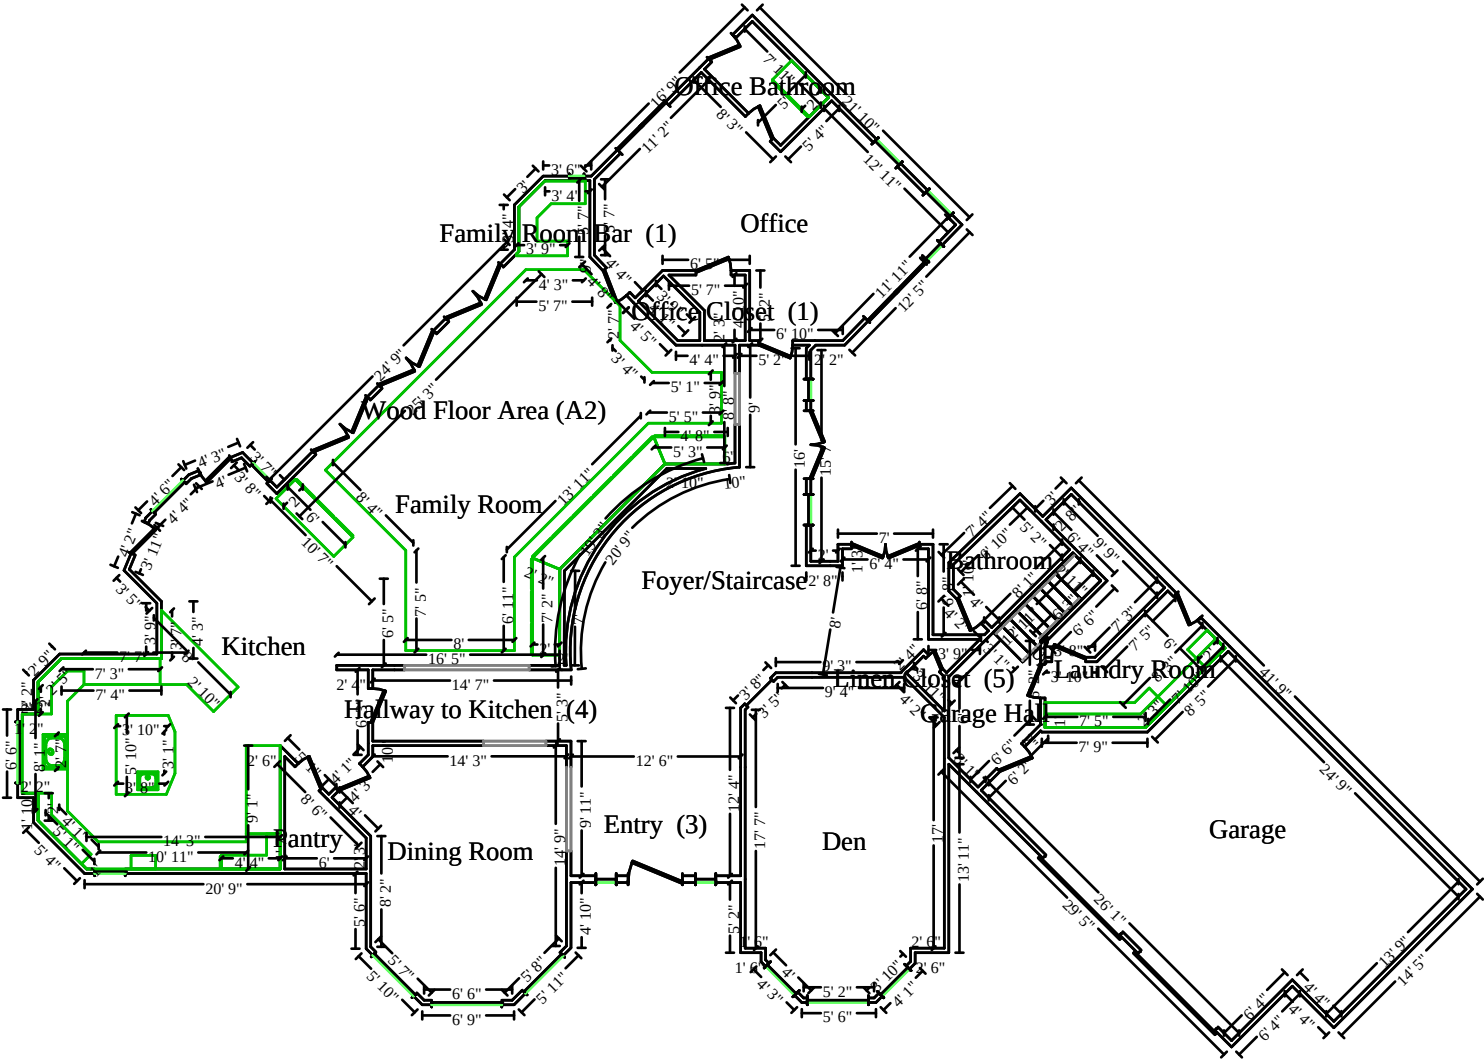

First Floor



Exterior

