



State Farm
P.O. Box 106169
Atlanta, GA 30348-6169
Fax: 1-844-236-3646
statefarmfireclaims@statefarm.com

Structural Damage Claim Policy

This estimate is priced based on estimated market pricing for the cost of materials, labor, and other factors at the time of the loss.

Adjustments in market pricing and timing of the repairs may impact the final cost of covered repairs. Should you or the contractor you select have questions concerning our estimate, please contact us. If your contractor's estimate is higher than ours, you should contact us prior to beginning repairs. State Farm will work with you and your contractor to determine the actual and necessary cost of covered repairs at the time repairs will be completed, subject to policy terms, conditions and limits.

- We want you to receive quality repair work to restore the damages to your property.
- We will provide you with a detailed estimate of the scope of the damage and costs of repairs. Should the contractor you select have questions concerning our estimate, they should contact your claim representative directly.
- Depending upon the complexity of your repair, our estimate may or may not include an allowance for general contractor's overhead and profit. If you have questions regarding general contractor's overhead and profit and whether general contractor services are appropriate for your loss, please contact your claim representative before proceeding with repairs.
- There may be building codes, ordinances, laws, or regulations that affect the repairs of your property. These items may or may not be covered by your policy. Please contact your claim representative if you have any questions regarding coverage which may be available under your policy.
- State Farm® cannot authorize any contractor to proceed with work on your property. Repairs should proceed only with your authorization.
- State Farm does not guarantee the quality of the workmanship of any contractor or guarantee that the work will be accomplished within any specific time frame.
- It is understood that the contractor is hired by you, our insured, and that they work for you - not State Farm.

If you have any questions or need additional information regarding your claim, please contact your claim representative immediately.



Building Estimate Summary Guide

This summary guide is based on a sample estimate and is provided for reference only.

Please refer to the estimate for specifics of your claim.

State Farm Insurance

Insured: Smith, Joe & Jane	Estimate: 00-0000-000
Property: 1 Main Street	Claim number: 00-0000-000
Anywhere, IL 00000-0000	Policy Number: 00-00-0000-0
Type of Loss: Other	Price List: ILBL8F_MAR 13
Deductible: \$1,000.00	Restoration/Service/ Remodel
	F = Factored In, D = Do Not Apply

Summary for Dwelling

Line Item Total [1]		5,953.10
Material Sales Tax	@ 10.000% x 1,520.00	
Subtotal		6,105.10
General Contractor Overhead [2]	@ 10.0% x 6,105.10	610.51
General Contractor Profit	@ 10.0% x 6,105.10	
Replacement Cost Value (Including General Contractor Overhead and Profit [3])		7,326.12
Less Depreciation (Including Taxes) [4]		(832.50)
Less General Contractor Overhead & Profit on Recoverable & Non - recoverable Depreciation		(166.50)
Less Deductible [5]		
Net Actual Cash Value Payment [6]		

Maximum Additional Amounts Available If Incurred:

Total Line Item Depreciation (Including Taxes) [4]	832.50	
Less Non - recoverable Depreciation (Including Taxes) [7]		
Subtotal		312.50
General Contractor O&P on Depreciation	166.50	
Less General Contractor O&P on Non - recoverable Depreciation		
Subtotal		
Total Maximum Additional Amounts Available If Incurred [8]		
Total Amount of Claim If Incurred [9]		

Claim Representative

ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.

- 1. Line Item Total** – Total value of all line items in the estimate plus possible adjustments for *labor minimums*. *Labor Minimum* is to cover a certain minimum number of hours for drive-time, set up time and applicable administrative costs and repairs.
- 2. General Contractor's Overhead and Profit** – General contractor's charge for coordinating your repairs.
- 3. Replacement Cost Value (RCV)** – Estimated cost to repair or replace damaged property.
- 4. Depreciation** – The decrease in the value of property over a period of time due to wear, tear, condition, and obsolescence. A portion or all of this amount may be eligible for replacement cost benefits.
- 5. Deductible** – The insurer will pay for losses, up to the policy limits, in excess of your applicable deductible.
- 6. Net Actual Cash Value Payment (ACV)** – The repair or replacement cost of the damaged part of the property less *depreciation* and *deductible*.
- 7. Non Recoverable Depreciation** – *Depreciation* applied to items that are not eligible for replacement cost benefits.
- 8. Total Maximum Additional Amount if Incurred** – Total amount of recoverable depreciation after actual repair or replacement of the property.
- 9. Total Amount of Claim if Incurred** – Total amount of the claim, including *net actual cash value payment* and *total maximum additional amount available if incurred*.

State Farm

SCHACTER, BARBARA

75-79D9-35K

Insured:	SCHACTER, BARBARA	Estimate:	75-79D9-35K
Property:	935 CHATTANOOGA AVE	Claim Number:	7579D935K
	PACIFIC PLSDS, CA 90272-2328	Policy Number:	71GFE6010
Cellular:	310-617-7790	Price List:	CALA28_AUG25
Type of Loss:	Fire		Restoration/Service/Remodel
Deductible:	\$0.00		
Date of Loss:	1/7/2025		
Date Inspected:	3/22/2025		

Summary for Coverage A - Dwelling - 39 Smoke

Line Item Total	67,346.38
Material Sales Tax	733.86
Subtotal	68,080.24
General Contractor Overhead	6,808.02
General Contractor Profit	6,808.02
Replacement Cost Value (Including General Contractor Overhead and Profit)	81,696.28
Less Deductible	(0.00)
Net Payment	\$81,696.28

Lundy, Chakira
866-787-8676 x 10490

ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.

Any person who knowingly presents false or fraudulent information to obtain or amend insurance coverage or to make a claim for the payment of a loss is guilty of a crime and may be subject to fines and confinement in state prison.

State Farm

SCHACTER, BARBARA

75-79D9-35K

Insured:	SCHACTER, BARBARA	Estimate:	75-79D9-35K
Property:	935 CHATTANOOGA AVE	Claim Number:	7579D935K
	PACIFIC PLSDS, CA 90272-2328	Policy Number:	71GFE6010
Cellular:	310-617-7790	Price List:	CALA28_AUG25
Type of Loss:	Fire		Restoration/Service/Remodel
Deductible:	\$0.00		
Date of Loss:	1/7/2025		
Date Inspected:	3/22/2025		

Summary for Coverage A - Dwelling - 39 Smoke - Trees, Shrubs, and Landscaping

Line Item Total	41,151.25
Material Sales Tax	1,585.28
Subtotal	42,736.53
General Contractor Overhead	4,273.66
General Contractor Profit	4,273.66
Replacement Cost Value (Including General Contractor Overhead and Profit)	51,283.85
Less Deductible	(0.00)
Less Amount Over Limit(s)	(23,711.14)
Net Payment	\$27,572.71

Lundy, Chakira
866-787-8676 x 10490

ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.

Any person who knowingly presents false or fraudulent information to obtain or amend insurance coverage or to make a claim for the payment of a loss is guilty of a crime and may be subject to fines and confinement in state prison.

State Farm

SCHACTER, BARBARA

75-79D9-35K

Insured:	SCHACTER, BARBARA	Estimate:	75-79D9-35K
Property:	935 CHATTANOOGA AVE	Claim Number:	7579D935K
	PACIFIC PLSDS, CA 90272-2328	Policy Number:	71GFE6010
Cellular:	310-617-7790	Price List:	CALA28_AUG25
Type of Loss:	Fire		Restoration/Service/Remodel
Deductible:	\$0.00		
Date of Loss:	1/7/2025		
Date Inspected:	3/22/2025		

**Summary for Coverage A - Other Structures - 33 Fire, Lightning,
& Removal**

Line Item Total	39,107.28
California Lumber Assessment Fee	42.21
Material Sales Tax	1,693.33
Subtotal	40,842.82
General Contractor Overhead	4,084.31
General Contractor Profit	4,084.31
Replacement Cost Value (Including General Contractor Overhead and Profit)	49,011.44
Less Deductible	(0.00)
Net Payment	\$49,011.44

Lundy, Chakira
866-787-8676 x 10490

**ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND
LIMITS OF YOUR POLICY.**

Any person who knowingly presents false or fraudulent information to obtain or amend insurance coverage or to make a claim for the payment of a loss is guilty of a crime and may be subject to fines and confinement in state prison.


State Farm

SCHACTER, BARBARA

75-79D9-35K

Source - EagleView Roof & Walls


Exterior



Dwelling Roof

2,824.41	Surface Area	28.24	Number of Squares
270.75	Total Perimeter Length	82.14	Total Ridge Length

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
<u>No accidental direct physical loss noted to the dwelling roof.</u>					
Totals: Dwelling Roof			0.00	0.00	0.00



Swing Pavillion


121.89	Surface Area	1.22	Number of Squares
45.09	Total Perimeter Length	9.00	Total Ridge Length

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
1. R&R Pergola - Pre-manufactured Kit - Cedar	121.89 SF	33.92 *	275.82	882.06	5,292.39
2. R&R 1" x 12" lumber (1 BF per LF)	420.00 LF	8.57 *	141.65	748.22	4,489.27
This line item accounts for additional slats & framing on the roof of the pergola.					
3. Exterior - seal or prime then paint with one finish coat	121.89 SF	1.94 *	4.17	48.14	288.78
paint pergola and extra framing on roof					
Totals: Swing Pavillion			421.64	1,678.42	10,070.44

State Farm

SCHACTER, BARBARA

75-79D9-35K



Deck

Height: 3'

68.00 LF Floor Perimeter

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
4. 2" x 10" x 20' #2 treated pine (material only)	14.00 EA	59.98 *	79.77	183.90	1,103.39
5. 2" x 10" x 14' #2 treated pine (material only)	8.00 EA	42.24 *	32.10	74.00	444.02
6. 2" x 10" x 8' #2 treated pine (material only)	4.00 EA	23.99 *	9.12	21.02	126.10
7. R&R Labor to install joist - floor or ceiling - 2x10	296.00 LF	4.80 *	0.28	284.22	1,705.30
8. 2" x 6" x 14' #2 treated pine (material only)	43.00 EA	19.75 *	80.68	186.00	1,115.93
9. R&R 6" softwood deck planking - Labor only (per SF)	280.00 SF	9.12 *	5.05	511.74	3,070.39
10. Deck pier or footing	0.35 CY	245.17 *	6.51	18.46	110.78
11. Post anchor - 4"	6.00 EA	46.27 *	9.52	57.42	344.56
12. 4" x 4" x 8' - treated lumber post - material only	2.00 EA	24.46	4.65	10.72	64.29
13. Prime & paint deck - 1 coat primer, 1 coat paint	280.00 SF	2.31 *	8.51	131.06	786.37
14. Stain/finish deck handrail	68.00 LF	11.35 *	12.08	156.78	940.66
15. Deck lattice work - Vinyl (per SF)	504.00 SF	4.49 *	106.77	473.96	2,843.69
Totals: Deck			355.04	2,109.28	12,655.48

Gazebo

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Gazebo

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
16. Gazebo - Pre-manuf. Kit - Octagon - Treated Pine - Large	1.00 EA	11,460.32 *	769.50	2,445.96	14,675.78
17. Crane and operator - 14 ton capacity - 65' extension boom	8.00 HR	180.00	0.00	288.00	1,728.00
18. Exterior - seal or prime then paint with one finish coat	2,048.00 SF	1.94 *	70.04	808.62	4,851.78
Totals: Gazebo			839.54	3,542.58	21,255.56

Retaining Wall

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
19. Clean concrete the surface area	380.00 SF	0.49 *	0.36	37.32	223.88
20. Paint concrete the surface area	380.00 SF	1.51 *	10.11	116.78	700.69
Totals: Retaining Wall			10.47	154.10	924.57

Trees, Shrubs and Landscaping

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
21. Tree replacement - (Bid Item)	30.00 EA	221.45 *	258.75	1,380.46	8,282.71

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Trees, Shrubs and Landscaping

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
Remove shrub - \$114.62 Replace shrub - \$106.83 Total remove & replace per shrub - \$221.45					
22. Tree replacement - (Bid Item)	25.00 EA	1,362.31 *	1,326.53	7,076.86	42,461.14
Price for tree removal per tree - \$959.95 Price for tree replacement - \$402.36 Total to remove & replace tree - \$1,362.31					
Totals: Trees, Shrubs and Landscaping			1,585.28	8,457.32	50,743.85

Area Totals: Exterior

1,960.39 SF Walls	266.76 Exterior Perimeter of Walls	1,960.39 SF Walls and Ceiling
1,960.39 Exterior Wall Area		334.76 LF Floor Perimeter
2,946.30 Surface Area	29.46 Number of Squares	315.84 Total Perimeter Length
91.14 Total Ridge Length		

Total: Exterior	3,211.97	15,941.70	95,649.90
------------------------	-----------------	------------------	------------------

Area Totals: Source - EagleView Roof & Walls

1,960.39 SF Walls	266.76 Exterior Perimeter of Walls	1,960.39 SF Walls and Ceiling
1,960.39 Exterior Wall Area		334.76 LF Floor Perimeter
2,946.30 Surface Area	29.46 Number of Squares	315.84 Total Perimeter Length
91.14 Total Ridge Length		

Total: Source - EagleView Roof & Walls	3,211.97	15,941.70	95,649.90
---	-----------------	------------------	------------------

Debris Removal

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
23. Dumpster load - Approx. 12 yards, 1-3 tons of debris	1.00 EA	615.16 *	0.00	123.04	738.20

Revised by VAEMK8 on 10/3/2025

275. Temporary hand washing station (per month)	1.00 MO	247.00	0.00	49.40	296.40
---	---------	--------	------	-------	--------

CONTINUED - Debris Removal

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
276. Temporary toilet (per month)	1.00 MO	225.00	0.00	45.00	270.00
<u>End revisions by VAEMK8 on 10/3/2025</u>					
Totals: Debris Removal			0.00	217.44	1,304.60


Main Level

Main Level

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
24. R&R I-joist - 9 1/2" deep - 1 3/4" flange	74.00 LF	7.55 *	17.79	115.30	691.79
25. R&R Sheathing - OSB - 3/4" - tongue and groove	64.00 SF	5.31 *	7.78	69.52	417.14
26. R&R Drilled bottom plate - 2" x 6" treated lumber	30.00 LF	18.08 *	4.56	109.40	656.36
Total: Main Level			30.13	294.22	1,765.29


Stairs

Height: 31' 9"



52.35 SF Floor


Missing Wall	3' 4" X 31' 8 7/8"	Opens into Exterior
Missing Wall	9' 1" X 31' 8 7/8"	Opens into Exterior
Missing Wall	9' 1" X 31' 8 7/8"	Opens into Exterior



Subroom: Stairs1 (2) **Height: 25' 6"**

11.11 SF Floor


Missing Wall	3' 4" X 25' 5 7/8"	Opens into STAIRS
Missing Wall	3' 4" X 25' 5 7/8"	Opens into Exterior
Missing Wall	3' 4" X 25' 5 7/8"	Opens into Exterior
Missing Wall	3' 4" X 25' 5 7/8"	Opens into STAIRS2



Subroom: Stairs2 (3) **Height: 25' 6"**

35.41 SF Floor

Missing Wall	3' 4" X 25' 5 7/8"	Opens into STAIRS1
Missing Wall	6' X 25' 5 7/8"	Opens into Exterior
Missing Wall	3' 4" X 25' 5 7/8"	Opens into STAIRS3
Missing Wall	6' X 25' 5 7/8"	Opens into Exterior



Subroom: Stairs3 (4) **Height: 21' 1"**

11.11 SF Floor

Missing Wall	3' 4" X 21' 1 7/16"	Opens into STAIRS2
Missing Wall	3' 4" X 21' 1 7/16"	Opens into STAIRS4
Missing Wall	3' 4" X 21' 1 7/16"	Opens into Exterior
Missing Wall	3' 4" X 21' 1 7/16"	Opens into Exterior


Subroom: Stairs4 (5)

Height: 21' 1"



68.18 SF Floor

Missing Wall	3' 4" X 21' 1 7/16"	Opens into STAIRS3
Missing Wall	11' 10" X 21' 1 7/16"	Opens into Exterior
Missing Wall	3' 4" X 21' 1 7/16"	Opens into STAIRS5
Missing Wall	11' 10" X 21' 1 7/16"	Opens into Exterior




Subroom: Stairs5 (6)

Height: 13'

11.11 SF Floor

Missing Wall	3' 4" X 12' 11 15/16"	Opens into STAIRS4
Missing Wall	3' 4" X 12' 11 15/16"	Opens into STAIRS6
Missing Wall	3' 4" X 12' 11 15/16"	Opens into Exterior
Missing Wall	3' 4" X 12' 11 15/16"	Opens into Exterior



Subroom: Stairs6 (7)

Height: 13'


40.96 SF Floor

Missing Wall	3' 4" X 12' 11 15/16"	Opens into STAIRS5
Missing Wall	7' X 12' 11 15/16"	Opens into Exterior
Missing Wall	3' 4" X 12' 11 15/16"	Opens into STAIRS7
Missing Wall	7' X 12' 11 15/16"	Opens into Exterior

State Farm

SCHACTER, BARBARA

75-79D9-35K



Subroom: Stairs7 (1)

Height: 8'

11.11 SF Floor

Missing Wall	3' 4" X 8'	Opens into STAIRS6
Missing Wall	3' 4" X 8'	Opens into Exterior
Missing Wall	3' 4" X 8'	Opens into Exterior
Missing Wall	3' 4" X 8'	Opens into Exterior

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
27. I-joist - 9 1/2" deep - 1 3/4" flange	74.00 LF	5.83 *	17.79	89.84	539.05
28. Sheathing - OSB - 3/4" - tongue and groove	64.00 SF	3.26 *	7.78	43.28	259.70
29. Drilled bottom plate - 2" x 6" treated lumber	30.00 LF	5.11 *	4.56	31.58	189.44
30. Seal & paint stair tread - per side - per LF	34.08 LF	8.89 *	3.82	61.36	368.15
31. Seal & paint stair riser - per side - per LF	34.08 LF	5.94 *	2.56	41.00	246.00
Totals: Stairs			36.51	267.06	1,602.34

Area Totals: Main Level

241.35 SF Floor
241.35 Floor Area

157.50 Total Area

Total: Main Level			66.64	561.28	3,367.63
--------------------------	--	--	--------------	---------------	-----------------

Interior Main Level

Main Level

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
250. Deodorize building - Hot thermal fog	16,901.21 CF	0.11	0.00	371.82	2,230.95

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Main Level

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
251. Hydroxyl generator - odor counteractant - 3 optics	4.00 DA				REVISED
252. Solid odor counteractant - crystal or solid block	2.00 DA	27.76 *	2.08	11.52	69.12
EXTERIOR CLEANING					
253. Clean stucco	1,942.96 SF				REVISED
254. Clean exterior door (per side)	1.00 EA				PER ESTIMATE
255. Clean patio door (sliding glass) (per side)	4.00 EA				PER ESTIMATE
256. Clean window unit (per side) 3 - 9 SF	4.00 EA				PER ESTIMATE
257. Clean window unit (per side) 10 - 20 SF	6.00 EA				PER ESTIMATE
258. Clean door bell/chime	1.00 EA	16.26 *	0.00	3.26	19.52
259. Clean light fixture	1.00 EA	17.13 *	0.01	3.42	20.56
260. Clean overhead door & hardware - Large	1.00 EA	97.88 *	0.04	19.58	117.50
<u>Revised by VAEMK8 on 10/3/2025</u>					
277. Equipment setup, take down, and monitoring (hourly charge)	8.00 HR	95.00 *	0.00	152.00	912.00
278. Negative air fan/Air scrubber (24 hr period) - No monit.	36.00 DA	73.02	0.00	525.74	3,154.46
279. Add for HEPA filter (for negative air exhaust fan)	9.00 EA	217.22 *	167.67	424.54	2,547.19
280. Hydroxyl generator - odor counteractant - 2 optics	36.00 DA	180.00	0.00	1,296.00	7,776.00
281. Equipment decontamination charge - per piece of equipment	18.00 EA	53.27 *	9.85	193.76	1,162.47

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Main Level

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
282. Add for personal protective equipment (hazardous cleanup)	24.00 EA	24.79 *	26.11	124.22	745.29
327. Clean with pressure/chemical spray	2,996.50 SF	0.52 *	2.85	312.22	1,873.25
* 336. Fire Remediation & Restoration – Pacific Palisades	1.00 EA	2,049.00 *E	0.00	409.80	2,458.80


Fire Remediation & Restoration – Windows and Sliding Glass Doors (Labor Only)
 Fire remediation and restoration of ten (10) large windows and nine (9) sliding glass doors at 935 Chattanooga Ave, Pacific Palisades, CA 90272, affected by smoke and soot exposure. Process includes HEPA vacuum removal of soot and ash from frames, tracks and assemblies, wet neutralization to eliminate smoke film and odor, inspection and adjustment of roller assemblies for proper alignment and closure, silicone lubrication, and final operational verification. Work performed under insurance restoration protocols and post-fire remediation standards.

1 \$2,049.00 \$2,049.00

Materials and any component replacements are excluded and will be quoted separately via change order if required upon inspection.

End revisions by VAEMK8 on 10/3/2025

Total: Main Level			208.61	3,847.88	23,087.11
--------------------------	--	--	---------------	-----------------	------------------


**Master Bedroom Closet****Height: Peaked**

116.80 SF Walls
 132.61 SF Walls & Ceiling
 20.20 LF Ceil. Perimeter

15.82 SF Ceiling
 15.63 SF Floor
 12.35 LF Floor Perimeter

Door	2' 10 1/4" X 1' 5 13/16"	Opens into MASTER_BEDRO
Door	3' 10" X 5' 8 1/8"	Opens into MASTER_BEDRO
Door	2' 6 11/16" X 1' 6"	Opens into MASTER_BEDRO
Door	3' 9 15/16" X 5' 8 1/8"	Opens into MASTER_BEDRO
Door	1' 9 1/16" X 1' 5"	Opens into MASTER_BEDRO

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
174. HEPA Vacuuming - Detailed - (PER SF)	148.24 SF	1.20 *	0.00	35.58	213.47
175. Clean more than the walls and ceiling	148.24 SF	0.82 *	0.14	24.34	146.04
176. Clean light fixture	1.00 EA	17.13 *	0.01	3.42	20.56
177. Clean baseboard - Heavy	12.35 LF	0.81 *	0.01	2.00	12.01
178. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
179. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01
180. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
Totals: Master Bedroom Closet			0.20	75.64	453.89

**Bedroom 2 Closet****Height: Sloped**

129.97 SF Walls
 144.50 SF Walls & Ceiling
 20.30 LF Ceil. Perimeter

14.53 SF Ceiling
 14.37 SF Floor
 12.51 LF Floor Perimeter


Door	3' 9 7/8" X 5' 8 1/2"	Opens into BEDROOM_2
Door	3' 9 3/8" X 5' 8 7/8"	Opens into BEDROOM_2

State Farm

SCHACTER, BARBARA

75-79D9-35K

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
195. HEPA Vacuuming - Detailed - (PER SF)	158.86 SF	1.20 *	0.00	38.12	228.75
196. Clean more than the walls and ceiling	158.86 SF	0.82 *	0.15	26.10	156.52
197. Clean light fixture	1.00 EA	17.13 *	0.01	3.42	20.56
198. Clean baseboard - Heavy	12.51 LF	0.81 *	0.01	2.02	12.16
199. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
200. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01
201. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
Totals: Bedroom 2 Closet			0.21	79.96	479.80




Bedroom 1 Closet

Height: 8'

100.37 SF Walls	15.02 SF Ceiling
115.38 SF Walls & Ceiling	15.02 SF Floor
17.28 LF Ceil. Perimeter	11.78 LF Floor Perimeter

Door	5' 5 7/8" X 6' 10 11/16"		Opens into BEDROOM_1		
DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
38. HEPA Vacuuming - Detailed - (PER SF)	130.40 SF	1.20 *	0.00	31.30	187.78
40. Clean more than the walls and ceiling	130.40 SF	0.82 *	0.12	21.40	128.45
41. Clean light fixture	1.00 EA	17.13 *	0.01	3.42	20.56
42. Clean baseboard - Heavy	11.78 LF	0.81 *	0.01	1.90	11.45
43. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
44. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01
45. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
Totals: Bedroom 1 Closet			0.18	68.32	410.05



Height: Sloped

142.39 SF Walls	9.71 SF Ceiling
152.11 SF Walls & Ceiling	9.65 SF Floor
24.37 LF Ceil. Perimeter	13.61 LF Floor Perimeter

Door	3' 7 1/4" X 3' 5"	Opens into HALLWAY2
Door	3' 7" X 2' 10 11/16"	Opens into HALLWAY2
Door	3' 5 9/16" X 2' 11 1/8"	Opens into HALLWAY2
Missing Wall - Goes to Floor	3' 4" X 3' 5"	Opens into HALLWAY2
Door	3' 8 1/16" X 2' 11"	Opens into HALLWAY2
Door	3' 8" X 3' 5"	Opens into HALLWAY2


DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

****CLEANING****

46. HEPA Vacuuming - Detailed - (PER SF)	161.75 SF	1.20 *	0.00	38.82	232.92
47. Clean more than the walls and ceiling	161.75 SF	0.82 *	0.15	26.56	159.35
48. Clean light fixture	1.00 EA	17.13 *	0.01	3.42	20.56
49. Clean baseboard - Heavy	13.61 LF	0.81 *	0.01	2.20	13.23
50. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
51. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01

CONTINUED - Hallway Closet


DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
52. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
Totals: Hallway Closet			0.21	81.30	487.87



Master Bathroom **Height: 8'**

176.53 SF Walls	47.95 SF Ceiling
224.48 SF Walls & Ceiling	47.95 SF Floor
24.30 LF Ceil. Perimeter	29.18 LF Floor Perimeter

Door	1' 11 15/16" X 6' 7 15/16"	Opens into MASTER_ENTR2
Window	3' 9 3/4" X 1' 9 5/8"	Opens into Exterior



Subroom: Master Bathroom (1) **Height: 8'**

59.95 SF Walls	11.87 SF Ceiling
71.82 SF Walls & Ceiling	11.87 SF Floor
7.23 LF Ceil. Perimeter	13.55 LF Floor Perimeter

Missing Wall - Goes to Ceiling	2' 13/16" X 7' 8"	Opens into MASTER_BATHR
Missing Wall - Goes to Ceiling	2' 2 1/4" X 7' 8"	Opens into MASTER_BATHR
Missing Wall - Goes to Ceiling	2' 7/8" X 7' 8"	Opens into MASTER_BATHR

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
149. HEPA Vacuuming - Detailed - (PER SF)	356.12 SF	1.20 *	0.00	85.46	512.80
150. Clean more than the walls and ceiling	356.12 SF	0.82 *	0.34	58.46	350.82
151. Clean light fixture - Heavy	1.00 EA	23.11 *	0.01	4.62	27.74

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Master Bathroom

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
152. Clean recessed light fixture	2.00 EA	17.15 *	0.02	6.86	41.18
153. Clean bathroom fan	1.00 EA	45.53 *	0.00	9.10	54.63
154. Clean baseboard - Heavy	42.74 LF	0.81 *	0.04	6.92	41.58
155. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
156. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01
157. Clean window unit (per side) 3 - 9 SF - Heavy	1.00 EA			PER ESTIMATE	
158. Clean door / window opening (per side)	2.00 EA				REVISED
159. Clean outlet or switch	3.00 EA	5.61 *	0.00	3.36	20.19
160. Clean toilet paper dispenser - Heavy	1.00 EA	15.32 *	0.00	3.06	18.38
161. Clean towel bar - Heavy	1.00 EA	15.29 *	0.00	3.06	18.35
162. Clean bath accessory - Heavy	1.00 EA	15.41 *	0.01	3.08	18.50
163. Clean mirror - Heavy	6.00 SF	1.60 *	0.01	1.92	11.53
164. Clean toilet - Heavy	1.00 EA	48.35 *	0.01	9.68	58.04
165. Clean toilet seat - Heavy	1.00 EA	10.10 *	0.00	2.02	12.12
166. Clean shower - Heavy	1.00 EA	93.47 *	0.01	18.70	112.18
167. Clean shower door - Heavy	1.00 EA	37.47 *	0.01	7.50	44.98
168. Clean tub / shower faucet - Heavy	1.00 EA	31.27 *	0.00	6.26	37.53
169. Clean vanity - inside and out	5.75 LF	21.36 *	0.06	24.58	147.46
170. Clean countertop - Heavy	11.50 SF	1.55 *	0.02	3.56	21.41


State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Master Bathroom

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
171. Clean cabinetry - upper - inside and out	3.00 LF	23.84 *	0.03	14.30	85.85
172. Clean sink - Heavy	1.00 EA	29.02 *	0.00	5.80	34.82
173. Clean sink faucet - Heavy	1.00 EA	22.11 *	0.00	4.42	26.53
<u>Revised by VAEMK8 on 10/3/2025</u>					
299. R&R 1/2" drywall - hung, taped, ready for texture	26.35 SF	4.42 *	1.68	23.64	141.78
300. Tape joint for new to existing drywall - per LF	31.33 LF	12.65 *	1.19	79.50	477.01
301. Painting - Faux (special effects) - 2 part	57.69 SF	3.95 *	1.37	45.86	275.11
302. Seal the surface area w/PVA primer - one coat	57.69 SF	0.97 *	0.33	11.26	67.55
303. Detach & Reset Recessed light fixture	0.50 EA	160.25 *	0.00	16.02	96.15
304. Detach & Reset Heat/AC register - Mechanically attached	1.50 EA	20.99 *	0.00	6.30	37.79
305. Mask or cover per square foot	236.48 SF	0.63 *	2.02	30.20	181.20
306. Floor protection - cardboard and tape	59.82 SF	0.66 *	1.59	8.22	49.29
328. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
<u>End revisions by VAEMK8 on 10/3/2025</u>					
Totals: Master Bathroom			8.79	514.02	3,084.31



Window

Door

Missing Wall

Hallway Bathroom

Height: 8'

196.55 SF Walls	52.27 SF Ceiling
248.82 SF Walls & Ceiling	52.27 SF Floor
25.15 LF Ceil. Perimeter	30.30 LF Floor Perimeter

3' 11 3/16" X 1' 10 7/16"


Opens into Exterior

2' 1/16" X 6' 8 5/16"

Opens into HALLWAY2

1' 3 3/4" X 8'

Opens into HALLWAY_BATH



Subroom: Hallway Bathroom (1)

Height: 8'

65.96 SF Walls	10.45 SF Ceiling
76.41 SF Walls & Ceiling	10.45 SF Floor
6.48 LF Ceil. Perimeter	12.96 LF Floor Perimeter

Missing Wall - Goes to Ceiling

2' 11 15/16" X 5'

Opens into HALLWAY_BATH

Missing Wall - Goes to Ceiling

2' 1/16" X 7' 8"

Opens into HALLWAY_BATH

Missing Wall - Goes to Ceiling

1' 5 3/4" X 5'

Opens into HALLWAY_BATH

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
53. HEPA Vacuuming - Detailed - (PER SF)	387.94 SF	1.20 *	0.00	93.10	558.63
54. Clean more than the walls and ceiling	387.94 SF	0.82 *	0.37	63.70	382.18
55. Clean light fixture - Heavy	2.00 EA	23.11 *	0.02	9.24	55.48
56. Clean baseboard - Heavy	43.26 LF	0.81 *	0.04	7.00	42.08
57. Clean bathroom fan	1.00 EA	45.53 *	0.00	9.10	54.63
58. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
59. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01
60. Clean window unit (per side) 3 - 9 SF - Heavy	1.00 EA			PER ESTIMATE	
61. Clean door / window opening (per side)	2.00 EA				REVISED

State Farm

SCHACTER, BARBARA

75-79D9-35K


CONTINUED - Hallway Bathroom

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
62. Clean outlet or switch	3.00 EA	5.61 *	0.00	3.36	20.19
63. Clean toilet paper dispenser - Heavy	1.00 EA	15.32 *	0.00	3.06	18.38
64. Clean towel bar - Heavy	1.00 EA	15.29 *	0.00	3.06	18.35
65. Clean bath accessory - Heavy	1.00 EA	15.41 *	0.01	3.08	18.50
66. Clean mirror - Heavy	4.00 SF	1.60 *	0.00	1.28	7.68
67. Clean toilet - Heavy	1.00 EA	48.35 *	0.01	9.68	58.04
68. Clean toilet seat - Heavy	1.00 EA	10.10 *	0.00	2.02	12.12
69. Clean tub - Heavy	1.00 EA	42.76 *	0.01	8.56	51.33
70. Clean shower - Heavy	1.00 EA	93.47 *	0.01	18.70	112.18
71. Clean shower door - Heavy	1.00 EA	37.47 *	0.01	7.50	44.98
72. Clean tub / shower faucet - Heavy	2.00 EA	31.27 *	0.01	12.50	75.05
73. Clean vanity - inside and out	5.33 LF	21.36 *	0.06	22.80	136.71
74. Clean countertop - Heavy	10.66 SF	1.55 *	0.02	3.30	19.84
75. Clean sink - Heavy	1.00 EA	29.02 *	0.00	5.80	34.82
76. Clean sink faucet - Heavy	1.00 EA	22.11 *	0.00	4.42	26.53
<u>Revised by VAEMK8 on 10/3/2025</u>					
329. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
<u>End revisions by VAEMK8 on 10/3/2025</u>					
Totals: Hallway Bathroom			0.61	301.56	1,809.51

State Farm

SCHACTER, BARBARA

75-79D9-35K



Hallway Closet 2

Height: 8'

88.25 SF Walls
98.93 SF Walls & Ceiling
13.08 LF Ceil. Perimeter

10.69 SF Ceiling
10.69 SF Floor
10.61 LF Floor Perimeter

Door

2' 5 3/4" X 6' 7 1/2"

Opens into HALLWAY2

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
77. HEPA Vacuuming - Detailed - (PER SF)	109.62 SF	1.20 *	0.00	26.30	157.84
78. Clean more than the walls and ceiling	109.62 SF	0.82 *	0.10	18.00	107.99
79. Clean light fixture	1.00 EA	17.13 *	0.01	3.42	20.56
80. Clean baseboard - Heavy	10.61 LF	0.81 *	0.01	1.72	10.32
81. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
82. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01
83. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
Totals: Hallway Closet 2			0.16	59.74	358.52




Door	2' 4 11/16" X 6' 6 3/8"	Opens into MASTER_ENTR2
Door	2' 1/16" X 6' 8 5/16"	Opens into HALLWAY_BATH
Door	2' 6 13/16" X 6' 8 5/16"	Opens into BEDROOM_1
Door	2' 5 3/4" X 6' 7 1/2"	Opens into HALLWAY_CLO1
Missing Wall - Goes to Floor	2' 5 5/16" X 6' 7 15/16"	Opens into BEDROOM_2
Door	2' 5 3/16" X 6' 10 5/16"	Opens into ENTRANCE
Door	3' 7 1/4" X 3' 5"	Opens into HALLWAY_CLOS
Door	3' 7" X 2' 10 11/16"	Opens into HALLWAY_CLOS
Door	3' 5 9/16" X 2' 11 1/8"	Opens into HALLWAY_CLOS
Missing Wall - Goes to Floor	3' 4" X 3' 5"	Opens into HALLWAY_CLOS
Door	3' 8 1/16" X 2' 11"	Opens into HALLWAY_CLOS
Door	3' 8" X 3' 5"	Opens into HALLWAY_CLOS
Window	2' 7 1/4" X 4' 7 1/2"	Opens into Exterior

Page: 25

CONTINUED - Hallway

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
<u>Revised by VAEMK8 on 10/3/2025</u>					
308. R&R 1/2" drywall - hung, taped, ready for texture	104.64 SF	4.42 *	6.66	93.84	563.01
309. Tape joint for new to existing drywall - per LF	104.64 LF	12.65 *	3.98	265.54	1,593.22
310. Painting - Faux (special effects) - 2 part	104.64 SF	3.95 *	2.49	83.16	498.98
311. Seal the surface area w/PVA primer - one coat	104.64 SF	0.97 *	0.60	20.42	122.52
314. Mask or cover per square foot	243.09 SF	0.63 *	2.08	31.06	186.29
315. Floor protection - cardboard and tape	87.61 SF	0.66 *	2.33	12.02	72.17
<u>End revisions by VAEMK8 on 10/3/2025</u>					
Totals: Hallway			18.88	755.72	4,534.42



Entrance Closet

Height: Sloped

85.37 SF Walls
 91.67 SF Walls & Ceiling
 10.21 LF Ceil. Perimeter

6.30 SF Ceiling
 6.24 SF Floor
 8.09 LF Floor Perimeter

Door

2' 3/4" X 6' 9 1/2"

Opens into ENTRANCE

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
93. HEPA Vacuuming - Detailed - (PER SF)	97.91 SF	1.20 *	0.00	23.50	140.99
94. Clean more than the walls and ceiling	97.91 SF	0.82 *	0.09	16.08	96.46

CONTINUED - Entrance Closet

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
95. Clean light fixture - Heavy	1.00 EA	23.11 *	0.01	4.62	27.74
96. Clean baseboard - Heavy	8.09 LF	0.81 *	0.01	1.32	7.88
97. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
98. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01
99. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
Totals: Entrance Closet			0.15	55.82	334.88



Living Room

Height: Sloped

536.19 SF Walls
 937.58 SF Walls & Ceiling
 82.67 LF Ceil. Perimeter

401.39 SF Ceiling
 398.65 SF Floor
 59.22 LF Floor Perimeter

Missing Wall - Goes to Floor
 Window
 Window
 Door
 Door


3' 3 5/16" X 6' 7 15/16"
 5' 8 5/8" X 4' 4 3/8"
 6' 1 1/16" X 4' 3 15/16"
 9' 11 1/4" X 6' 6 3/8"
 10' 1/8" X 6' 7 1/8"

Opens into ENTRANCE
 Opens into Exterior
 Opens into Exterior
 Opens into Exterior
 Opens into Exterior

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
100. HEPA Vacuuming - Detailed - (PER SF)	1,336.24 SF	1.20 *	0.00	320.70	1,924.19
101. Clean more than the walls and ceiling	1,336.24 SF	0.82 *	1.27	219.40	1,316.39
102. Clean chandelier - Heavy	1.00 EA	98.96 *	0.01	19.80	118.77

CONTINUED - Living Room

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
103. Clean smoke/carbon monoxide detector	1.00 EA	10.13 *	0.00	2.02	12.15
104. Clean baseboard - Heavy	59.22 LF	0.81 *	0.06	9.62	57.65
105. Clean crown molding	82.67 LF	0.71 *	0.08	11.76	70.54
106. Clean patio door (sliding glass) (per side)	2.00 EA			PER ESTIMATE	
107. Clean door hardware - Heavy	2.00 EA	14.99 *	0.05	6.02	36.05
108. Clean window unit (per side) 10 - 20 SF - Heavy	2.00 EA			PER ESTIMATE	
109. Clean door / window opening (per side)	4.00 EA				REVISED
110. Clean outlet or switch	6.00 EA	5.61 *	0.01	6.74	40.41
<u>Revised by VAEMK8 on 10/3/2025</u>					
331. Clean door / window opening (per side)	2.00 EA	21.06 *	0.01	8.42	50.55
<u>End revisions by VAEMK8 on 10/3/2025</u>					
Totals: Living Room			1.49	604.48	3,626.70

**Bedroom 1****Height: Sloped**

277.25 SF Walls
 376.52 SF Walls & Ceiling
 40.57 LF Ceil. Perimeter

99.28 SF Ceiling
 97.48 SF Floor
 32.13 LF Floor Perimeter

Door 5' 5 7/8" X 6' 10 11/16"
Window 7' 11 3/4" X 3' 7 5/16"
Door 2' 6 13/16" X 6' 8 5/16"

Opens into BEDROOM_1_CL
Opens into Exterior
Opens into HALLWAY2

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

State Farm

SCHACTER, BARBARA

75-79D9-35K


CONTINUED - Bedroom 1

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
111. HEPA Vacuuming - Detailed - (PER SF)	474.00 SF	1.20 *	0.00	113.76	682.56
112. Clean more than the walls and ceiling	474.00 SF	0.82 *	0.45	77.84	466.97
113. Clean crown molding - Heavy	40.57 LF	1.01 *	0.04	8.20	49.22
114. Clean light bar	1.00 EA	29.79 *	0.01	5.96	35.76
115. Clean smoke/carbon monoxide detector	1.00 EA	10.13 *	0.00	2.02	12.15
116. Clean baseboard - Heavy	32.13 LF	0.81 *	0.03	5.20	31.26
117. Clean door (per side) - Heavy	2.00 EA	15.42 *	0.05	6.18	37.07
118. Clean door hardware - Heavy	2.00 EA	14.99 *	0.05	6.02	36.05
119. Clean window unit (per side) 10 - 20 SF - Heavy	3.00 EA				PER ESTIMATE
120. Clean door / window opening (per side)	5.00 EA				REVISED
121. Clean outlet or switch	6.00 EA	5.61 *	0.01	6.74	40.41
<u>Revised by VAEMK8 on 10/3/2025</u>					
330. Clean door / window opening (per side)	2.00 EA	21.06 *	0.01	8.42	50.55
<u>End revisions by VAEMK8 on 10/3/2025</u>					
Totals: Bedroom 1			0.65	240.34	1,442.00

State Farm

SCHACTER, BARBARA


75-79D9-35K



Door

1' 11 7/8" X 6' 7 1/8"

Opens into BEDROOM_2



Door

2' 5 1/2" X 6' 5 15/16"

Opens into STAIRS

Window

2' 6" X 11"

Opens into Exterior

Missing Wall - Goes to Floor

5' 8" X 7'

Opens into LAUNDRY1


DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

**** CLEANING ****

122. HEPA Vacuuming - Detailed - (PER SF)	317.18 SF	1.20 *	0.00	76.12	456.74
123. Clean more than the walls and ceiling - Heavy	317.18 SF	1.02 *	0.30	64.76	388.58
124. Clean light fixture - Heavy	1.00 EA	23.11 *	0.01	4.62	27.74
125. Clean baseboard - Heavy	24.77 LF	0.81 *	0.02	4.02	24.10
126. Clean crown molding	40.68 LF	0.71 *	0.04	5.78	34.70
127. Clean door (per side) - Heavy	2.00 EA	15.42 *	0.05	6.18	37.07
128. Clean door hardware - Heavy	2.00 EA	14.99 *	0.05	6.02	36.05
129. Clean window unit (per side) 10 - 20 SF - Heavy	1.00 EA			PER ESTIMATE	
130. Clean door / window opening (per side)	3.00 EA				REVISED
131. Clean outlet or switch	4.00 EA	5.61 *	0.00	4.48	26.92

CONTINUED - Laundry

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
132. Clean cabinetry - upper - inside and out	10.67 LF	23.84 *	0.11	50.90	305.38
Revised by VAEMK8 on 10/3/2025					
332. Clean door / window opening (per side)	2.00 EA	21.06 *	0.01	8.42	50.55
End revisions by VAEMK8 on 10/3/2025					
Totals: Laundry			0.59	231.30	1,387.83



Pantry

Height: Sloped

75.81 SF Walls
 81.05 SF Walls & Ceiling
 9.93 LF Ceil. Perimeter

5.24 SF Ceiling
 5.12 SF Floor
 7.72 LF Floor Perimeter

Missing Wall - Goes to neither Floor/Ceiling
 Door

2' 8" X 1' 8 1/16"
 2' 1 1/2" X 6' 7 15/16"

Opens into KITCHEN1

Opens into KITCHEN1


DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

****CLEANING****

133. HEPA Vacuuming - Detailed - (PER SF)	86.18 SF	1.20 *	0.00	20.68	124.10
134. Clean more than the walls and ceiling	86.18 SF	0.82 *	0.08	14.16	84.91
135. Clean light fixture	1.00 EA	17.13 *	0.01	3.42	20.56
136. Clean baseboard - Heavy	7.72 LF	0.81 *	0.01	1.26	7.52
137. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
138. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01

CONTINUED - Pantry

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
139. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
Totals: Pantry			0.14	49.82	298.90



Master Entrance

Height: 7'

85.62 SF Walls
 105.84 SF Walls & Ceiling
 16.36 LF Ceil. Perimeter


20.22 SF Ceiling
 20.22 SF Floor
 11.97 LF Floor Perimeter

Door 2' 4 11/16" X 6' 6 3/8"
Door 1' 11 15/16" X 6' 7 15/16"
Missing Wall 3' 1" X 7"

Opens into HALLWAY2
Opens into MASTER_BATHR
Opens into MASTER_BEDRO

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
CLEANING					
140. HEPA Vacuuming - Detailed - (PER SF)	126.05 SF	1.20 *	0.00	30.26	181.52
141. Clean more than the walls and ceiling	126.05 SF	0.82 *	0.12	20.70	124.18
142. Clean light fixture - Heavy	1.00 EA	23.11 *	0.01	4.62	27.74
143. Clean baseboard - Heavy	11.97 LF	0.81 *	0.01	1.94	11.65
144. Clean smoke/carbon monoxide detector	1.00 EA	10.13 *	0.00	2.02	12.15
145. Clean door (per side) - Heavy	2.00 EA	15.42 *	0.05	6.18	37.07
146. Clean door hardware - Heavy	2.00 EA	14.99 *	0.05	6.02	36.05
147. Clean door / window opening (per side)	2.00 EA	21.06 *	0.01	8.42	50.55

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
148. Clean outlet or switch	2.00 EA	5.61 *	0.00	2.24	13.46
Totals: Master Entrance			0.25	82.40	494.37



Height: Sloped

393.57 SF Ceiling
386.59 SF Floor
63.35 LF Floor Perimeter

Opens into STAIRS

Opens into Exterior

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
** <i>CLEANING</i> **					
181. HEPA Vacuuming exposed framing w/ sheathing - Floor	393.57 SF	3.10 *	0.00	244.02	1,464.09
182. HEPA Vacuuming exposed framing w/ sheathing - Walls	628.58 SF	2.17 *	0.00	272.80	1,636.82
183. HEPA Vacuuming - Detailed - (PER SF)	386.59 SF	1.20 *	0.00	92.78	556.69
184. Clean floor or roof joist system - Heavy	393.57 SF	3.07 *	1.12	241.88	1,451.26
185. Clean stud wall - Heavy	628.58 SF	2.46 *	1.79	309.62	1,857.72
186. Clean the floor - Heavy	386.59 SF	1.02 *	0.37	78.94	473.63
187. Clean light fixture - Heavy	1.00 EA	23.11 *	0.01	4.62	27.74
188. Clean overhead door & hardware - Large	1.00 EA	97.88 *	0.04	19.58	117.50

CONTINUED - Garage

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
189. Clean overhead (garage) door opener	1.00 EA	42.67 *	0.00	8.54	51.21
190. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
191. Clean door hardware - Heavy	1.00 EA	14.99 *	0.02	3.00	18.01
192. Clean window unit (per side) 10 - 20 SF - Heavy	1.00 EA			PER ESTIMATE	
193. Clean door / window opening (per side)	2.00 EA				REVISED
194. Clean outlet or switch	6.00 EA	5.61 *	0.01	6.74	40.41
Revised by VAEMK8 on 10/3/2025					
333. Clean door / window opening (per side)	1.00 EA	21.06 *	0.00	4.22	25.28
End revisions by VAEMK8 on 10/3/2025					
Totals: Garage			3.38	1,289.82	7,738.88



Entrance

Height: 8'

141.86 SF Walls	43.35 SF Ceiling
185.21 SF Walls & Ceiling	43.35 SF Floor
30.98 LF Ceil. Perimeter	14.96 LF Floor Perimeter

Door	2' 5 3/16" X 6' 10 5/16"	Opens into HALLWAY2
Missing Wall - Goes to Floor	3' 3 5/16" X 6' 7 15/16"	Opens into LIVING_ROOM2
Door	2' 3/4" X 6' 9 1/2"	Opens into ENTRANCE_CLO
Missing Wall - Goes to Floor	5' 4 3/16" X 6' 11 7/8"	Opens into KITCHEN2
Door	2' 10 13/16" X 6' 7 1/2"	Opens into Exterior

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

CLEANING

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Entrance


DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
202. HEPA Vacuuming - Detailed - (PER SF)	228.56 SF	1.20 *	0.00	54.86	329.13
203. Clean more than the walls and ceiling	228.56 SF	0.82 *	0.22	37.52	225.16
204. Clean light fixture - Heavy	1.00 EA	23.11 *	0.01	4.62	27.74
205. Clean baseboard - Heavy	14.96 LF	0.81 *	0.01	2.42	14.55
206. Clean door (per side) - Heavy	2.00 EA	15.42 *	0.05	6.18	37.07
207. Clean door hardware - Heavy	2.00 EA	14.99 *	0.05	6.02	36.05
208. Clean chair rail	14.96 LF	0.58 *	0.01	1.74	10.43
209. Clean door / window opening (per side)	2.00 EA	21.06 *	0.01	8.42	50.55
210. Clean outlet or switch	4.00 EA	5.61 *	0.00	4.48	26.92
<u>Revised by VAEMK8 on 10/3/2025</u>					
290. R&R 1/2" drywall - hung, taped, ready for texture	32.45 SF	4.42 *	2.07	29.12	174.62
292. Tape joint for new to existing drywall - per LF	64.68 LF	12.65 *	2.46	164.14	984.80
293. Painting - Faux (special effects) - 2 part	64.68 SF	3.95 *	1.54	51.40	308.43
294. Seal the surface area w/PVA primer - one coat	64.68 SF	0.97 *	0.37	12.62	75.73
295. Detach & Reset Recessed light fixture	0.50 EA	160.25 *	0.00	16.02	96.15
297. Detach & Reset Heat/AC register - Mechanically attached	0.50 EA	20.99 *	0.00	2.10	12.60
296. Mask or cover per square foot	141.86 SF	0.63 *	1.21	18.12	108.70

CONTINUED - Entrance

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
307. Floor protection - cardboard and tape	43.35 SF	0.66 *	1.15	5.96	35.72

End revisions by VAEMK8 on 10/3/2025

Totals: Entrance			9.16	425.74	2,554.35
-------------------------	--	--	-------------	---------------	-----------------

**Master Bedroom****Height: Peaked**

310.58 SF Walls	182.66 SF Ceiling
493.24 SF Walls & Ceiling	181.10 SF Floor
57.14 LF Ceil. Perimeter	33.41 LF Floor Perimeter

Door	2' 10 1/4" X 1' 5 13/16"	Opens into MASTER_BEDR1
Door	3' 10" X 5' 8 1/8"	Opens into MASTER_BEDR1
Door	2' 6 11/16" X 1' 6"	Opens into MASTER_BEDR1
Door	3' 9 15/16" X 5' 8 1/8"	Opens into MASTER_BEDR1
Door	1' 9 1/16" X 1' 5"	Opens into MASTER_BEDR1
Door	12' 8 3/16" X 6' 6 3/4"	Opens into Exterior
Missing Wall	3' 1" X 8'	Opens into MASTER_ENTR2


DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

****CLEANING****

211. HEPA Vacuuming - Detailed - (PER SF)	674.33 SF	1.20 *	0.00	161.84	971.04
212. Clean more than the walls and ceiling	674.33 SF	0.82 *	0.64	110.72	664.31
213. Clean crown molding - Heavy	57.14 LF	1.01 *	0.05	11.56	69.32
214. Clean smoke/carbon monoxide detector	1.00 EA	10.13 *	0.00	2.02	12.15
215. Clean baseboard - Heavy	33.41 LF	0.81 *	0.03	5.42	32.51

CONTINUED - Master Bedroom

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
216. Clean door (per side) - Heavy	1.00 EA	15.42 *	0.02	3.08	18.52
217. Clean patio door (sliding glass) (per side)	1.00 EA	63.28 *	0.12	12.68	76.08
218. Clean door hardware - Heavy	2.00 EA	14.99 *	0.05	6.02	36.05
219. Clean door / window opening (per side)	2.00 EA	21.06 *	0.01	8.42	50.55
220. Clean outlet or switch	6.00 EA	5.61 *	0.01	6.74	40.41
Totals: Master Bedroom			0.93	328.50	1,970.94



Bedroom 2

Height: Sloped

338.83 SF Walls
 477.27 SF Walls & Ceiling
 48.28 LF Ceil. Perimeter

138.44 SF Ceiling
 136.81 SF Floor
 35.93 LF Floor Perimeter

Missing Wall - Goes to Floor

2' 5 5/16" X 6' 7 15/16"

Opens into HALLWAY2

Window

5' 7 9/16" X 3' 4 9/16"

Opens into Exterior

Door

1' 11 7/8" X 6' 7 1/8"

Opens into LAUNDRY1

Door

3' 9 7/8" X 5' 8 1/2"

Opens into BEDROOM_2_CL

Door

3' 9 3/8" X 5' 8 7/8"


Opens into BEDROOM_2_CL

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

CLEANING

221. HEPA Vacuuming - Detailed - (PER SF)	614.09 SF	1.20 *	0.00	147.38	884.29
222. Clean more than the walls and ceiling	614.09 SF	0.82 *	0.58	100.84	604.97
223. Clean crown molding - Heavy	48.28 LF	1.01 *	0.05	9.78	58.59

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
224. Clean roof window or skylight	1.00 EA	54.66 *	0.01	10.94	65.61
225. Clean smoke/carbon monoxide detector	1.00 EA	10.13 *	0.00	2.02	12.15
226. Clean baseboard - Heavy	35.93 LF	0.81 *	0.03	5.82	34.95
227. Clean door (per side) - Heavy	2.00 EA	15.42 *	0.05	6.18	37.07
228. Clean door hardware - Heavy	2.00 EA	14.99 *	0.05	6.02	36.05
229. Clean window unit (per side) 10 - 20 SF - Heavy	1.00 EA				PER ESTIMATE
230. Clean door / window opening (per side)	3.00 EA				REVISED
231. Clean outlet or switch	6.00 EA	5.61 *	0.01	6.74	40.41
<u>Revised by VAEMK8 on 10/3/2025</u>					
334. Clean door / window opening (per side)	2.00 EA	21.06 *	0.01	8.42	50.55
<u>End revisions by VAEMK8 on 10/3/2025</u>					
Totals: Bedroom 2			0.79	304.14	1,824.64




98.97 SF Ceiling
97.55 SF Floor
26.84 LF Floor Perimeter

Opens into ENTRANCE
Opens into Exterior

State Farm

SCHACTER, BARBARA

75-79D9-35K



Subroom: Kitchen (2)

Height: Sloped

236.47 SF Walls	98.89 SF Ceiling
335.35 SF Walls & Ceiling	97.50 SF Floor
44.68 LF Ceil. Perimeter	20.84 LF Floor Perimeter

Missing Wall - Goes to Floor

8' 5 1/4" X 6' 7 1/8"

Opens into KITCHEN2

Missing Wall - Goes to neither Floor/Ceiling

2' 8" X 1' 8 1/16"

Opens into PANTRY

Door

2' 1 1/2" X 6' 7 15/16"

Opens into PANTRY

Door


5' 3 9/16" X 6' 6 3/4"

Opens into Exterior

Missing Wall - Goes to Floor

7' 8" X 6' 8"

Opens into KITCHEN



Subroom: Kitchen (1)

Height: 8'

73.18 SF Walls	14.13 SF Ceiling
87.31 SF Walls & Ceiling	14.13 SF Floor
19.15 LF Ceil. Perimeter	11.49 LF Floor Perimeter

Missing Wall - Goes to Floor

7' 8" X 6' 8"

Opens into KITCHEN1

Window

7' 4 3/8" X 3' 11 1/8"

Opens into Exterior

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

**** CLEANING ****

232. HEPA Vacuuming - Detailed - (PER SF)	994.33 SF	1.20 *	0.00	238.64	1,431.84
233. Clean more than the walls and ceiling - Heavy	994.33 SF	1.02 *	0.94	203.02	1,218.18
234. Clean chandelier - Heavy	2.00 EA	98.96 *	0.02	39.58	237.52
235. Clean recessed light fixture	2.00 EA	17.15 *	0.02	6.86	41.18
236. Clean baseboard - Heavy	59.16 LF	0.81 *	0.06	9.60	57.58
237. Clean door (per side) - Heavy	2.00 EA	15.42 *	0.05	6.18	37.07
238. Clean door hardware - Heavy	2.00 EA	14.99 *	0.05	6.02	36.05
239. Clean window unit (per side) 10 - 20 SF - Heavy	1.00 EA				PER ESTIMATE

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Kitchen

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
240. Clean window unit (per side) 21 - 40 SF - Heavy	1.00 EA				PER ESTIMATE
241. Clean door / window opening (per side)	4.00 EA				REVISED
242. Clean outlet or switch	8.00 EA	5.61 *	0.01	8.98	53.87
243. Clean cabinetry - upper - inside and out	9.50 LF	23.84 *	0.10	45.32	271.90
244. Clean cabinetry - full height - inside and out	4.00 LF	41.65 *	0.05	33.34	199.99
245. Clean cabinetry - lower - inside and out	22.00 LF	23.84 *	0.23	104.94	629.65
246. Clean countertop - Heavy	44.00 SF	1.55 *	0.08	13.66	81.94
247. Clean sink - double - Heavy	2.00 EA	38.25 *	0.01	15.30	91.81
248. Clean sink faucet - Heavy	2.00 EA	22.11 *	0.00	8.84	53.06
249. Clean range hood - Heavy	1.00 EA	40.14 *	0.01	8.02	48.17
<u>Revised by VAEMK8 on 8/13/2025</u>					
261. R&R Dishwasher	1.00 EA	737.30 *	50.73	157.60	945.63
263. R&R Range hood	1.00 EA	294.31 *	14.34	61.72	370.37
268. R&R 6-0 6-8 vinyl sliding patio door	1.00 EA	1,235.23 *	80.88	263.22	1,579.33
* 265. 15-AMP Single-Pole Circuit Breaker	177.86 EA	0.00	0.00	0.00	0.00

Recommended Action based on Strike Check Report

End revisions by VAEMK8 on 8/13/2025

Revised by VAEMK8 on 10/3/2025

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Kitchen

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
335. Clean door / window opening (per side)	2.00 EA	21.06 *	0.01	8.42	50.55

End revisions by VAEMK8 on 10/3/2025

Totals: Kitchen			147.59	1,239.26	7,435.69
------------------------	--	--	---------------	-----------------	-----------------

General Items

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

Revised by VAEMK8 on 9/17/2025

* 274. VIP Claim Service	1.00 HR	450.00 *E	0.00	90.00	540.00
--------------------------	---------	-----------	------	-------	--------

HVACi No call No show appointment
 HVACi had a confirmed appointment with me in
 9-17-2025 at 10am-12pm
 1 \$450.00 \$450.00
 The appointment was canceled without notice at
 10:30am, when I was already onsite
 Cancellation fee of 3 hours of labor plus gas
 expense : \$450

316. Furnace - heavy clean, replace filters and service - w/ AC	1.00 EA	625.95 *	1.48	125.50	752.93
317. Seal attic framing for odor control - up to 5/12	413.21 SF	1.85 *	9.42	154.76	928.62
318. Tear out and bag wet insulation in confined space - Cat 3	413.21 SF	2.92 *	2.36	241.80	1,450.73
320. R&R Batt insulation - Add-on for confined spaces	413.21 SF	1.10 *	0.00	90.90	545.43
322. R&R Batt insulation - 12" - R38 - unfaced batt	413.21 SF	3.23 *	67.13	280.36	1,682.16

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - General Items

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
323. HEPA Vacuuming exposed framing - Floor - (PER SF)	413.21 SF	1.54 *	0.00	127.26	763.60
324. Containment Barrier/Airlock/Decon. Chamber	1.00 SF	1.24 *	0.02	0.24	1.50
326. R&R Ductwork system - hot or cold air - 1600 to 2199 SF home	1.00 EA	8,258.81 *	250.48	1,701.86	10,211.15

End revisions by VAEMK8 on 10/3/2025

Totals: General Items	330.89	2,812.68	16,876.12
------------------------------	---------------	-----------------	------------------

Area Totals: Main Level

4,816.57 SF Walls	1,855.61 SF Ceiling	6,672.18 SF Walls and Ceiling
1,852.94 SF Floor	2,018.76 Total Area	556.21 LF Floor Perimeter
1,852.94 Floor Area	284.56 Exterior Perimeter of Walls	762.11 LF Ceil. Perimeter
2,201.27 Exterior Wall Area		4,728.03 Interior Wall Area

Total: Main Level	733.86	13,448.44	80,690.78
--------------------------	---------------	------------------	------------------

Area Totals: Interior

4,816.57 SF Walls	1,855.61 SF Ceiling	6,672.18 SF Walls and Ceiling
1,852.94 SF Floor	2,018.76 Total Area	556.21 LF Floor Perimeter
1,852.94 Floor Area	284.56 Exterior Perimeter of Walls	762.11 LF Ceil. Perimeter
2,201.27 Exterior Wall Area		4,728.03 Interior Wall Area

Total: Interior	733.86	13,448.44	80,690.78
------------------------	---------------	------------------	------------------

Labor Minimums Applied

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
32. Miscellaneous concrete labor minimum	1.00 EA	572.59	0.00	114.52	687.11
267. Electrical labor minimum	1.00 EA	53.48	0.00	10.70	64.18
337. Plumbing labor minimum	1.00 EA	147.26	0.00	29.46	176.72

State Farm

SCHACTER, BARBARA

75-79D9-35K

CONTINUED - Labor Minimums Applied

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
Totals: Labor Minimums Applied			0.00	154.68	928.01

Line Item Totals: 75-79D9-35K			4,012.47	30,323.54	181,940.92
--------------------------------------	--	--	-----------------	------------------	-------------------

COVERAGE	TAX	GCO&P	RCV
Coverage A - Dwelling - 39 Smoke	733.86	13,616.04	81,696.28
Coverage A - Dwelling - 39 Smoke - Trees, Shrubs, and Landscaping	1,585.28	8,547.32	51,283.85
Coverage A - Other Structures - 33 Fire, Lightning, & Removal	1,693.33	8,160.18	48,960.79
Total	4,012.47	30,323.54	181,940.92

Grand Total Areas:

6,776.96 SF Walls	1,855.61 SF Ceiling	8,632.57 SF Walls and Ceiling
2,094.29 SF Floor		890.97 LF Floor Perimeter
		762.11 LF Ceil. Perimeter
2,094.29 Floor Area	2,176.26 Total Area	4,728.03 Interior Wall Area
4,161.66 Exterior Wall Area	551.32 Exterior Perimeter of Walls	
2,946.30 Surface Area	29.46 Number of Squares	315.84 Total Perimeter Length
91.14 Total Ridge Length		

Recap of Taxes, Overhead and Profit

	GC Overhead (10%)	GC Profit (10%)	Material Sales Tax (9.5%)	Storage Rental Tax (9.5%)
Line Items	15,161.77	15,161.77	4,012.47	0.00
Permit	4.22	4.22	0.00	0.00
Total	15,165.99	15,165.99	4,012.47	0.00

Recap by Category


General Contractor O&P Items				Total	%
APPLIANCES				1,031.61	0.57%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		1,031.61	
Smoke					
CLEANING				18,464.75	10.15%
Coverage: Coverage A - Dwelling - 39	@	98.99% =		18,278.55	
Smoke					
Coverage: Coverage A - Other Structures -	@	1.01% =		186.20	
33 Fire, Lightning, & Removal					
CONCRETE & ASPHALT				936.02	0.51%
Coverage: Coverage A - Other Structures -	@	100.00% =		936.02	
33 Fire, Lightning, & Removal					
GENERAL DEMOLITION				1,132.57	0.62%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		1,132.57	
Smoke					
DRYWALL				3,260.62	1.79%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		3,260.62	
Smoke					
ELECTRICAL				53.48	0.03%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		53.48	
Smoke					
HEAVY EQUIPMENT				1,440.00	0.79%
Coverage: Coverage A - Other Structures -	@	100.00% =		1,440.00	
33 Fire, Lightning, & Removal					
FRAMING & ROUGH CARPENTRY				14,242.83	7.83%
Coverage: Coverage A - Other Structures -	@	100.00% =		14,242.83	
33 Fire, Lightning, & Removal					
HAZARDOUS MATERIAL REMEDIATION				27,133.36	14.91%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		27,133.36	
Smoke					
HEAT, VENT & AIR CONDITIONING				8,926.75	4.91%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		8,926.75	
Smoke					
INSULATION				1,789.20	0.98%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		1,789.20	
Smoke					
LABOR ONLY				450.00	0.25%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		450.00	
Smoke - Trees, Shrubs, and Landscaping					
LIGHT FIXTURES				160.26	0.09%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		160.26	
Smoke					
LANDSCAPING				40,701.25	22.36%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		40,701.25	
Smoke - Trees, Shrubs, and Landscaping					
PLUMBING				147.26	0.08%
Coverage: Coverage A - Dwelling - 39	@	100.00% =		147.26	
Smoke					

State Farm



SCHACTER, BARBARA

75-79D9-35K


General Contractor O&P Items				Total	%
PAINTING				8,588.74	4.72%
Coverage: Coverage A - Dwelling - 39 Smoke	@	21.90% =		1,881.34	
Coverage: Coverage A - Other Structures - 33 Fire, Lightning, & Removal	@	78.10% =		6,707.40	
TEMPORARY REPAIRS				472.00	0.26%
Coverage: Coverage A - Dwelling - 39 Smoke	@	100.00% =		472.00	
WINDOWS - SLIDING PATIO DOORS				1,235.23	0.68%
Coverage: Coverage A - Dwelling - 39 Smoke	@	100.00% =		1,235.23	
WATER EXTRACTION & REMEDIATION				1,844.15	1.01%
Coverage: Coverage A - Dwelling - 39 Smoke	@	100.00% =		1,844.15	
EXTERIOR STRUCTURES				15,594.83	8.57%
Coverage: Coverage A - Other Structures - 33 Fire, Lightning, & Removal	@	100.00% =		15,594.83	
General Contractor O&P Items Subtotal				147,604.91	81.11%
Permits and Fees				42.21	0.02%
Coverage: Coverage A - Other Structures - 33 Fire, Lightning, & Removal	@	100.00% =		42.21	
Material Sales Tax				4,012.47	2.20%
Coverage: Coverage A - Dwelling - 39 Smoke	@	18.29% =		733.86	
Coverage: Coverage A - Dwelling - 39 Smoke - Trees, Shrubs, and Landscaping	@	39.51% =		1,585.28	
Coverage: Coverage A - Other Structures - 33 Fire, Lightning, & Removal	@	42.20% =		1,693.33	
General Contractor Overhead				15,165.99	8.33%
Coverage: Coverage A - Dwelling - 39 Smoke	@	44.89% =		6,808.02	
Coverage: Coverage A - Dwelling - 39 Smoke - Trees, Shrubs, and Landscaping	@	28.18% =		4,273.66	
Coverage: Coverage A - Other Structures - 33 Fire, Lightning, & Removal	@	26.93% =		4,084.31	
General Contractor Profit				15,165.99	8.33%
Coverage: Coverage A - Dwelling - 39 Smoke	@	44.89% =		6,808.02	
Coverage: Coverage A - Dwelling - 39 Smoke - Trees, Shrubs, and Landscaping	@	28.18% =		4,273.66	
Coverage: Coverage A - Other Structures - 33 Fire, Lightning, & Removal	@	26.93% =		4,084.31	
Total				181,991.57	100.00%

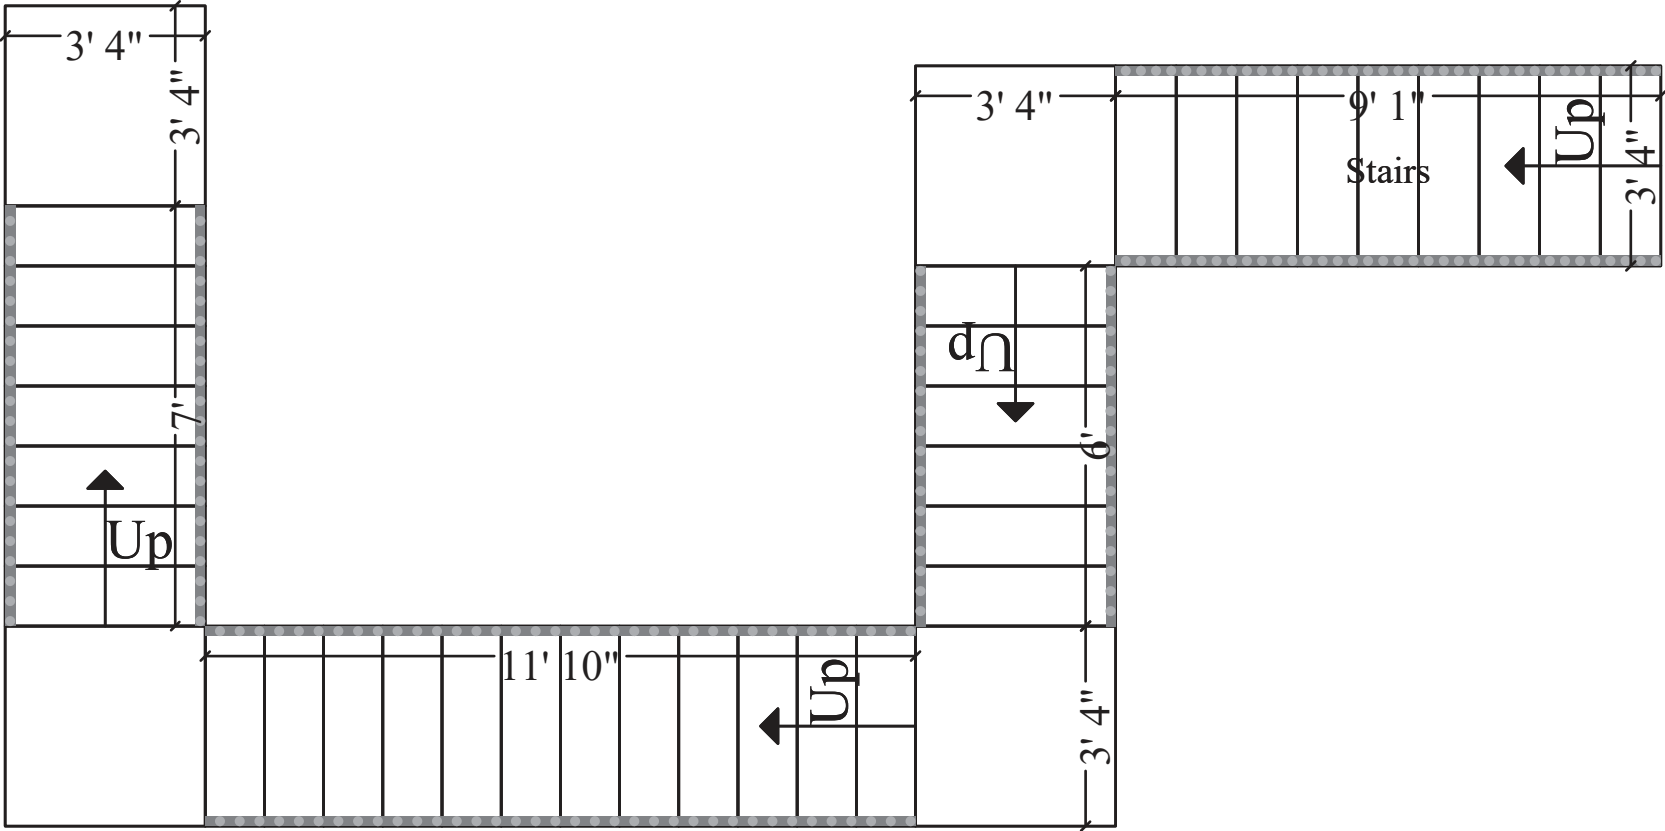

Main Level

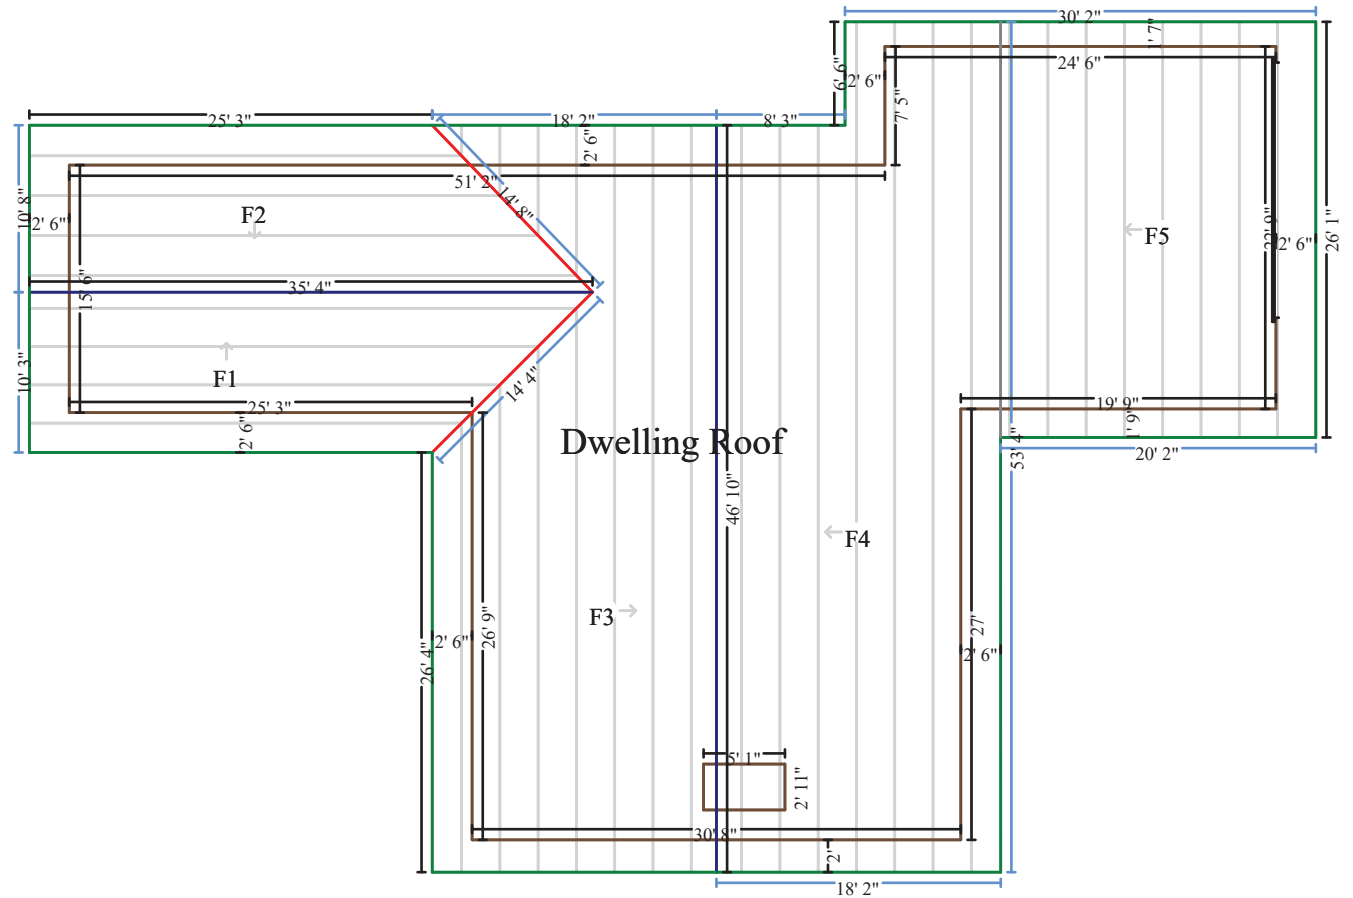

Date: 10/17/2025 4:32 PM

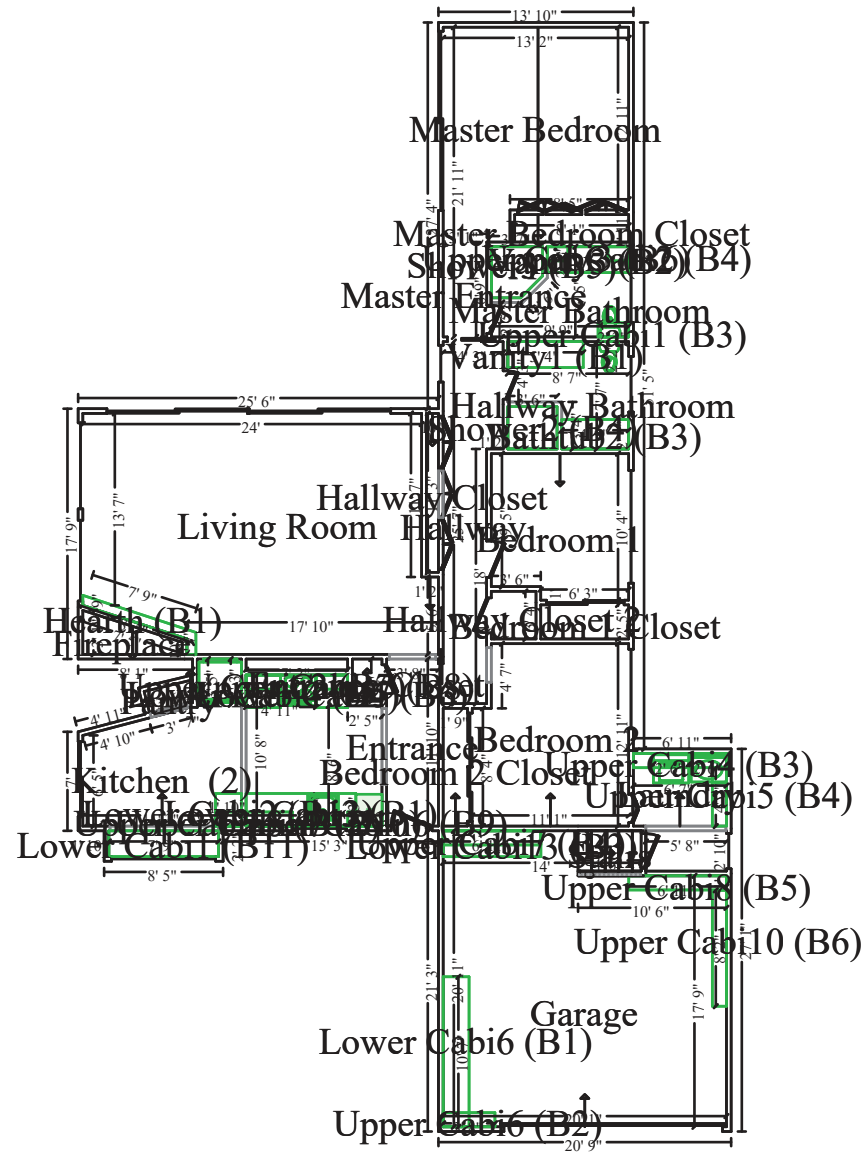

N
↑

Main Level