



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Insured: Kenneth Chen
Property: 1115 Lachman Ln
Pacific Palisades, CA 90272

Claim Rep.: Nick Cavalluzzi
Position: Executive Adjuster
Company: Apex Public Adjusters Inc.
Business: 550 N. Brand Blvd
Glendale, CA

Business: (818) 388-1070
E-mail: Nick@ApexAdjusters.com

Estimator: Jared Boergadine
Position: Executive Adjuster
Company: Apex Adjusters, Inc.
Business: 550 N. Brand Blvd. Suite 950
Glendale, CA 91203

Business: (818) 720-9345
E-mail: Jared@ApexAdjusters.com

Claim Number: 75-79J8-65X

Policy Number: 75-C9-A181-5

Type of Loss: Fire

Coverage	Deductible	Policy Limit
Dwelling	\$0.00	\$1,273,500.00
Dwelling - Debris Removal	\$0.00	\$63,675.00
Dwelling - Code Upgrade	\$0.00	\$127,350.00
Dwelling - Extended Limit	\$0.00	\$254,700.00
Contents	\$0.00	\$955,125.00
Trees, Plants & Shrubs	\$0.00	\$63,675.00
Other Structures	\$3,000.00	\$127,350.00

Date of Loss: 1/7/2025 12:00 AM
Date Inspected:

Date Received:
Date Entered: 3/29/2025 9:24 AM

Price List: CALA8X_APR25
Restoration/Service/Remodel
Estimate: 1115_LACHMAN_APEX_2

Depreciate Material: Yes
Depreciate Non-material: Yes
Depreciate Removal: No
Depreciate O&P: No
Depreciate Taxes: Yes



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

The Following Estimate is based upon a Physical Site Inspection by Apex Adjusters.

Information was also gathered from an interview with owners and available information from web sites as needed.

Approved Architectural & Engineered drawings were not available at the time of inspection.

The purpose of this report is to establish a Scope of Work for use by the insured and/or the insured's representative company.

All items in this scope of work are based on the current conditions at the time of inspection.

Any hidden or unforeseen damages that may be uncovered during demolition and reconstruction are excluded from this estimate and will need to be added or supplemented.

Code upgrade requirements from the local building department are not included in this scope of work unless specified and may need to be added or supplemented.

This estimate may need to be revised as additional information becomes available.

Prices are considered current for approximately 1 month and will need to be reviewed and revised every month to be current.

Xactimate estimating software is a tool used as a guideline to produce pricing for this scope of work.

Components and prices may need to be adjusted to account for material availability and scarcity from wide spread disaster events, current market labor conditions, sub contractor pricing and local market supply and demand.

This scope of work is solely for the purposes of establishing work required to return the property to it's pre-loss condition, this is not a solicitation or bid to contract for construction work.

This estimate and report and all its contents are the sole property of Apex Adjusters.

Any alterations, changes, additions, or deletions to this estimate are strictly prohibited unless performed by Apex Adjusters.



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

1115_LACHMAN_APEX_2

Abatement

CAT	SEL	ACT DESCRIPTION						
	CALC	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
1. HMR	BIDITM	+ ALLIANCE Lead structural abatement						
	1	1.00 EA	[*EN]					AS INCURRED
2. HMR	BIDITM	+ ALLIANCE Lead content abatement						
	1	1.00 EA	[*EN]					AS INCURRED
Totals: Abatement						0.00	0.00	0.00

Contents

CAT	SEL	ACT DESCRIPTION							
		CALC	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
3. CON	BIDITM	+ Content Manipulation (Bid Item) - West Coast Contents Packout /Storage x 4 months/ Pack Back							
	1	1.00 EA	[*EN]		AS INCURRED				
4. USR	MISC	+ Total Loss Inventory							
	1	1.00 EA	[NH]		PENDING				
Totals: Contents							0.00	0.00	0.00

General

CAT	SEL	ACT DESCRIPTION							
		CALC	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Permits & Fees:-----									
5. FEE	TIPF		+ Building Permits						
		1	1.00 EA	[EN]					OPEN
Based on a 1% projection of Job Costs for Permits & Fees									
-----Site Conditions-----									
6. TMP	TLT		+ Temporary toilet (per month)						
		5	5.00 MO		0.00+	225.00 =	0.00	225.00	1,350.00
7. TMP	HWS		+ Temporary hand washing station (per month)						
		5	5.00 MO		0.00+	247.00 =	0.00	247.00	1,482.00



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CONTINUED - General

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
8. DMO	DUMP>	- Dumpster load - Approx. 30 yards, 5-7 tons of debris						
	4	4.00 EA		1,168.94+	0.00 =	0.00	935.16	5,610.92
9. LAB	DMO	+ Daily Job Site Clean Up Laborer & Runner - per hour						
	2.5*4*5	50.00 HR		0.00+	65.19 =	0.00	651.90	3,911.40
30 minutes per day for 5 days per week, 4 weeks per month for 4 months.								
10. LAB	SUPERR	+ Residential Supervision / Project Management - per hour						
	15*4*5	300.00 HR		0.00+	86.09 =	0.00	5,165.40	30,992.40

On Site Project Superintendent, 15 hours per week for 4 weeks per month for 4 months

Supervision is required by the CSLB license requirements that the Qualified licensee or a manager inspect every job site each day until complete. Supervision is not covered in Xactimate's O&P according to Xactimate's white pages. .

"Cal. Admin. Code tit. 16, § 823(a). "Direct supervision and control" "includes any one or any combination of the following activities: supervising construction, managing construction activities by making technical and administrative decisions, checking jobs for proper workmanship, or direct supervision on construction job sites.

Section 7068 requires every license to have a qualifier, which may be a Sole Owner, Qualified Partner, Responsible Managing Officer (RMO), Responsible Managing Employee (RME), Responsible Managing Manager or Responsible Managing Member. The qualifier is the person who is listed in the Contractor State License Boards' (CSLB) personnel of record, has demonstrated his/her knowledge and experience through the CSLB's licensing process, and holds one or more license classifications.

UPDATE: CSLB, CSLB to Get Tough on RMO Abuses (Summer 2014) Starting on January 1, 2014, amended Section 7068.1 of California's Contractors State License Law, Bus. & Prof. Code §§ 7200 *et seq.*, requires licensees' qualifiers to exercise direct supervision and control over the licensees' operations to ensure compliance with California's Contractors State License Law. The amended law contemplates active involvement by the qualifier, and makes a violation of Section 7068.1 grounds for disciplinary action and a misdemeanor punishable by imprisonment in a county jail and/or a fine.

-----Final Cleaning-----

11. CLN	FINALR	+ Final cleaning - construction - Residential						
	5000	5000.00 SF					SEE X3.BUILD	
Includes Exterior areas								
12. CLN	WD	+ Clean window unit (per side) 10 - 20 SF						
	40	40.00 EA					SEE X3.BUILD	
13. CLN	BIDITM	+ Cleaning per X3 Build - Estimate #1038						
	1	1.00 EA [*EN]		0.00+	6,400.00 =	0.00	0.00	6,400.00

The line item applies to the deep cleaning per X3 Build

Deep cleaning of house and all windows

Totals: General						0.00	7,224.46	49,746.72
------------------------	--	--	--	--	--	-------------	-----------------	------------------

Dwelling

Electrical



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
-----Electrical Repair-----								
14. ELS	SHOMEB	+ Home management system (Smart home) accessories per X3 Build - Estimate #1056						
	1	1.00 EA [*EN]		0.00+	24,500.00 =	0.00	0.00	24,500.00
The line item applies to Electrical repairs for the customer's Smart Home system per X3 Build								
Electrical: lighting and curtain automation controls, replace all Lutron Radio RA switches and LCD displays which were damaged. Price includes labor and materials								
15. ELE	BIDITM	+ Electrical low voltage repairs - X3 Build - Estimate #1038						
	1	1.00 EA [*EN]		0.00+	18,500.00 =	0.00	0.00	18,500.00
The line item applies low voltage repairs per X3 Build								
Electrical & Low voltage - replacing all burned lighting controls								
16. ELE	BIDITM	+ Electrical repair per X3 - Estimate #1062						
	1	1.00 EA [*EN]		0.00+	11,060.00 =	0.00	0.00	11,060.00
The line item includes:								
1. Electrical - replace electrical lines that have shorted due to the fire. New runs from the main panel to multiple outlets and switches								
2. Drywall - patch and paint holes made due to new lines								
17. ELE	WIREMC	+ Wire - average residence - metal clad copper wiring						
	3556.11	3556.11 SF						SEE X3.BUILD
18. ELE	LVB	& R&R Exterior low voltage box						
	2	2.00 EA						SEE X3.BUILD
19. ELE	OLR	& R&R Phone/low voltage outlet rough-in						
	2	2.00 EA						SEE X3.BUILD
20. ELE	OSC	& R&R Outlet or switch - ext. mtd. - Commercial (weatherproof)						
	3	3.00 EA						SEE X3.BUILD
-----Solar Electrical System-----								
21. ELS	BIDITM	+ Electrical - Special Systems Solar system repair per X3 Build - Estimate # 1038						
	1	1.00 EA [*EN]		0.00+	18,600.00 =	0.00	0.00	18,600.00
The line item applies to the solar panel repairs per X3 build								
Solar - repair , burnt solar equipment								
22. ELS	EVCS+	& R&R Electric vehicle charging station - 240V - High grade						
	1	1.00 EA		80.71+	1,891.46 =	143.29	423.10	2,538.56
In Garage								
23. ELS	SOLARP>	& R&R Solar electric panel - 250 to 450 watt						
	23	23.00 EA						SEE X3.BUILD
On Roof								
24. ELS	SOLMHRS	+ Solar panel- mounting hardware- Detach & reset (per panel)						
	23	23.00 EA						SEE X3.BUILD
25. ELS	BIDITM	+ Electrical - Special Systems (Bid Item) SOLAR BATTERY, INVERTER, DUCTING						
	1	1.00 EA [N]						PENDING
Left Elevation mounted to Exterior wall								



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CONTINUED - Electrical

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
Totals: Electrical						143.29	423.10	75,198.56

Plumbing

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
26. PLM	PT	+ Plumbing/gas line air pressure test						
		1 1.00 EA		0.00+	214.36 =	0.00	42.88	257.24
27. PLM	PTD	+ Plumbing/drain line water pressure test						
		1 1.00 EA		0.00+	509.10 =	0.00	101.82	610.92
28. FPS	DS	+ Drain and re-charge wet fire suppression system						
		1 1.00 EA		0.00+	313.29 =	0.00	62.66	375.95
29. PLM	MISC	& R&R X3 Estimate #1038 - Navien tankless water heater						
		1 1.00 EA [EN]		0.00+	6,860.00 =	0.00	0.00	6,860.00
<u>No 3: Plumbing: new tankless water heater (Navian) with circulating pump</u>								
Totals: Plumbing						0.00	207.36	8,104.11

HVAC

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
30. HVC	AC>>+	& R&R Central air conditioning system - 5 ton - 14-15 SEER						
		2 2.00 EA		367.07+	5,598.95 =	694.70	2,525.34	15,152.08
31. HVC	FRHZH35	& R&R Furnace - horizontal - forced air - high effic.135,000 BTU						
		1 1.00 EA		103.45+	3,911.79 =	249.04	852.86	5,117.14
32. HVC	DCT>>	+ Ductwork system - hot or cold air - 2200 to 2500 SF home						
		2 2.00 EA		0.00+	8,722.37 =	682.68	3,625.48	21,752.90
-----Equipment-----								
33. EQU	CRANE	+ Crane and operator - 14 ton capacity - 65' extension boom						
		8 8.00 HR		0.00+	180.00 =	0.00	288.00	1,728.00
Totals: HVAC						1,626.42	7,291.68	43,750.12



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Doors/Windows

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
34. WDP	BIDITM	+ Windows -Windows & Sliding Patio Doors (Bid Item) X3 Build Inc Estimate #1038 - Windows DEMO						
	1	1.00 EA [*EN]		0.00+	12,300.00 =	0.00	0.00	12,300.00
No 4: Demo: remove all existing window and doors and haul off								
35. WDP	BIDITM	+ Windows -Windows & Sliding Patio Doors (Bid Item) X3 Build Inc Estimate #1038						
	1	1.00 EA [*EN]		0.00+	119,157.00 =	0.00	0.00	119,157.00
No 5: Exterior doors & windows (materials) :replace all Milgard windows & doors with like kind								
No 6: Installation including sheet metal pans for all doors								
36. WDT	SHADM	& R&R Motorized shades						
	62*10	620.00 SF						SEE BID
37. WDT	BLC2>>+	& R&R Window blind - double cell - Hunter Douglas Custom						
	10	10.00 EA [*]						SEE BID
38. WDT	BIDITM	+ Window Treatments per Home Carpet & Window treatments						
	1	1.00 EA [*E]		0.00+	23,190.06 =	0.00	4,638.02	27,828.08

The line item applies to the widow treatment repairs per Home Carpet & Window Treatments

Scope of work:

Master - 3 Drapery pairs and valances, fabric @149.00 per yard, black out lined

Boy's Room - 3 Drapery pairs, and valances, fabric @95.00 per yard, black out lined

Fabric: 16,836.00

Lining: 1,389.00

Maufactura: 7,098.00

Shipping: 200.00

Installation: 1,800.00

Tax: 1,776.06

Total: 23,190.06

39. WDT	BIDITM	+ Window Treatment s per Home Carpet & Windows Treatments						
	1	1.00 EA [*E]		0.00+	54,224.29 =	0.00	10,844.86	65,069.15

This line items applies to the repairs for shades drapery & blinds per Home Carpet & Window Treatments.

Kitchen: 2 Duettes, Duolite, UltraGlide

Entry: 3 Roller shades, screens, with facias, manual

Dining: 4 roller shades, screens, with facias, PowerView

Living: 2 Rollers, screens, with facias, PowerView

Office: 3 Duettes Doulite, UltraGlide

MasterBath: 1 Duette, Duolite, PowerView

Master: 1 Rollersshade, screen , with facia, PowerView

2 Roller shades, scree with facia, PowerView

Boy's: 1 Roller shade, screen with facia, PowerView

2 Roller shades, screen with facia, manual

Boy's Bath: 2 Duettes, Doulite, UltraGlide

Shades: \$45,603.00

Tax: \$4,446.29

Installation: \$2,900.00

Shipping: \$575.00

Oversize Shipping: \$200.00

Measure: \$500.00

Total: \$54,224.29



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CONTINUED - Doors/Windows

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
40. WDT	DRAPRH	+ Window drapery - remove and rehang - per hour						
	2	2.00 HR		0.00+	86.38 =	0.00	34.56	207.32
Master Bedroom								
Totals: Doors/Windows						0.00	15,517.44	224,561.55

Appliances


CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Kitchen-----								
41. APP	RGG+++	& R&R Range - freestanding - gas - Deluxe grade						
	1	1.00 EA [*]		30.55+	12,399.00 =	536.25	2,593.18	15,558.98
42. APP	DW+++	& R&R Dishwasher - Deluxe grade						
	1	1.00 EA [*]		40.63+	2,499.00 =	174.92	542.90	3,257.45
43. APP	GD+	& R&R Garbage disposal / disposer - High grade						
	1	1.00 EA		37.94+	384.92 =	23.89	89.34	536.09
44. HVC	WINE	& R&R Cooling unit for wine room - Small						
	1	1.00 EA [*]		21.92+	3,799.00 =	105.30	785.24	4,711.46
45. APP	RFBIXDX	& R&R Built-in refrigerator - 48" - Deluxe grade						
	1	1.00 EA [*]		194.19+	12,500.00 =	1,047.54	2,748.34	16,490.07
46. APP	HDSS>+	& R&R Range hood - stainless steel - oversized - High grade						
	1	1.00 EA		45.52+	3,395.40 =	314.94	751.16	4,507.02
47. APP	HDI	& R&R Range hood - add on cost for ceiling mount/island hood						
	1	1.00 EA		37.94+	427.57 =	36.86	100.48	602.85
-----Laundry Room-----								
48. APP	WASF++	& R&R Washer/Washing Machine - Front-loading - Premium grade						
	1	1.00 EA		40.63+	2,329.86 =	214.50	517.00	3,101.99
49. APP	DRYG++	& R&R Dryer - Gas - Premium grade						
	1	1.00 EA		30.55+	1,762.32 =	156.00	389.78	2,338.65
50. PLM	WSBOX	& R&R Refrigerator/icemaker water supply box with valve						
	1	1.00 EA		7.59+	167.84 =	6.44	36.36	218.23
Totals: Appliances						2,616.64	8,553.78	51,322.79

Main Level

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Main Level

CAT	SEL	ACT DESCRIPTION						TOTAL
	CALC	QTY	RESET	REMOVE	REPLACE	TAX	O&P	
51. DRY	BIDITM	+ Drywall (Bid Item) X3 Build Estimate No 1038 - #7 - Drywall repair around doors/windows						
	1	1.00 EA	[*EN]	0.00+	19,000.00 =	0.00	0.00	19,000.00
<u>No. 7: Drywall: demo and patch drywall around all doors & windows</u>								
52. DRY	5/8-	& R&R 5/8" drywall - hung, taped, ready for texture						
	862	862.00 SF						SEE X3.BUILD
Gain Access to replace ductwork and insulation in very small attic spaces								
53. DRY	PATCHJ	+ Tape joint for new to existing drywall - per LF						
	263.61	263.61 LF						SEE X3.BUILD
54. DRY	TEX++	+ Texture drywall - smooth / skim coat						
	1000	1000.00 SF						SEE X3.BUILD
Total: Main Level						0.00	0.00	19,000.00



Entry/Foyer

Height: 10'

228.83 SF Walls	73.16 SF Ceiling
301.99 SF Walls & Ceiling	73.16 SF Floor
8.13 SY Flooring	19.42 LF Floor Perimeter
36.75 LF Ceil. Perimeter	

Door

3' 1" X 8'

Opens into GUEST_BATH

Door


3' 1" X 8'

Opens into OFFICE

Door

5' 4" X 8'

Opens into Exterior



Subroom: Offset (1)

Height: 8'

40.67 SF Walls	13.61 SF Ceiling
54.28 SF Walls & Ceiling	13.61 SF Floor
1.51 SY Flooring	5.08 LF Floor Perimeter
5.08 LF Ceil. Perimeter	

Missing Wall

5' 10" X 8'

Opens into ENTRY_FOYER2

Missing Wall

5' 10" X 8'

Opens into ROOM1

CAT	SEL	ACT DESCRIPTION						
	CALC	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL

-----Ceiling-----


550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Entry/Foyer

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
55. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	86.77 SF		0.00+	2.09 =	3.05	36.90	221.30
-----Walls-----								
56. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	269.50 SF		0.00+	2.09 =	9.46	114.56	687.28
57. FNC	B6H	& R&R Baseboard - 6" hardwood						
	PF	24.50 LF		0.75+	10.64 =	17.37	59.30	355.73
58. PNT	BS>	+ Stain & finish baseboard - oversized						
	PF	24.50 LF		0.00+	2.92 =	0.84	14.46	86.84
59. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	24.50 LF		0.00+	2.20 =	0.65	10.92	65.47
-----Floor-----								
60. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	86.77 SF		0.45+	0.00 =	0.59	7.94	47.58
61. FCT	MAT	& R&R Tile mat - uncoupling membrane						
	F	86.77 SF		1.39+	6.90 =	22.17	148.30	889.79
62. FCT	AV+	& R&R Tile floor covering - High grade						
	F	86.77 SF		3.80+	20.19 =	69.03	430.12	2,580.77
63. FCT	MORTAR	& R&R Mortar bed for tile floors						
	F	86.77 SF		2.05+	7.22 =	19.88	164.86	989.10
64. FCT	SEALG	+ Grout sealer						
	F	86.77 SF		0.00+	2.42 =	1.61	42.32	253.91
-----Doors/Windows/Fixtures-----								
65. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	6	6.00 EA		16.90+	234.42 =	61.37	313.86	1,883.15
66. ELE	SMOKE++	& R&R Smoke detector - Premium grade						
	1	1.00 EA		16.83+	193.86 =	14.14	44.96	269.79
67. DOR	XPD8++	& R&R Ext. double door - pnl hardwood - 8' Prem. grade no casing						
	1	1.00 EA					SEE X3.BUILD	
68. WDW	P<<++	& R&R Wood window - picture (fixed), 3-11 sf, Premium grade						
	1	1.00 EA					SEE X3.BUILD	
Above entry door								
69. FNC	DOP>+	& R&R Door opening (jamb & casing) - 36"to60"wide - stain grade						
	1	1.00 EA		9.54+	288.33 =	19.65	63.50	381.02
70. FNH	DBX+++	+ Door lockset & deadbolt - exterior - Deluxe grade						
	1	1.00 EA		0.00+	452.15 =	40.18	98.48	590.81
71. FNH	WS	+ Door weather stripping						
	1	1.00 EA		0.00+	40.24 =	0.99	8.24	49.47

Totals: Entry/Foyer
280.98 1,558.72 9,352.01

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539



Office

Height: Sloped

334.40 SF Walls	177.42 SF Ceiling
511.81 SF Walls & Ceiling	176.67 SF Floor
19.63 SY Flooring	28.83 LF Floor Perimeter
54.18 LF Ceil. Perimeter	

Door


3' 1" X 8'

Opens into ENTRY_FOYER2

Door

3' 1" X 8'

Opens into GUEST_BATH



Subroom: Office Closet (2)


Height: 8'

178.00 SF Walls	39.94 SF Ceiling
217.94 SF Walls & Ceiling	39.94 SF Floor
4.44 SY Flooring	22.25 LF Floor Perimeter
25.33 LF Ceil. Perimeter	

Door

3' 1" X 8'

Opens into OFFICE



Subroom: Offset (1)

Height: 10'

169.17 SF Walls	43.33 SF Ceiling
212.50 SF Walls & Ceiling	43.33 SF Floor
4.81 SY Flooring	21.42 LF Floor Perimeter
21.42 LF Ceil. Perimeter	

Missing Wall

16' X 10'

Opens into OFFICE

Window

9' X 5'


Opens into Exterior

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
-----Ceiling-----								
72. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	260.69 SF		0.00+	2.09 =	9.15	110.80	664.79
-----Walls-----								
73. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	681.56 SF		0.00+	2.09 =	23.92	289.68	1,738.06
74. PNT	BS>	+ Stain & finish baseboard - oversized						
	PF	72.50 LF		0.00+	2.92 =	2.47	42.84	257.01
75. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	72.50 LF		0.00+	2.20 =	1.91	32.28	193.69
-----Floor-----								

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CONTINUED - Office

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
76. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	259.94 SF		0.45+	0.00 =	1.77	23.76	142.50
-----Doors/Windows/Fixtures-----								
77. PNT	OP>	+ Paint door or window opening - Large - 2 coats (per side)						
	1	1.00 EA		0.00+	60.61 =	0.70	12.26	73.57
78. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	7	7.00 EA		16.90+	234.42 =	71.60	366.16	2,197.00
79. ELE	COSM++	& R&R Combo CO/Smoke detector - Premium grade (smart home comp.)						
	1	1.00 EA		16.83+	244.73 =	19.09	56.12	336.77
80. LIT	HG++	& R&R Hanging light fixture - Premium grade						
	1	1.00 EA		19.09+	177.11 =	10.07	41.26	247.53
81. DOR	FRRS	+ French door - Detach & reset						
	2	2.00 EA		0.00+	126.05 =	0.23	50.46	302.79
82. FNH	DORH	R Detach & Reset Door knob - interior						
	2	2.00 EA	34.34	0.00+	0.00 =	0.00	13.74	82.42
83. PNT	FRS	+ Stain & finish French door slab only - (per side)						
	4	4.00 EA		0.00+	235.96 =	4.40	189.64	1,137.88
84. PNT	DORTS	+ Stain & finish door/window trim & jamb (per side)						
	4	4.00 EA		0.00+	67.23 =	3.20	54.42	326.54
-----Closet-----								
85. FNC	CLOSM+	& R&R Closet Organizer - Melamine - High grade						
	2'9+4'7	7.33 LF		11.38+	155.15 =	44.99	253.14	1,518.80
Totals: Office						193.50	1,536.56	9,219.35



Guest Bath

Height: 8'


148.67 SF Walls	49.76 SF Ceiling
198.42 SF Walls & Ceiling	40.93 SF Floor
4.55 SY Flooring	12.00 LF Floor Perimeter
24.75 LF Ceil. Perimeter	

Door 3' 1" X 8'
Door 3' 1" X 8'

Opens into OFFICE
Opens into ENTRY_FOYER2

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
CALC	QTY							
-----Ceiling-----								
86. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	49.76 SF		0.00+	2.09 =	1.75	21.16	126.91
-----Walls-----								
87. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	148.67 SF		0.00+	2.09 =	5.22	63.18	379.12
88. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PC	24.75 LF		0.00+	2.20 =	0.65	11.04	66.14
-----Floor-----								
89. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	40.93 SF		0.45+	0.00 =	0.28	3.74	22.44
90. FCT	SEALG	+ Grout sealer						
	F+PF	52.93 SF		0.00+	2.42 =	0.98	25.82	154.89
-----Doors/Windows/Fixtures-----								
91. DOR	FRRS	+ French door - Detach & reset						
	2	2.00 EA		0.00+	126.05 =	0.23	50.46	302.79
92. FNH	DORH	R Detach & Reset Door knob - interior						
	2	2.00 EA	34.34	0.00+	0.00 =	0.00	13.74	82.42
93. PNT	FRS	+ Stain & finish French door slab only - (per side)						
	4	4.00 EA		0.00+	235.96 =	4.40	189.64	1,137.88
94. PNT	DORTS	+ Stain & finish door/window trim & jamb (per side)						
	4	4.00 EA		0.00+	67.23 =	3.20	54.42	326.54
95. LIT	BAR4+	& R&R Light bar - 4 lights - High grade						
	1	1.00 EA		30.34+	228.85 =	15.11	54.86	329.16
96. ELE	FAN+	& R&R Exhaust fan - High grade						
	1	1.00 EA		22.76+	409.99 =	18.47	90.26	541.48
Totals: Guest Bath						50.29	578.32	3,469.77


Living Room/Dining Room
Height: 11'


298.13 SF Walls	340.68 SF Ceiling
638.81 SF Walls & Ceiling	329.43 SF Floor
36.60 SY Flooring	19.42 LF Floor Perimeter
67.79 LF Ceil. Perimeter	

Door	11' 4" X 9' 7"	Opens into Exterior
Door	9' 7" X 9' 7"	Opens into Exterior

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Subroom: Offset 2 (3)

Height: 9'



40.50 SF Walls
57.00 SF Walls & Ceiling
1.83 SY Flooring
4.50 LF Ceil. Perimeter

16.50 SF Ceiling
16.50 SF Floor
4.50 LF Floor Perimeter

Missing Wall

7' 4" X 9'

Opens into LIVING_ROOM_


Missing Wall

7' 4" X 9'

Opens into ROOM1

Subroom: Fireplace (1)

Height: 9'



40.50 SF Walls
51.75 SF Walls & Ceiling
4.50 LF Ceil. Perimeter

11.25 SF Ceiling

Missing Wall

5' X 9'

Opens into ROOM1

Missing Wall

5' X 9'

Opens into LIVING_ROOM_

Subroom: Offset 1 (2)

Height: 9'



40.50 SF Walls
110.25 SF Walls & Ceiling
7.75 SY Flooring
4.50 LF Ceil. Perimeter

69.75 SF Ceiling
69.75 SF Floor
4.50 LF Floor Perimeter

Missing Wall

31' X 9'

Opens into ROOM1

Missing Wall

15' 1 1/2" X 9'


Opens into LIVING_ROOM_

Missing Wall

15' 10 1/2" X 9'

Opens into DINING_ROOM

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539


Subroom: Dining Room (4)
Height: 11'

96.06 SF Walls	191.16 SF Ceiling
287.22 SF Walls & Ceiling	191.16 SF Floor
21.24 SY Flooring	2.58 LF Floor Perimeter
43.79 LF Ceil. Perimeter	

Door	5' 8" X 9' 7"	Opens into Exterior
Door	5' 8" X 9' 7"	Opens into Exterior
Missing Wall	15' 10 1/2" X 11'	Opens into OFFSET_1
Missing Wall	12' 1/2" X 11'	Opens into LIVING_ROOM_
Door	7' X 9' 7"	Opens into Exterior
Door	7' X 9' 7"	Opens into Exterior


CAT	SEL	ACT DESCRIPTION		RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY							
-----Ceiling-----									
97. FCW	FIN+		+ Sand, stain, and finish wood ceiling						
	C	629.34 SF			0.00+	6.56 =	72.41	840.18	5,041.06
98. FCW	FINDS		+ Add for dustless floor sanding						
	C	629.34 SF			0.00+	1.00 =	0.00	125.86	755.20
99. FCW	FINADD		+ Additional coats of finish (per coat)						
	C	629.34 SF			0.00+	1.47 =	17.79	188.58	1,131.50
100. FCW	LAB		+ Wood Floor Covering Installer - per hour						
	16	16.00 HR			0.00+	106.93 =	0.00	342.18	2,053.06
Additional labor for difficulty of finishing a curved wood ceiling									
-----Walls-----									
101. FNC	B6H		& R&R Baseboard - 6" hardwood						
	PF	31.00 LF			0.75+	10.64 =	21.97	75.02	450.08
102. PNT	BS>		+ Stain & finish baseboard - oversized						
	PF	31.00 LF			0.00+	2.92 =	1.06	18.32	109.90
103. PNT	SP2		+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	515.69 SF			0.00+	2.09 =	18.10	219.18	1,315.07
104. PNT	MASKLF		+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	31.00 LF			0.00+	2.20 =	0.82	13.80	82.82
-----Floor-----									
105. DMO	MASKSFP		- Floor protection - heavy paper and tape						
	F	606.84 SF			0.45+	0.00 =	4.14	55.44	332.66
106. FCT	MAT		& R&R Tile mat - uncoupling membrane						
	F	606.84 SF			1.39+	6.90 =	155.02	1,037.14	6,222.87
107. FCT	AV+		& R&R Tile floor covering - High grade						
	F	606.84 SF			3.80+	20.19 =	482.80	3,008.18	18,049.07
108. FCT	MORTAR		& R&R Mortar bed for tile floors						
	F	606.84 SF			2.05+	7.22 =	139.04	1,152.88	6,917.32

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Living Room/Dining Room

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
109. FCT	SEALG	+ Grout sealer						
	F	606.84 SF		0.00+	2.42 =	11.24	295.96	1,775.75
-----Doors/Windows/Fixtures-----								
110. LIT	SCON++	& R&R Light fixture - wall sconce - Premium grade						
	2	2.00 EA		12.64+	328.67 =	53.63	147.24	883.49
111. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	24	24.00 EA		16.90+	234.42 =	245.49	1,255.44	7,532.61
112. SPE	TSIW+	& R&R In-wall / In-ceiling speaker - High grade						
	2	2.00 EA		7.59+	468.37 =	74.49	205.28	1,231.69
113. LIT	RUN	& R&R LED light runner - channel-mounted rope light						
	5*6'6	32.50 LF		0.65+	14.81 =	12.04	102.88	617.38
-----Fireplace-----								
114. PNT	OP	+ Paint door or window opening - 2 coats (per side)						
	6	6.00 EA		0.00+	51.53 =	3.58	62.56	375.32
115. PNT	MASKSFP	+ Floor protection - heavy paper and tape						
	18+5'4*3+(3*2*2)	46.00 SF		0.00+	0.71 =	0.31	6.60	39.57
To cover opening and fireplace doors/countertop								
116. FPL	ELBOX	& R&R Electric fireplace insert, built-in, w/ heater- 33" to 39"						
	2	2.00 EA		142.23+	1,002.63 =	155.81	489.12	2,934.65
117. TIL	BMUD	& R&R Mortar bed for tile						
	125	125.00 SF		2.53+	14.04 =	21.08	418.48	2,510.81
118. TIL	MT+	& R&R Mosaic - ceramic/porcelain tile - High grade						
	125	125.00 SF		3.02+	34.10 =	197.07	967.42	5,804.49
Totals: Living Room/Dining Room						1,687.89	11,027.74	66,166.37

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539


Kitchen
Height: Tray

450.25 SF Walls	281.97 SF Ceiling
732.22 SF Walls & Ceiling	146.38 SF Floor
16.26 SY Flooring	8.46 LF Floor Perimeter
48.88 LF Ceil. Perimeter	

Window	5' X 3' 6"	Opens into Exterior
Window	6' X 3' 6"	Opens into Exterior
Missing Wall	7 1/2" X 10'	Opens into ROOM1
Missing Wall	14' 3 1/2" X 10'	Opens into ROOM1

CAT	SEL	ACT DESCRIPTION		RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY							
-----Ceiling Wood-----									
119. FCW	FIN+		+ Sand, stain, and finish wood ceiling						
	C	281.97 SF			0.00+	6.56 =	32.44	376.42	2,258.58
120. FCW	FINDS		+ Add for dustless floor sanding						
	80.63	80.63 SF			0.00+	1.00 =	0.00	16.12	96.75
121. FCW	FINADD		+ Additional coats of finish (per coat)						
	80.63	80.63 SF			0.00+	1.47 =	2.28	24.16	144.97
122. FCW	LAB		+ Wood Floor Covering Installer - per hour						
	8	8.00 HR			0.00+	106.93 =	0.00	171.08	1,026.52
123. PNT	MASKLF		+ Mask and prep for paint - plastic, paper, tape (per LF)						
	36.17	36.17 LF			0.00+	2.20 =	0.95	16.12	96.64
124. PNT	OP>		+ Paint door or window opening - Large - 2 coats (per side)						
	1	1.00 EA			0.00+	60.61 =	0.70	12.26	73.57
-----Ceiling Drywall-----									
125. PNT	SP2		+ Seal/prime (1 coat) then paint (2 coats) part of the ceiling						
	C-80.63	201.34 SF			0.00+	2.09 =	7.07	85.58	513.45
-----Walls-----									
126. PNT	SP2		+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	450.25 SF			0.00+	2.09 =	15.80	191.36	1,148.18
-----Floor-----									
127. DMO	MASKSFP		- Floor protection - heavy paper and tape						
	F	146.38 SF			0.45+	0.00 =	1.00	13.38	80.25
128. FCT	MAT		& R&R Tile mat - uncoupling membrane						
	F	146.38 SF			1.39+	6.90 =	37.39	250.18	1,501.06
129. FCT	AV+		& R&R Tile floor covering - High grade						
	F	146.38 SF			3.80+	20.19 =	116.46	725.62	4,353.73
130. FCT	MORTAR		& R&R Mortar bed for tile floors						
	F	146.38 SF			2.05+	7.22 =	33.54	278.10	1,668.58
131. FCT	SEALG		+ Grout sealer						
	F	146.38 SF			0.00+	2.42 =	2.71	71.38	428.33
-----Doors/Windows/Fixtures-----									

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Kitchen

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
132. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	13	13.00 EA		16.90+	234.42 =	132.97	680.04	4,080.17
133. SPE	TSIW+	& R&R In-wall / In-ceiling speaker - High grade						
	2	2.00 EA		7.59+	468.37 =	74.49	205.28	1,231.69
-----Cabinetry-----								
134. CAB	CUB+	& R&R Custom cabinets - base units - High grade						
	6'6"+2'6"+11'9"+9'2"+1'9"	31.67 LF		11.39+	478.54 =	1,286.64	3,360.54	20,163.26
135. CAB	CTQ+	& R&R Countertop - quartz/engineered stone - High grade						
	2*31.67	63.34 SF		8.18+	110.40 =	369.55	1,576.08	9,456.49
136. CAB	CTGMS	+ Add on for undermount sink cutout & polish - single basin						
	2	2.00 EA		0.00+	231.95 =	0.00	92.78	556.68
137. CAB	CUFH+	& R&R Custom cabinets - full height units - High grade						
	3	3.00 LF		13.67+	689.43 =	178.76	457.62	2,745.68
138. CAB	CUW36+	& R&R Custom cabinets - wall units - 36" tall - High grade						
	2'6"*6	15.00 LF		11.39+	346.21 =	415.86	1,156.00	6,935.86
139. CAB	LZS	+ Add for lazy susan						
	1	1.00 EA		0.00+	101.87 =	9.93	22.36	134.16
140. CAB	TRASHBN	+ Add for pull out trash bin						
	1	1.00 EA		0.00+	95.75 =	9.34	21.02	126.11
141. CAB	RLOUT	+ Add on cost for roll out shelves						
	6	6.00 EA		0.00+	81.80 =	47.85	107.74	646.39
-----Plumbing-----								
142. PLM	SNKDR+	+ Sink drain assembly with stop - High grade						
	2	2.00 EA		0.00+	76.95 =	7.41	32.26	193.57
143. PLM	EGSV	& R&R Earthquake gas shut-off valve						
	1	1.00 EA		9.49+	165.31 =	12.15	37.40	224.35
144. PLM	FAU++	R Detach & Reset Sink faucet - Kitchen - Premium grade						
	2	2.00 EA	149.84	0.00+	0.00 =	0.00	59.94	359.62
145. PLM	SNK++	R Detach & Reset Sink - single - Premium grade						
	2	2.00 EA	187.63	0.00+	0.00 =	0.16	75.10	450.52
Totals: Kitchen						2,795.45	10,115.92	60,695.16

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539


Hallway

Height: 11' 6"



682.83 SF Walls	274.19 SF Ceiling
957.01 SF Walls & Ceiling	274.19 SF Floor
30.47 SY Flooring	44.08 LF Floor Perimeter
117.08 LF Ceil. Perimeter	

Missing Wall	7' 4" X 11' 6"	Opens into OFFSET_2
Missing Wall	5' X 11' 6"	Opens into FIREPLACE
Missing Wall	31' X 11' 6"	Opens into OFFSET_1
Door	4' 1" X 9' 7"	Opens into Exterior
Missing Wall	14' 3 1/2" X 11' 6"	Opens into KITCHEN
Missing Wall	7 1/2" X 11' 6"	Opens into KITCHEN
Missing Wall	5' 10" X 11' 6"	Opens into OFFSET



Subroom: Hallway (1)

Height: 8'

282.11 SF Walls	120.73 SF Ceiling
402.84 SF Walls & Ceiling	120.73 SF Floor
13.41 SY Flooring	33.63 LF Floor Perimeter
45.71 LF Ceil. Perimeter	

Door	3' X 7'	Opens into BEDROOM_1
Door	3' X 7'	Opens into BEDROOM_2
Door	3' X 7'	Opens into LAUNDRY_ROOM
Door	3' 1" X 6' 8"	Opens into MASTER_BEDRO
Missing Wall	4' 10" X 8'	Opens into ROOM1


CAT	SEL	ACT DESCRIPTION							
		CALC	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Ceiling-----									
146. PNT	SP2		+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
		C	394.92 SF		0.00+	2.09 =	13.86	167.86	1,007.10
147. PNT	LAB		+ Painter - per hour						
		4	4.00 HR [*]		0.00+	169.18 =	0.00	135.34	812.06
To paint the (2) ledges on either side of the hallway at the top of the wall									
-----Walls-----									
148. PNT	SP2		+ Seal/prime (1 coat) then paint (2 coats) the walls						
		W	964.94 SF		0.00+	2.09 =	33.87	410.12	2,460.71
149. FNC	B6H		& R&R Baseboard - 6" hardwood						
		PF	77.71 LF		0.75+	10.64 =	55.08	188.04	1,128.23

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Hallway

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
150. PNT	BS>	+ Stain & finish baseboard - oversized						
	PF	77.71 LF		0.00+	2.92 =	2.65	45.92	275.48
151. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	77.71 LF		0.00+	2.20 =	2.05	34.62	207.63
-----Floor-----								
152. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	394.92 SF		0.45+	0.00 =	2.69	36.08	216.48
153. FCT	MAT	& R&R Tile mat - uncoupling membrane						
	F	394.92 SF		1.39+	6.90 =	100.88	674.96	4,049.73
154. FCT	AV+	& R&R Tile floor covering - High grade						
	F	394.92 SF		3.80+	20.19 =	314.20	1,957.66	11,745.99
155. FCT	MORTAR	& R&R Mortar bed for tile floors						
	F	394.92 SF		2.05+	7.22 =	90.49	750.28	4,501.68
156. FCT	SEALG	+ Grout sealer						
	F	394.92 SF		0.00+	2.42 =	7.32	192.60	1,155.63
-----Doors/Windows/Fixtures-----								
157. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	14	14.00 EA		16.90+	234.42 =	143.20	732.34	4,394.02
158. LIT	SCON++	& R&R Light fixture - wall sconce - Premium grade						
	3	3.00 EA		12.64+	328.67 =	80.44	220.86	1,325.23
159. ELE	SMOKE+	& R&R Smoke detector - High grade						
	1	1.00 EA		16.83+	121.12 =	7.05	29.00	174.00
160. HVC	TS++	& R&R Thermostat - Premium grade						
	1	1.00 EA		10.83+	281.60 =	13.80	61.24	367.47
161. ELE	SECP+	& R&R Security system - control panel - High grade						
	3	3.00 EA		5.72+	1,032.89 =	64.35	636.06	3,816.24
Totals: Hallway						931.93	6,272.98	37,637.68

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539


Master Bedroom
Height: Sloped

458.41 SF Walls	374.01 SF Ceiling
832.42 SF Walls & Ceiling	371.03 SF Floor
41.23 SY Flooring	34.92 LF Floor Perimeter
78.67 LF Ceil. Perimeter	

Door	6' 2" X 8'	Opens into MASTER_BATH
Door	3' 1" X 6' 8"	Opens into HALLWAY
Door	5' X 8'	Opens into M_CLOSET_HI
Door	6' X 8'	Opens into M_CLOSET_HE
Window	3' X 6'	Opens into Exterior
Window	3' X 6'	Opens into Exterior

Subroom: Offset (1)
Height: 9'


149.00 SF Walls	35.84 SF Ceiling
184.84 SF Walls & Ceiling	35.84 SF Floor
3.98 SY Flooring	15.33 LF Floor Perimeter
26.33 LF Ceil. Perimeter	


Missing Wall	23' 3" X 9'	Opens into MASTER_BEDRO
Door	11' X 8'	Opens into Exterior

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
-----Ceiling-----								
162. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	409.85 SF		0.00+	2.09 =	14.39	174.20	1,045.18
-----Walls-----								
163. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	607.41 SF		0.00+	2.09 =	21.32	258.16	1,548.97
164. PNT	BS>	+ Stain & finish baseboard - oversized						
	PF	50.25 LF		0.00+	2.92 =	1.72	29.68	178.13
165. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	50.25 LF		0.00+	2.20 =	1.32	22.38	134.25
-----Floor-----								
166. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	406.88 SF		0.45+	0.00 =	2.78	37.18	223.06
-----Doors/Windows/Fixtures-----								
167. DOR	FRRS	+ French door - Detach & reset						
	2	2.00 EA		0.00+	126.05 =	0.23	50.46	302.79

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CONTINUED - Master Bedroom

CAT	SEL	ACT DESCRIPTION	TAX	O&P	TOTAL
	CALC	QTY RESET REMOVE REPLACE			
168. PNT	FRS	+ Stain & finish French door slab only - (per side)			
	4	4.00 EA 0.00+ 235.96 =	4.40	189.64	1,137.88
169. FNH	DORH	R Detach & Reset Door knob - interior			
	2	2.00 EA 34.34 0.00+ 0.00 =	0.00	13.74	82.42
170. PNT	DORTS	+ Stain & finish door/window trim & jamb (per side)			
	4	4.00 EA 0.00+ 67.23 =	3.20	54.42	326.54
171. PNT	DORTS>	+ Stain & finish door/window trim & jamb - Large (per side)			
	1	1.00 EA 0.00+ 78.58 =	0.89	15.90	95.37
172. ELE	SMOKE+	& R&R Smoke detector - High grade			
	1	1.00 EA 16.83+ 121.12 =	7.05	29.00	174.00
173. LIT	RC++	& R&R Recessed light fixture - Premium grade			
	10	10.00 EA 16.90+ 234.42 =	102.29	523.10	3,138.59
174. LIT	SCON+	& R&R Light fixture - wall sconce - High grade			
	2	2.00 EA 12.64+ 173.67 =	23.40	79.20	475.22
175. SPE	TSIW+	& R&R In-wall / In-ceiling speaker - High grade			
	2	2.00 EA 7.59+ 468.37 =	74.49	205.28	1,231.69
176. FNH	TVRS	+ TV Brackets - Wall or ceiling mounted - Detach & reset			
	1	1.00 EA 0.00+ 68.25 =	0.00	13.66	81.91
Totals: Master Bedroom			257.48	1,696.00	10,176.00



M. Closet Hers

Height: 8'

248.91 SF Walls	86.04 SF Ceiling
334.94 SF Walls & Ceiling	86.04 SF Floor
9.56 SY Flooring	31.11 LF Floor Perimeter
37.11 LF Ceil. Perimeter	

Door

6' X 8'

Opens into MASTER_BEDRO


CAT	SEL	ACT DESCRIPTION	TAX	O&P	TOTAL
	CALC	QTY RESET REMOVE REPLACE			
-----Ceiling-----					
177. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling			
	C	86.04 SF 0.00+ 2.09 =	3.02	36.56	219.40
-----Walls-----					

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - M. Closet Hers

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
178. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	248.91 SF		0.00+	2.09 =	8.74	105.78	634.74
179. PNT	BS>	+ Stain & finish baseboard - oversized						
	PF	31.11 LF		0.00+	2.92 =	1.06	18.38	110.28
180. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	31.11 LF		0.00+	2.20 =	0.82	13.84	83.10
-----Floor-----								
181. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	86.04 SF		0.45+	0.00 =	0.59	7.86	47.17
-----Doors/Windows/Fixtures-----								
182. DOR	FRRS	+ French door - Detach & reset						
	2	2.00 EA		0.00+	126.05 =	0.23	50.46	302.79
183. DOR	FR2RS	+ French double door set - Detach & reset						
	1	1.00 EA		0.00+	151.02 =	0.11	30.22	181.35
184. PNT	FR2	+ Paint double French door slabs only - 2 coats (per side)						
	2	2.00 EA		0.00+	237.60 =	3.98	95.84	575.02
185. FNH	DORH	R Detach & Reset Door knob - interior						
	5	5.00 EA	34.34	0.00+	0.00 =	0.00	34.34	206.04
186. PNT	LAB	+ Painter - per hour						
	4	4.00 HR		0.00+	116.31 =	0.00	93.04	558.28
(2) crew for 2 hours								
187. FNC	CLOSM+	& R&R Closet Organizer - Melamine - High grade						
	PF-4'4	26.78 LF		11.38+	155.15 =	164.37	924.82	5,548.87
188. ELE	COSM+	& R&R Combination CO/Smoke detector - High grade						
	1	1.00 EA		16.83+	145.18 =	9.38	34.28	205.67
189. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	4	4.00 EA		16.90+	234.42 =	40.91	209.24	1,255.43
190. PNT	STRD1	+ Paint folding stairway/attic access exterior panel- 1 coat						
	1	1.00 EA		0.00+	40.70 =	0.71	8.28	49.69
191. ELE	OCSC+	& R&R Occupancy sensor - ceiling/wall mounted - High grade						
	1	1.00 EA		12.64+	205.20 =	14.72	46.50	279.06
Totals: M. Closet Hers						248.64	1,709.44	10,256.89

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539


M. Closet His
Height: 8'

234.57 SF Walls	74.41 SF Ceiling
308.98 SF Walls & Ceiling	74.41 SF Floor
8.27 SY Flooring	29.03 LF Floor Perimeter
35.78 LF Ceil. Perimeter	


Door	1' 9" X 6' 8"	Opens into SERVER_CLOS2
Door	5' X 8'	Opens into MASTER_BEDRO

CAT	SEL	ACT DESCRIPTION		RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
		CALC	QTY						
-----Ceiling-----									
192. PNT	SP2			+ Seal/prime (1 coat) then paint (2 coats) the ceiling					
		C	74.41 SF		0.00+	2.09 =	2.61	31.62	189.75
-----Walls-----									
193. PNT	SP2			+ Seal/prime (1 coat) then paint (2 coats) the walls					
		W	234.57 SF		0.00+	2.09 =	8.23	99.70	598.18
194. PNT	BS>			+ Stain & finish baseboard - oversized					
		PF	29.03 LF		0.00+	2.92 =	0.99	17.16	102.92
195. PNT	MASKLF			+ Mask and prep for paint - plastic, paper, tape (per LF)					
		PF	29.03 LF		0.00+	2.20 =	0.76	12.94	77.57
-----Floor-----									
196. DMO	MASKSFP			- Floor protection - heavy paper and tape					
		F	74.41 SF		0.45+	0.00 =	0.51	6.80	40.79
-----Doors/Windows/Fixtures-----									
197. DOR	FRRS			+ French door - Detach & reset					
		2	2.00 EA		0.00+	126.05 =	0.23	50.46	302.79
198. DOR	FR2RS			+ French double door set - Detach & reset					
		1	1.00 EA		0.00+	151.02 =	0.11	30.22	181.35
199. PNT	FR2			+ Paint double French door slabs only - 2 coats (per side)					
		2	2.00 EA		0.00+	237.60 =	3.98	95.84	575.02
200. FNH	DORH			R Detach & Reset Door knob - interior					
		5	5.00 EA	34.34	0.00+	0.00 =	0.00	34.34	206.04
201. PNT	LAB			+ Painter - per hour					
		4	4.00 HR		0.00+	116.31 =	0.00	93.04	558.28
(2) crew for 2 hours									
202. FNC	CLOSM+			& R&R Closet Organizer - Melamine - High grade					
		PF-4'4	24.70 LF		11.38+	155.15 =	151.60	852.98	5,117.88
203. ELE	COSM+			& R&R Combination CO/Smoke detector - High grade					
		1	1.00 EA		16.83+	145.18 =	9.38	34.28	205.67
204. LIT	RC++			& R&R Recessed light fixture - Premium grade					
		4	4.00 EA		16.90+	234.42 =	40.91	209.24	1,255.43
205. ELE	OCSC+			& R&R Occupancy sensor - ceiling/wall mounted - High grade					
		1	1.00 EA		12.64+	205.20 =	14.72	46.50	279.06

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - M. Closet His

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
Totals: M. Closet His						234.03	1,615.12	9,690.73


Server Closet
Height: 8'

52.33 SF Walls	3.75 SF Ceiling
56.08 SF Walls & Ceiling	3.75 SF Floor
0.42 SY Flooring	6.25 LF Floor Perimeter
8.00 LF Ceil. Perimeter	


1' 9" X 6' 8"
Opens into M_CLOSET_HI

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Ceiling-----								
206. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	3.75 SF		0.00+	2.09 =	0.13	1.58	9.55
-----Walls-----								
207. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	52.33 SF		0.00+	2.09 =	1.84	22.24	133.45
208. PNT	BS>	+ Stain & finish baseboard - oversized						
	PF	6.25 LF		0.00+	2.92 =	0.21	3.70	22.16
209. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	6.25 LF		0.00+	2.20 =	0.16	2.80	16.71
-----Floor-----								
210. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	3.75 SF		0.45+	0.00 =	0.03	0.34	2.06
-----Doors/Windows/Fixtures-----								
211. DOR	AV	R Detach & Reset Interior door unit						
	1	1.00 EA	114.56	0.00+	0.00 =	0.10	22.94	137.60
212. PNT	DOR	+ Paint door slab only - 2 coats (per side)						
	2	2.00 EA		0.00+	60.56 =	1.97	24.62	147.71
213. FNH	DORH	R Detach & Reset Door knob - interior						
	1	1.00 EA	34.34	0.00+	0.00 =	0.00	6.86	41.20
214. FNC	SH12	& R&R Shelving - 12" - in place						
	5*2	10.00 LF		0.57+	14.33 =	5.42	30.88	185.30

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Server Closet

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
215. PNT	SHW	+ Seal & paint wood shelving, 12"- 24" width 2*5 10.00 LF		0.00+	7.49 =	0.63	15.10	90.63
Totals: Server Closet						10.49	131.06	786.37



Master Bath

Height: 8'

252.33 SF Walls	134.79 SF Ceiling
387.13 SF Walls & Ceiling	97.87 SF Floor
10.87 SY Flooring	23.46 LF Floor Perimeter
35.83 LF Ceil. Perimeter	

Door

6' 2" X 8'

Opens into MASTER_BEDRO

Window

5' X 5'


Opens into Exterior

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Ceiling-----								
216. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	134.79 SF		0.00+	2.09 =	4.73	57.28	343.72
-----Walls-----								
217. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	252.33 SF		0.00+	2.09 =	8.86	107.26	643.49
218. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	23.46 LF		0.00+	2.20 =	0.62	10.44	62.67
-----Floor-----								
219. TIL	SEALG	+ Seal grout on tile wall						
	F+PF	121.33 SF		0.00+	2.63 =	2.25	64.28	385.63
-----Doors/Windows/Fixtures-----								
220. DOR	FRRS	+ French door - Detach & reset						
	2	2.00 EA		0.00+	126.05 =	0.23	50.46	302.79
221. PNT	FRS	+ Stain & finish French door slab only - (per side)						
	4	4.00 EA		0.00+	235.96 =	4.40	189.64	1,137.88
222. FNH	DORH	R Detach & Reset Door knob - interior						
	2	2.00 EA	34.34	0.00+	0.00 =	0.00	13.74	82.42

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Master Bath

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
223. PNT	DORTS	+ Stain & finish door/window trim & jamb (per side)						
	4	4.00 EA		0.00+	67.23 =	3.20	54.42	326.54
224. ELE	BFAN	& R&R Bathroom ventilation fan, light, and heater						
	1	1.00 EA		26.73+	330.49 =	22.12	75.86	455.20
225. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	6	6.00 EA		16.90+	234.42 =	61.37	313.86	1,883.15
226. LIT	BAR2	& R&R Light bar - 2 lights						
	3	3.00 EA		30.34+	97.74 =	6.99	78.24	469.47
227. SPE	TSIW++	& R&R In-wall / In-ceiling speaker - Premium grade						
	2	2.00 EA		7.59+	785.37 =	136.31	344.44	2,066.67
228. FNH	TVRS	+ TV Brackets - Wall or ceiling mounted - Detach & reset						
	1	1.00 EA		0.00+	68.25 =	0.00	13.66	81.91
Totals: Master Bath						251.08	1,373.58	8,241.54

Laundry Room
Height: 7'


252.21 SF Walls	86.02 SF Ceiling
338.23 SF Walls & Ceiling	55.35 SF Floor
6.15 SY Flooring	16.55 LF Floor Perimeter
41.89 LF Ceil. Perimeter	

Door **3' X 6' 8"** **Opens into Exterior**
Door **3' X 7'** **Opens into HALLWAY**

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
-----Ceiling-----								
229. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	86.02 SF		0.00+	2.09 =	3.02	36.56	219.36
-----Walls-----								
230. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	252.21 SF		0.00+	2.09 =	8.85	107.20	643.17
231. FNC	B6H	& R&R Baseboard - 6" hardwood						
	PF	16.55 LF		0.75+	10.64 =	11.73	40.04	240.27

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Laundry Room


CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
232. PNT	BS>	+ Stain & finish baseboard - oversized						
	PF	16.55 LF		0.00+	2.92 =	0.56	9.78	58.67
233. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	16.55 LF		0.00+	2.20 =	0.44	7.36	44.21
-----Floor-----								
234. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	55.35 SF		0.45+	0.00 =	0.38	5.06	30.35
235. FCT	MAT	& R&R Tile mat - uncoupling membrane						
	F	55.35 SF		1.39+	6.90 =	14.14	94.58	567.58
236. FCT	AV+	& R&R Tile floor covering - High grade						
	F	55.35 SF		3.80+	20.19 =	44.04	274.36	1,646.25
237. FCT	MORTAR	& R&R Mortar bed for tile floors						
	F	55.35 SF		2.05+	7.22 =	12.68	105.16	630.94
238. FCT	SEALG	+ Grout sealer						
	F	55.35 SF		0.00+	2.42 =	1.03	27.00	161.98
-----Doors/Windows/Fixtures-----								
239. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	4	4.00 EA		16.90+	234.42 =	40.91	209.24	1,255.43
240. DOR	FRX	R Detach & Reset French door - Exterior - pre-hung unit						
	1	1.00 EA						SEE X3.BUILD
241. PNT	FRX	+ Prime & paint French door slab only - exterior (per side)						
	2	2.00 EA		0.00+	168.02 =	3.62	67.92	407.58
242. FNH	DBX+	R Detach & Reset Door lockset & deadbolt - exterior - High grade						
	1	1.00 EA	48.07	0.00+	0.00 =	0.00	9.62	57.69
243. DOR	FRRS	+ French door - Detach & reset						
	1	1.00 EA		0.00+	126.05 =	0.11	25.24	151.40
244. FNH	DORH	R Detach & Reset Door knob - interior						
	1	1.00 EA	34.34	0.00+	0.00 =	0.00	6.86	41.20
245. PNT	FRS	+ Stain & finish French door slab only - (per side)						
	2	2.00 EA		0.00+	235.96 =	2.20	94.82	568.94
246. PNT	DORTS	+ Stain & finish door/window trim & jamb (per side)						
	2	2.00 EA		0.00+	67.23 =	1.60	27.22	163.28
247. PLM	CAP	+ Gas/water line cap/plug - per cap						
	1	1.00 EA		0.00+	18.17 =	0.12	3.66	21.95
-----Cabinetry-----								
248. CAB	LOW+	& R&R Cabinetry - lower (base) units - High grade						
	8'6	8.50 LF		11.39+	342.02 =	236.87	648.18	3,889.04
249. CAB	CTQ+	& R&R Countertop - quartz/engineered stone - High grade						
	8'6*2'2+8'6	26.92 SF		8.18+	110.40 =	157.06	669.86	4,019.10

Includes backsplash

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Laundry Room

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
250. CAB	PNL+	& R&R Custom cabinet panels - side, end, or back - High grade						
	3*3	9.00 SF		2.94+	29.94 =	16.07	62.42	374.41
251. CAB	CUW30+	& R&R Custom cabinets - wall units - 30" tall - High grade						
	13'7	13.58 LF		11.39+	327.14 =	351.24	989.70	5,938.18
252. PLM	SNK+	R Detach & Reset Sink - single - High grade						
	1	1.00 EA	187.63	0.00+	0.00 =	0.08	37.54	225.25
253. PLM	FAU	R Detach & Reset Sink faucet - Kitchen						
	1	1.00 EA	149.84	0.00+	0.00 =	0.00	29.96	179.80
Totals: Laundry Room						906.75	3,589.34	21,536.03



Bathroom 1

Height: 8' 5"

337.92 SF Walls
 453.42 SF Walls & Ceiling
 8.55 SY Flooring
 43.00 LF Ceil. Perimeter

115.50 SF Ceiling
 76.93 SF Floor
 16.08 LF Floor Perimeter

Door

3' X 8'


Opens into BEDROOM_2

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Ceiling-----								
254. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	115.50 SF		0.00+	2.09 =	4.05	49.10	294.55
-----Walls-----								
255. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	337.92 SF		0.00+	2.09 =	11.86	143.64	861.75
256. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	16.08 LF		0.00+	2.20 =	0.42	7.16	42.96
-----Floor-----								
257. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	76.93 SF		0.45+	0.00 =	0.53	7.02	42.17
-----Doors/Windows/Fixtures-----								
258. DOR	ALDP8	R Detach & Reset Interior door, 8' - solid alder - paneled - pre-hung						
	2	2.00 EA	126.05	0.00+	0.00 =	0.23	50.46	302.79


550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Bathroom 1

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
259. FNH	DORH	R Detach & Reset Door knob - interior						
	2	2.00 EA	34.34	0.00+	0.00 =	0.00	13.74	82.42
260. PNT	DORS	+ Stain & finish door slab only (per side)						
	4	4.00 EA		0.00+	95.98 =	4.54	77.68	466.14
261. PNT	DORTS	+ Stain & finish door/window trim & jamb (per side)						
	4	4.00 EA		0.00+	67.23 =	3.20	54.42	326.54
262. LIT	BAR2+	& R&R Light bar - 2 lights - High grade						
	1	1.00 EA		30.34+	164.10 =	8.80	40.64	243.88
263. ELE	BFAN	& R&R Bathroom ventilation fan, light, and heater						
	1	1.00 EA		26.73+	330.49 =	22.12	75.86	455.20
-----Cabinetry-----								
264. PNT	MASKSF	+ Mask the surface area per square foot - plastic and tape - 4 mil						
	60	60.00 SF		0.00+	0.39 =	0.41	4.76	28.57
Totals: Bathroom 1						56.16	524.48	3,146.97


Bedroom 1
Height: Sloped

513.72 SF Walls	224.57 SF Ceiling
738.29 SF Walls & Ceiling	224.00 SF Floor
24.89 SY Flooring	45.00 LF Floor Perimeter
60.07 LF Ceil. Perimeter	

Window
3' 4" X 4' 7"
Opens into Exterior
Door
3' X 7'
Opens into HALLWAY
Subroom: Closet 1 (1)
Height: 8'


206.67 SF Walls	30.67 SF Ceiling
237.33 SF Walls & Ceiling	30.67 SF Floor
3.41 SY Flooring	23.83 LF Floor Perimeter
35.83 LF Ceil. Perimeter	

Door
6' X 6' 8"
Opens into BEDROOM_1
Door
6' X 6' 8"
Opens into BEDROOM_1




Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
CALC	QTY							
-----Ceiling-----								
265. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	255.24 SF		0.00+	2.09 =	8.96	108.50	650.91
-----Walls-----								
266. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	720.39 SF		0.00+	2.09 =	25.29	306.18	1,837.09
267. PNT	BS>	+ Stain & finish baseboard - oversized						
	PF	68.83 LF		0.00+	2.92 =	2.35	40.68	244.01
268. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	68.83 LF		0.00+	2.20 =	1.81	30.64	183.88
-----Floor-----								
269. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	254.67 SF		0.45+	0.00 =	1.74	23.26	139.60
-----Doors/Windows/Fixtures-----								
270. ELE	SMOKE+	& R&R Smoke detector - High grade						
	1	1.00 EA		16.83+	121.12 =	7.05	29.00	174.00
271. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	7	7.00 EA		16.90+	234.42 =	71.60	366.16	2,197.00
272. LIT	MISC	& R&R Large recessed light - Omni ray						
	1	1.00 EA		16.90+	300.00 =	11.99	65.78	394.67
273. DOR	FRRS	+ French door - Detach & reset						
	1	1.00 EA		0.00+	126.05 =	0.11	25.24	151.40
274. PNT	FR	+ Paint French door slab only - 2 coats (per side)						
	2	2.00 EA		0.00+	118.80 =	1.99	47.92	287.51
-----Closet-----								
275. FNC	CLOSM+	& R&R Closet Organizer - Melamine - High grade						
	15'11	15.92 LF		11.38+	155.15 =	97.71	549.78	3,298.65
276. PNT	LAB	+ Painter - per hour						
	2	2.00 HR		0.00+	116.31 =	0.00	46.52	279.14
To paint closet organizer								
277. DOR	BPRS	+ Bypass (sliding) door set - slabs only - Detach & reset						
	2	2.00 EA		0.00+	44.08 =	0.00	17.64	105.80
278. PNT	FR	+ Paint French door slab only - 2 coats (per side)						
	8	8.00 EA		0.00+	118.80 =	7.96	191.68	1,150.04
Totals: Bedroom 1						238.56	1,848.98	11,093.70


550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539


Bedroom 2
Height: Sloped

545.08 SF Walls
 894.65 SF Walls & Ceiling
 38.25 SY Flooring
 75.03 LF Ceil. Perimeter

349.57 SF Ceiling
 344.25 SF Floor
 55.50 LF Floor Perimeter

Door 10' X 6' 8" **Opens into Exterior**
Door 3' X 7' **Opens into HALLWAY**
Door 3' X 8' **Opens into BATHROOM_1**
Window 3' X 5' **Opens into Exterior**
Window 3' X 5' **Opens into Exterior**


Subroom: Closet 2 (1)
Height: 8'

159.00 SF Walls
 190.43 SF Walls & Ceiling
 3.49 SY Flooring
 22.50 LF Ceil. Perimeter

31.43 SF Ceiling
 31.43 SF Floor
 19.50 LF Floor Perimeter


Door 3' X 7' **Opens into BEDROOM_2**

CAT	SEL	ACT DESCRIPTION		RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY							
-----Ceiling-----									
279. PNT	SP2		+ Seal/prime (1 coat) then paint (2 coats) the ceiling						
	C	381.00 SF			0.00+	2.09 =	13.37	161.94	971.60
-----Walls-----									
280. PNT	SP2		+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	704.08 SF			0.00+	2.09 =	24.71	299.24	1,795.48
281. PNT	BS>		+ Stain & finish baseboard - oversized						
	PF	75.00 LF			0.00+	2.92 =	2.56	44.32	265.88
282. PNT	MASKLF		+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	75.00 LF			0.00+	2.20 =	1.97	33.40	200.37
-----Floor-----									
283. DMO	MASKSFP		- Floor protection - heavy paper and tape						
	F	375.68 SF			0.45+	0.00 =	2.56	34.34	205.96
-----Doors/Windows/Fixtures-----									
284. DOR	FRRS		+ French door - Detach & reset						
		2	2.00 EA		0.00+	126.05 =	0.23	50.46	302.79
285. PNT	FR		+ Paint French door slab only - 2 coats (per side)						
		4	4.00 EA		0.00+	118.80 =	3.98	95.84	575.02

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Bedroom 2

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
286. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	11	11.00 EA		16.90+	234.42 =	112.52	575.40	3,452.44
287. ELE	SMOKE+	& R&R Smoke detector - High grade						
	1	1.00 EA		16.83+	121.12 =	7.05	29.00	174.00
288. PNT	DORTS	+ Stain & finish door/window trim & jamb (per side)						
	3	3.00 EA		0.00+	67.23 =	2.40	40.82	244.91
289. PNT	DORTS>	+ Stain & finish door/window trim & jamb - Large (per side)						
	1	1.00 EA		0.00+	78.58 =	0.89	15.90	95.37
-----Closet-----								
290. FNC	CLOSM+	& R&R Closet Organizer - Melamine - High grade						
	LL1	6.08 LF		11.38+	155.15 =	37.32	209.96	1,259.78
Totals: Bedroom 2						209.56	1,590.62	9,543.60


Garage
Height: 9' 3"

604.35 SF Walls
 1013.83 SF Walls & Ceiling
 45.50 SY Flooring
 81.45 LF Ceil. Perimeter

409.48 SF Ceiling
 409.48 SF Floor
 60.03 LF Floor Perimeter

Door **18' 9" X 7'** **Opens into Exterior**
Door **2' 8" X 6' 8"** **Opens into Exterior**

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Ceiling-----								
291. DRY	AC	+ Acoustic ceiling (popcorn) texture						
	C	409.48 SF		0.00+	1.96 =	2.79	161.08	966.45
292. PNT	AC	+ Seal & paint acoustic ceiling (popcorn) texture						
	C	409.48 SF		0.00+	2.01 =	17.17	168.06	1,008.28
-----Walls-----								
293. PNT	SP2	+ Seal/prime (1 coat) then paint (2 coats) the walls						
	W	604.35 SF		0.00+	2.09 =	21.21	256.86	1,541.16

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Garage

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
294. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	PF	60.03 LF		0.00+	2.20 =	1.58	26.74	160.39
-----Floor-----								
295. DMO	MASKSFP	- Floor protection - heavy paper and tape						
	F	409.48 SF		0.45+	0.00 =	2.79	37.42	224.48
296. CNC	CS	+ Concrete sealer - brush or spray applied						
	F	409.48 SF		0.00+	1.43 =	30.74	123.26	739.56
-----Doors/Windows/Fixtures-----								
297. DOR	BIDITM	+ Doors - Overhead door per X3 Build - Estimate #1038						
	1	1.00 EA [*E]		0.00+	9,000.00 =	0.00	1,800.00	10,800.00
298. DOR	OHH18>	& R&R Overhead door, 18' x 8' - hardwood overlay						
	1	1.00 EA					SEE X3.BUILD	
299. DOR	OHWD+	+ Add for decorative window - overhead door - per window						
	5	5.00 EA					SEE X3.BUILD	
300. DOR	OHTRAK	& R&R Overhead door track						
	10	10.00 LF					SEE X3.BUILD	
301. DOR	OHO++	& R&R Overhead (garage) door opener - Premium grade						
	1	1.00 EA					SEE X3.BUILD	
302. DOR	FRX	& R&R French door - Exterior - pre-hung unit						
	1	1.00 EA					SEE X3.BUILD	
303. LIT	FL+	& R&R Fluorescent light fixture - High grade						
	4	4.00 EA		21.14+	171.72 =	38.17	161.94	971.55
304. FNH	DBX	+ Door lockset & deadbolt - exterior						
	1	1.00 EA		0.00+	105.29 =	6.36	22.34	133.99
305. PNT	FR	+ Paint French door slab only - 2 coats (per side)						
	2	2.00 EA		0.00+	118.80 =	1.99	47.92	287.51
306. PNT	MASKF	+ Mask French door lites (per side of slab)						
	2	2.00 EA		0.00+	85.92 =	0.26	34.42	206.52
307. ELE	ICR+	& R&R Intercom - Remote station - High grade						
	1	1.00 EA		12.64+	196.48 =	7.84	43.38	260.34
Totals: Garage						130.90	2,883.42	17,300.23
Total: Main Level						8,483.69	48,052.28	307,312.40

Attic



Height: 3'

790.83 SF Walls	862.00 SF Ceiling
1652.82 SF Walls & Ceiling	862.00 SF Floor
95.78 SY Flooring	263.61 LF Floor Perimeter
263.61 LF Ceil. Perimeter	

Exterior - Main Structure

CAT	SEL	ACT DESCRIPTION						
	CALC	QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Lights/Fixtures-----								
310. ELE	ICM++	& R&R Intercom - Master station - Premium grade						
	1	1.00 EA		22.76+	1,167.67 =	79.94	254.08	1,524.45
Streetfront								
311. SPE	TSIW+	& R&R In-wall / In-ceiling speaker - High grade						
	2	2.00 EA		7.59+	468.37 =	74.49	205.28	1,231.69
Poolside								
312. ELS	SURVC	& R&R Surveillance camera - color						
	7	7.00 EA		75.86+	683.25 =	273.00	1,117.36	6,704.13
Perimeter of home plus 2 streetside								
313. LIT	RC++	& R&R Recessed light fixture - Premium grade						
	24	24.00 EA		16.90+	234.42 =	245.49	1,255.44	7,532.61
In wood Soffit								
314. LIT	X++	& R&R Exterior light fixture - Premium grade						
	11	11.00 EA		19.03+	208.50 =	117.98	524.16	3,144.97
Exterior sconces								
315. LIT	ARCH	& R&R Architectural effect lights - exterior						
	16	16.00 EA		21.14+	272.28 =	248.01	988.54	5,931.27
Floor light fixtures								
316. LIT	SPOT2M	& R&R Spot light fixture - double - w/motion sensor						
	1	1.00 EA		21.14+	195.31 =	4.65	44.22	265.32

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Exterior - Main Structure

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
317. LIT	BLCFSP	+ Light bulb - Compact Flrscent spot/flood (R30) - mat. only						
	2	2.00 EA		0.00+	10.99 =	2.14	4.82	28.94
318. LIT	BLCFA	+ Light bulb - Compact Fluorescent stand. type - mat. only						
	35+11*2	57.00 EA		0.00+	8.40 =	46.68	105.10	630.58
319. LIT	BLL	+ Light bulb - LED A19 - up to 500 lm - material only						
	16	16.00 EA		0.00+	5.23 =	8.16	18.38	110.22
-----Awning-----								
320. AWN	WINC+	& R&R Awning - Window/door - Canvas (retractable)						
	17+14	31.00 LF		1.37+	338.62 =	453.59	2,198.66	13,191.94
321. AWN	WINCM	+ Awning - Canvas (retractable) - Add to motorize						
	2	2.00 EA		0.00+	753.29 =	106.47	322.62	1,935.67
Total: Exterior - Main Structure						1,660.60	7,038.66	42,231.79

Roof

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
-----Roof Repairs-----								
322. RFG	BI	& R&R Modified bitumen roof						
	43	43.00 SQ						SEE X3.BUILD
323. RFG	DRIP	& R&R Drip edge						
	300	300.00 LF						SEE X3.BUILD
324. RFG	BIDITM	+ Roofing repairs per X3 Build - Estimate #1038						
	1	1.00 EA [*E]		0.00+	32,000.00 =	0.00	6,400.00	38,400.00
The following line item applies to roofing repairs per X3 Build								
Roof remove & replace torch down roof								
325. RFG	ERCP	+ Elastomeric roof primer						
	4300	4300.00 SF						SEE X3.BUILD
Pre-loss condition includes elastomeric - not included in contractor's estimate								
326. RFG	ERCF	+ Elastomeric roof coating - Flat roof						
	4300	4300.00 SF						SEE X3.BUILD
Pre-loss condition includes elastomeric - not included in contractor's estimate								
327. SFG	WRAPCF	& R&R Wrap custom fascia with aluminum (PER LF)						
	300	300.00 LF						SEE X3.BUILD




Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CONTINUED - Roof

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
328. SFG	GUTAB>	& R&R Gutter - box - aluminum - 7" to 8"						
	20	20.00 LF						SEE X3.BUILD
329. SFG	GUTRS	+ Downspout - Detach & reset						
	20	20.00 LF						SEE X3.BUILD
-----Soffit-----								
330. FCW	AV++	& R&R Oak Soffit - clear grade - no finish						
	285*2+150	720.00 SF						SEE X3.BUILD
See X3 Build estimate no 1038- Item # 14								
331. FCW	FIN	+ Sand & finish wood floor (natural finish)						
	720	720.00 SF						SEE X3.BUILD
See X3 Build estimate no 1038- Item # 14								
332. FCW	FINDS	+ Add for dustless floor sanding						
	720	720.00 SF						SEE X3.BUILD
See X3 Build estimate no 1038- Item # 14								
333. FCW	FINADD	+ Additional coats of finish (per coat)						
	720	720.00 SF						SEE X3.BUILD
See X3 Build estimate no 1038- Item # 14								
334. FNC	QRH	& R&R Quarter round - 3/4" - hardwood						
	300	300.00 LF						SEE X3.BUILD
See X3 Build estimate no 1038- Item # 14								
335. PNT	MASKLF	+ Mask and prep for paint - plastic, paper, tape (per LF)						
	300	300.00 LF						SEE X3.BUILD
See X3 Build estimate no 1038- Item # 14								
336. FNC	BIDITM	+ Finish Carpentry / Trim (Bid Item) X3 Build Estimate No. 1038 - 14 Wood Panel Eaves/Soffit						
	1	1.00 EA [*E]		0.00+	42,000.00 =	0.00	8,400.00	50,400.00
No 14: Finish carpentry: replace damaged wood under the eaves								
Totals: Roof						0.00	14,800.00	88,800.00

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

Ext_Surfaces


3195.78 SF Walls
 3195.78 SF Walls & Ceiling

360.28 LF Floor Perimeter

Window	3' X 5'	Opens into Exterior
Window	3' X 5'	Opens into Exterior
Window	3' 4" X 4' 7"	Opens into Exterior
Door	5' 4" X 8'	Opens into Exterior
Window	9' X 5'	Opens into Exterior
Window	6' X 3' 6"	Opens into Exterior
Window	5' X 3' 6"	Opens into Exterior
Door	5' 8" X 9' 7"	Opens into Exterior
Door	5' 8" X 9' 7"	Opens into Exterior
Door	4' 1" X 9' 7"	Opens into Exterior
Window	5' X 5'	Opens into Exterior
Door	11' 4" X 9' 7"	Opens into Exterior
Door	9' 7" X 9' 7"	Opens into Exterior
Door	7' X 9' 7"	Opens into Exterior
Door	7' X 9' 7"	Opens into Exterior
Door	11' X 8'	Opens into Exterior
Door	3' X 6' 8"	Opens into Exterior
Door	10' X 6' 8"	Opens into Exterior
Window	3' X 6'	Opens into Exterior
Window	3' X 6'	Opens into Exterior
Door	2' 8" X 6' 8"	Opens into Exterior
Door	18' 9" X 7'	Opens into Exterior

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
-----Stucco Walls-----								
337. PNT	MASKTD	+ Labor to tape drop cloths						
	600+300	900.00 SF					SEE X3.BUILD	
338. STU	RP	+ Stucco repair around doors, windows, etc - 1st floor						
	400	400.00 LF					SEE X3.BUILD	

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Ext_Surfaces

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
Damaged stucco due to replacing Exterior windows and sliders								
339. CLN	SB+	+ Sandblasting - Heavy						
	W	3195.78 SF						SEE X3.BUILD
340. CLN	VAC	+ Vacuuming - (PER SF)						
	300*5	1500.00 SF						SEE X3.BUILD
341. STU	NGT	+ Stucco - natural gray - troweled						
	W	3195.78 SF						SEE X3.BUILD
342. PNT	STU	+ Seal & paint stucco						
	W	3195.78 SF						SEE X3.BUILD
343. STU	BIDITM	+ Exterior stucco removal & haul off per X3 Build - Estimate #1038						
	1	1.00 EA [*E]		0.00+	22,100.00 =	0.00	4,420.00	26,520.00
The line item applies to the exterior stucco removal per X3 Build								
Demolition - remove & haul off the existing stucco exterior								
344. STU	BIDITM	+ Stucco & Exterior Plaster - New smooth stucco throughout the exterior per X3 Build - Estimate #1038						
	1	1.00 EA [*E]		0.00+	59,000.00 =	0.00	11,800.00	70,800.00
The following line item applies to the stucco repairs per X3 Build								
New smooth stucco throughout the exterior								
-----Garage Ceiling/Planters-----								
Includes Garage ceiling planter and lower retaining wall.								
345. PNT	MASKTD	+ Labor to tape drop cloths						
	150	150.00 SF		0.00+	0.27 =	0.15	8.14	48.79
346. CLN	SB+	+ Sandblasting - Heavy						
	(13'10"21'3"2)-117	470.92 SF		0.00+	2.06 =	9.64	195.94	1,175.68
347. CLN	VAC	+ Vacuuming - (PER SF)						
	150	150.00 SF		0.00+	0.15 =	0.00	4.50	27.00
348. STU	NGT	+ Stucco - natural gray - troweled						
	470.92	470.92 SF		0.00+	10.55 =	66.58	1,006.96	6,041.75
349. PNT	STU	+ Seal & paint stucco						
	470.92	470.92 SF		0.00+	2.33 =	16.53	222.74	1,336.51
Totals: Ext_Surfaces						92.90	17,658.28	105,949.73
Total: Exterior - Main Structure						1,753.50	39,496.94	236,981.52
Total: Dwelling						14,766.42	120,233.18	951,374.61

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
CALC	QTY							
-----Front Artificial Turf/Putting Green-----								
350. EQC	SFTURF	& R&R Artificial grass / turf						
	(357-(44.75+4'6))-(18*7)	181.75 SF		3.80+	15.40 =	166.04	731.14	4,386.78
Applies to left elevation of the putting green area								
351. EQC	PGTURF	& R&R Putting green artifical grass						
	17*7	119.00 SF		3.80+	37.00 =	0.00	971.04	5,826.24
352. EQC	SFTURF	& R&R Artificial grass / turf						
	7'8*31'8	242.78 SF		3.80+	15.40 =	221.80	976.64	5,859.81
Applies to left elevation of the putting green area								
-----Exterior Deck Tile Flooring- Front Elevation-----								
353. FCT	BIDITM	+ Floor Covering - Tile repair per X3 Build - Estimate #1038						
	1	1.00 EA [EN]		0.00+	0.00 =	0.00	0.00	0.00
The line item applies to the exterior tile tile repairs per X3 Build								
Tile work								
1. Tiles around the pool, demo and replace								
2. Entire interior floor to match the exterior deck tiles								
354. FCT	AV+	& R&R Tile floor covering - High grade						
	1156	1156.00 SF		3.80+	20.19 =	919.71	5,730.42	34,382.57
355. FCT	MORTAR	& R&R Mortar bed for tile floors						
	1156	1156.00 SF		2.05+	7.22 =	264.87	2,196.20	13,177.19
356. FCT	MAT	+ Tile mat - uncoupling membrane						
	1156	1156.00 SF		0.00+	6.90 =	295.30	1,654.34	9,926.04
357. FCT	SEALG	+ Grout sealer						
	1156	1156.00 SF		0.00+	2.42 =	21.41	563.78	3,382.71
358. FCT	LAB	+ Ceramic Tile Flooring Installer - per hour						
	12	12.00 HR		0.00+	170.74 =	0.00	409.78	2,458.66
To cut tile for re-installation of glass stantions/supports, posts, floor lights, drains, fire pit and other protrusions.								
359. PLM	FLD	& R&R Floor drain - tub/shower - metal/plastic						
	6	6.00 EA		11.38+	49.06 =	4.88	73.52	441.04
360. MAS	PAVT	& R&R Paver travertine						
	33.75	33.75 SF		4.01+	21.64 =	18.92	176.92	1,061.53
Stones steps in grass								
-----Stairs/Right Elevation - Flooring-----								
361. FCT	TRAV++	& R&R Travertine tile - Premium grade						
	11*11+5*6+(4*4*3)+(21*4)	283.00 SF						SEE X3.BUILD
Includes steps & landings								
362. FCT	MORTAR	& R&R Mortar bed for tile floors						
	283	283.00 SF						SEE X3.BUILD

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CONTINUED - Other Structures

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
363. FCT	SEALG	+ Grout sealer						
	283	283.00 SF						SEE X3.BUILD
364. FCT	LAB	+ Ceramic Tile Flooring Installer - per hour						
	24	24.00 HR [*]						SEE X3.BUILD
To mill and shape travertine tiling								
-----Pool/Jacuzzi-----								
365. POL	COPF	& R&R Pool coping - flagstone - up to 12" depth						
	8+13'10+57'3+50'1	129.17 LF						SEE X3.BUILD
366. POL	BIDITM	+ Swimming Pools & Spas (Bid Item) X3 Estimate #1038 - Pool Replaster						
	1	1.00 EA [*EN]		0.00+	22,000.00 =	0.00	0.00	22,000.00
<u>Line 1: Pool replaster: demo existing plaster and apply new mini pebble finish</u>								
367. POL	BIDITM	+ Swimming Pools & Spas (Bid Item) X3 Estimate #1038 - Pool Equipment						
	1	1.00 EA [*EN]		0.00+	38,700.00 =	0.00	0.00	38,700.00
<u>Line 2: Pool equipment: replace all fire damaged pool equipment (pump, heater, sub-panel, vacuum lines, etc)</u>								
-----Glass Railing-----								
368. GLS	GGRAIL	& R&R Glass guardrail 36" - 42" height - metal handrail						
	100	100.00 LF						SEE X3.BUILD
369. GLS	BIDITM	+ Glass, Glazing, & Storefronts (Bid Item) X3 BUILD Estimate #1038 - Glass Railing						
	1	1.00 EA [*EN]		0.00+	32,800.00 =	0.00	0.00	32,800.00
<u>N0 12: Glass railings: replace glass railings on front patio</u>								
-----Fire Pit-----								
370. FPL	MISC	& R&R Outside fire pit						
	1	1.00 EA		0.00+	5,500.00 =	219.86	1,143.98	6,863.84
Gas supplied 5' X 1' X 2"H with line stone exterior face and glass wind-guards								
371. PLM	CAP	+ Gas/water line cap/plug - per cap						
	1	1.00 EA		0.00+	18.17 =	0.12	3.66	21.95
Cap gas line during repairs								
-----Built-In BBQ-----								
372. SPE	BQI++	+ Modular BBQ grill island - Premium grade						
	1	1.00 EA		0.00+	12,407.18 =	1,121.25	2,705.70	16,234.13
373. SPE	GRILL	+ Napoleon grill - Premium						
	1	1.00 EA		0.00+	1,500.00 =	0.00	300.00	1,800.00
-----Iron Railing at Stairs to Garage/Right Elevation -----								
-----Iron Railing with Wire Guides-----								
374. ORI	ORRS	+ Ornamental iron handrail - Detach & reset						
	54	54.00 LF		0.00+	38.72 =	1.53	418.48	2,510.89
375. ORI	LAB	+ Ornamental Iron Worker - per hour						
	2*8*2	32.00 HR		0.00+	134.34 =	0.00	859.78	5,158.66
(2) Crew for 1 day to detach all wire support/guide & 1 day wire to reset wire guides.								

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Other Structures

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
376. CLN	ORI	+ Clean ornamental iron handrail						
	54	54.00 LF		0.00+	4.24 =	0.21	45.84	275.01
377. PNT	ORI	+ Prime & paint ornamental iron handrail, 36" to 42" high						
	54	54.00 LF		0.00+	15.73 =	20.64	174.00	1,044.06
-----Hand Rail Wall Mounted-----								
378. MTL	HRSPW	R Detach & Reset Handrail - Steel pipe - Wall mounted						
	4'8+41'8	46.33 LF	19.30	0.00+	0.00 =	0.00	178.84	1,073.01
379. CLN	HR	+ Clean handrail - wall mounted						
	46.33	46.33 LF		0.00+	0.85 =	0.00	7.88	47.26
380. PNT	HR	+ Paint handrail - wall mounted						
	46.33	46.33 LF		0.00+	1.87 =	0.99	17.52	105.15
-----Iron Fencing on top of Garage-----								
381. ORI	ORRS	+ Ornamental iron handrail - Detach & reset						
	23*2	46.00 LF		0.00+	38.72 =	1.30	356.48	2,138.90
382. CLN	ORI	+ Clean ornamental iron handrail						
	46	46.00 LF		0.00+	4.24 =	0.18	39.04	234.26
383. PNT	ORI	+ Prime & paint ornamental iron handrail, 36" to 42" high						
	46	46.00 LF		0.00+	15.73 =	17.58	148.24	889.40
-----Stairwell Retaining Walls/Right Elevation -----								
-----Exterior wall alongside driveway-----								
384. CLN	SB+	+ Sandblasting - Heavy						
	(5*44)+(2*44)	308.00 SF		0.00+	2.06 =	6.31	128.16	768.95
385. STU	NGT	+ Stucco - natural gray - troweled						
	308	308.00 SF		0.00+	10.55 =	43.54	658.58	3,951.52
386. PNT	STU	+ Seal & paint stucco						
	308	308.00 SF		0.00+	2.33 =	10.81	145.68	874.13
-----Interior Retaining Walls of the Right Elevation Stairwell-----								
387. CLN	SB+	+ Sandblasting - Heavy						
	7*6'8+7'9*4'6+16*5+11*5	216.54 SF		0.00+	2.06 =	4.43	90.10	540.60
388. STU	NGT	+ Stucco - natural gray - troweled						
	216.54	216.54 SF		0.00+	10.55 =	30.61	463.02	2,778.13
389. PNT	STU	+ Seal & paint stucco						
	216.54	216.54 SF		0.00+	2.33 =	7.60	102.42	614.56
-----Stairwell Risers-----								
390. CLN	SB+	+ Sandblasting - Heavy						
	23	23.00 SF		0.00+	2.06 =	0.47	9.58	57.43
391. STU	NGT	+ Stucco - natural gray - troweled						
	23	23.00 SF		0.00+	10.55 =	3.25	49.20	295.10

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Other Structures

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
392. PNT	STU	+ Seal & paint stucco						
	23	23.00 SF		0.00+	2.33 =	0.81	10.88	65.28
393. LIT	ARCH	& R&R Architectural effect lights - exterior						
	14	14.00 EA		21.14+	272.28 =	217.01	864.98	5,189.87
Step lights								
-----Pergola-----								
394. XST	BIDITM	+ Exterior Structures (Bid Item) X3 Estimate dated 04/25/25 - Powder Coat Pergola						
	1	1.00 EA [*EN]		0.00+	28,000.00 =	0.00	0.00	28,000.00
N0 9: Painting: Powder coat metal pergola								
-----Block wall & Wooden Fencing - Rear Elevation-----								
-----Wooden Fencing-----								
395. FEN	WDGT8	& R&R Wood gate 7'- 8' high - cedar or equal						
	56+15	71.00 LF		9.49+	114.69 =	327.37	1,828.84	10,972.99
396. PNT	FEN	+ Seal & paint - wood fence/gate						
	71*7	497.00 SF		0.00+	1.84 =	21.81	187.26	1,123.55
397. FEN	LAB	+ Fencing Installer - per hour						
	6	6.00 HR		0.00+	162.18 =	0.00	194.62	1,167.70
To drill and bolt wood slatted fencing into block wall								
-----Block Wall-----								
398. MAS	BL6+	& R&R Block - 6" x 8" x 16" - in place - reinforced						
	33*5.5+(10*5.5)/2	209.00 SF		4.58+	15.66 =	88.23	863.66	5,182.05
Footings are excluded from this estimate								
399. CNC	COR1	+ Concrete core drilling - 1" diameter x 1" deep						
	8*15	120.00 EA		0.00+	15.35 =	0.00	368.40	2,210.40
8" drilling x every 2 feet								
400. CNC	EPXMN	+ Epoxy injection - concrete repair - Minimum charge						
	1	1.00 EA		0.00+	1,148.00 =	2.15	230.04	1,380.19
401. CNC	RBJ47	+ Steel rebar - j-bar - #4, 7' 6"						
	15	15.00 EA		0.00+	21.62 =	5.18	65.90	395.38
-----Driveway-----								
402. CLN	PWASH	+ Clean with pressure/chemical spray						
	380	380.00 SF		0.00+	0.52 =	0.37	39.60	237.57
403. CNC	CS	+ Concrete sealer - brush or spray applied						
	380	380.00 SF		0.00+	1.43 =	28.53	114.38	686.31
-----Black Metal Gates & Fencing-----								
404. CLN	AV+	+ Clean the surface area - Heavy						
	286	286.00 SF		0.00+	0.71 =	0.28	40.68	244.02
405. PNT	ORIF	+ Prime & paint Metal fence - per SF						
	26*5.5*2	286.00 SF		0.00+	5.24 =	36.53	307.02	1,842.19
Metal Fence/Gate								

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

CONTINUED - Other Structures

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
406. FNH	DOROK	& R&R Wireless/Keyless entry pad for auto door operator system						
	1	1.00 EA						SEE X3.BUILD
Totals: Other Structures						4,131.88	26,646.22	281,377.01

Landscaping

CAT	SEL CALC	ACT DESCRIPTION QTY	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
407. LND	LABL	+ General Laborer - per hour						
	200	200.00 HR [N]		0.00+	65.00 =	0.00	0.00	13,000.00
408. DMO	TREE	- Tree - tear out and disposal - 12" to 24" diameter						
	10	10.00 EA [N]		1,215.14+	0.00 =	0.00	0.00	12,151.40
409. LND	TEV7	+ Tree - evergreen - 6' to 7' in height						
	20	20.00 EA [N]		0.00+	413.88 =	354.90	0.00	8,632.50
Rear Elevation trees alongside damaged CMU Block wall								
410. DMO	TREE>	- Tree - tear out and disposal - 24" to 36" diameter						
	15	15.00 EA [N]		2,351.40+	0.00 =	0.00	0.00	35,271.00
411. LND	TFS4	+ Tree - shade or flowering - 4" caliper						
	15	15.00 EA [N]		0.00+	676.45 =	548.44	0.00	10,695.19
Right Elevation hillside trees								
412. LND	PPG5P	+ Plants - perennials - grasses - groundcover - 5pt						
	200	200.00 EA [N]		0.00+	24.20 =	178.04	0.00	5,018.04
413. LND	PSE5	+ Plants - shrubs - evergreen - 5 gallon						
	30	30.00 EA [N]		0.00+	130.35 =	169.65	0.00	4,080.15
414. LND	PFV5	+ Plants - ferns - vines - 5 gallon						
	50	50.00 EA [N]		0.00+	108.73 =	226.59	0.00	5,663.09
415. LND	DFERT	+ Fertilizing						
	1000	1000.00 SF [N]		0.00+	0.13 =	0.98	0.00	130.98
416. LND	DMUL	+ Mulching						
	1000	1000.00 SF [N]		0.00+	0.86 =	60.45	0.00	920.45
Totals: Landscaping						1,539.05	0.00	95,562.80

Labor Minimums Applied



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

CAT	SEL	ACT DESCRIPTION	RESET	REMOVE	REPLACE	TAX	O&P	TOTAL
	CALC	QTY						
417. WDT	MN-A	+ Window treatment repair						
	1	1.00 EA		0.00+	43.20 =	0.00	8.64	51.84
Totals: Labor Minimums Applied						0.00	8.64	51.84
Line Item Totals: 1115_LACHMAN_APEX_2						20,437.35	154,112.50	1,378,112.98

Additional Charges	Charge
California Lumber Assessment Fee	67.55
Additional Charges Total	\$67.55

Grand Total Areas:

11,031.71	SF Walls	4,521.52	SF Ceiling	15,553.23	SF Walls and Ceiling
4,238.83	SF Floor	470.98	SY Flooring	1,226.66	LF Floor Perimeter
0.00	SF Long Wall	0.00	SF Short Wall	1,349.36	LF Ceil. Perimeter
4,238.83	Floor Area	4,907.27	Total Area	7,835.93	Interior Wall Area
7,110.09	Exterior Wall Area	987.54	Exterior Perimeter of Walls		
0.00	Surface Area	0.00	Number of Squares	0.00	Total Perimeter Length
0.00	Total Ridge Length	0.00	Total Hip Length		

Coverage	Item Total	%	ACV Total	%
Dwelling	1,006,331.83	73.02%	1,006,393.89	73.02%
Dwelling - Debris Removal	0.00	0.00%	0.00	0.00%
Dwelling - Code Upgrade	0.00	0.00%	0.00	0.00%
Dwelling - Extended Limit	0.00	0.00%	0.00	0.00%
Contents	0.00	0.00%	0.00	0.00%
Trees, Plants & Shrubs	95,562.80	6.93%	95,562.80	6.93%
Other Structures	276,218.35	20.04%	276,237.34	20.04%
Total	1,378,112.98	100.00%	1,378,194.03	100.00%



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Summary for Dwelling

Line Item Total	863,239.35
California Lumber Assessment Fee	51.72
Material Sales Tax	14,766.42
Subtotal	878,057.49
Overhead	64,168.20
Profit	64,168.20
Replacement Cost Value	\$1,006,393.89
Net Claim	\$1,006,393.89

Jared Boergadine
Executive Adjuster



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Summary for Trees, Plants & Shrubs

Line Item Total	94,023.75
Material Sales Tax	1,539.05
Replacement Cost Value	\$95,562.80
Less Amount Over Limit(s)	(31,887.80)
Net Claim	\$63,675.00

Jared Boergadine
Executive Adjuster



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Summary for Other Structures

Line Item Total	246,300.03
California Lumber Assessment Fee	15.83
Material Sales Tax	4,131.88
Subtotal	250,447.74
Overhead	12,894.80
Profit	12,894.80
Replacement Cost Value	\$276,237.34
Less Deductible	(3,000.00)
Less Amount Over Limit(s)	(145,887.34)
Net Claim	\$127,350.00

Jared Boergadine
Executive Adjuster



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Recap of Taxes, Overhead and Profit

	Overhead (10%)	Profit (10%)	Material Sales Tax (9.75%)	Storage Rental Tax (9.75%)
Line Items	77,056.25	77,056.25	20,437.35	0.00
Additional Charges	6.75	6.75	0.00	0.00
Total	77,063.00	77,063.00	20,437.35	0.00



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Recap by Room

Estimate: 1115_LACHMAN_APEX_2

General			42,522.26	3.53%
Coverage: Dwelling	100.00% =		42,522.26	
Area: Dwelling				
Electrical			74,632.17	6.20%
Coverage: Dwelling	100.00% =		74,632.17	
Plumbing			7,896.75	0.66%
Coverage: Dwelling	100.00% =		7,896.75	
HVAC			34,832.02	2.89%
Coverage: Dwelling	100.00% =		34,832.02	
Doors/Windows			209,044.11	17.37%
Coverage: Dwelling	100.00% =		209,044.11	
Appliances			40,152.37	3.34%
Coverage: Dwelling	100.00% =		40,152.37	
Area: Main Level			19,000.00	1.58%
Coverage: Dwelling	100.00% =		19,000.00	
Entry/Foyer			7,512.31	0.62%
Coverage: Dwelling	100.00% =		7,512.31	
Office			7,489.29	0.62%
Coverage: Dwelling	100.00% =		7,489.29	
Guest Bath			2,841.16	0.24%
Coverage: Dwelling	100.00% =		2,841.16	
Living Room/Dining Room			53,450.74	4.44%
Coverage: Dwelling	100.00% =		53,450.74	
Kitchen			47,783.79	3.97%
Coverage: Dwelling	100.00% =		47,783.79	
Hallway			30,432.77	2.53%
Coverage: Dwelling	100.00% =		30,432.77	
Master Bedroom			8,222.52	0.68%
Coverage: Dwelling	100.00% =		8,222.52	
M. Closet Hers			8,298.81	0.69%
Coverage: Dwelling	100.00% =		8,298.81	
M. Closet His			7,841.58	0.65%
Coverage: Dwelling	100.00% =		7,841.58	
Server Closet			644.82	0.05%
Coverage: Dwelling	100.00% =		644.82	
Master Bath			6,616.88	0.55%
Coverage: Dwelling	100.00% =		6,616.88	
Laundry Room			17,039.94	1.42%
Coverage: Dwelling	100.00% =		17,039.94	



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Bathroom 1		2,566.33	0.21%
Coverage: Dwelling	100.00% =	2,566.33	
Bedroom 1		9,006.16	0.75%
Coverage: Dwelling	100.00% =	9,006.16	
Bedroom 2		7,743.42	0.64%
Coverage: Dwelling	100.00% =	7,743.42	
Garage		14,285.91	1.19%
Coverage: Dwelling	100.00% =	14,285.91	
Area Subtotal: Main Level		250,776.43	20.84%
Coverage: Dwelling	100.00% =	250,776.43	
Area: Attic			
Attic Space		3,310.08	0.28%
Coverage: Dwelling	100.00% =	3,310.08	
Area Subtotal: Attic		3,310.08	0.28%
Coverage: Dwelling	100.00% =	3,310.08	
Area: Exterior - Main Structure		33,532.53	2.79%
Coverage: Dwelling	100.00% =	33,532.53	
Roof		74,000.00	6.15%
Coverage: Dwelling	100.00% =	74,000.00	
Ext_Surfaces		88,198.55	7.33%
Coverage: Dwelling	100.00% =	88,198.55	
Area Subtotal: Exterior - Main Structure		195,731.08	16.26%
Coverage: Dwelling	100.00% =	195,731.08	
Area Subtotal: Dwelling		816,375.01	67.83%
Coverage: Dwelling	100.00% =	816,375.01	
Other Structures		250,598.91	20.82%
Coverage: Dwelling	1.72% =	4,298.88	
Coverage: Other Structures	98.28% =	246,300.03	
Landscaping		94,023.75	7.81%
Coverage: Trees, Plants & Shrubs	100.00% =	94,023.75	
Labor Minimums Applied		43.20	
Coverage: Dwelling	100.00% =	43.20	
Subtotal of Areas		1,203,563.13	100.00%
Coverage: Dwelling	71.72% =	863,239.35	
Coverage: Trees, Plants & Shrubs	7.81% =	94,023.75	
Coverage: Other Structures	20.46% =	246,300.03	



Apex Public Adjusters, Inc.

550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

Total	1,203,563.13	100.00%
--------------	---------------------	----------------

**Apex Public Adjusters, Inc.**

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539

Recap by Category

O&P Items			Total	%
APPLIANCES			35,698.07	2.59%
Coverage: Dwelling	@	100.00% =	35,698.07	
AWNINGS & PATIO COVERS			12,003.80	0.87%
Coverage: Dwelling	@	100.00% =	12,003.80	
CABINETRY			41,153.02	2.99%
Coverage: Dwelling	@	100.00% =	41,153.02	
CLEANING			2,984.57	0.22%
Coverage: Dwelling	@	33.26% =	992.60	
Coverage: Other Structures	@	66.74% =	1,991.97	
CONCRETE & ASPHALT			4,443.26	0.32%
Coverage: Dwelling	@	13.18% =	585.56	
Coverage: Other Structures	@	86.82% =	3,857.70	
GENERAL DEMOLITION			36,153.60	2.62%
Coverage: Dwelling	@	69.69% =	25,195.00	
Coverage: Other Structures	@	30.31% =	10,958.60	
DOORS			11,773.66	0.85%
Coverage: Dwelling	@	100.00% =	11,773.66	
DRYWALL			802.58	0.06%
Coverage: Dwelling	@	100.00% =	802.58	
ELECTRICAL			7,157.62	0.52%
Coverage: Dwelling	@	100.00% =	7,157.62	
ELECTRICAL - SPECIAL SYSTEMS			6,674.21	0.48%
Coverage: Dwelling	@	100.00% =	6,674.21	
MISC. EQUIPMENT - COMMERCIAL			10,940.76	0.79%
Coverage: Other Structures	@	100.00% =	10,940.76	
HEAVY EQUIPMENT			1,440.00	0.10%
Coverage: Dwelling	@	100.00% =	1,440.00	
FLOOR COVERING - CERAMIC TILE			92,028.10	6.68%
Coverage: Dwelling	@	51.64% =	47,519.34	
Coverage: Other Structures	@	48.36% =	44,508.76	
FLOOR COVERING - WOOD			10,298.14	0.75%
Coverage: Dwelling	@	100.00% =	10,298.14	
FENCING			9,116.07	0.66%
Coverage: Other Structures	@	100.00% =	9,116.07	
FINISH CARPENTRY / TRIMWORK			56,562.75	4.10%
Coverage: Dwelling	@	100.00% =	56,562.75	
FINISH HARDWARE			1,537.73	0.11%
Coverage: Dwelling	@	100.00% =	1,537.73	
FIREPLACES			7,505.26	0.54%
Coverage: Dwelling	@	26.72% =	2,005.26	
Coverage: Other Structures	@	73.28% =	5,500.00	

**Apex Public Adjusters, Inc.**


550 N. Brand Blvd. Suite 950
Glendale CA 91203
866-379-9970 - www.ApexAdjusters.com
CA DOI Lic#2M66539

O&P Items				Total	%
FIRE PROTECTION SYSTEMS				313.29	0.02%
Coverage: Dwelling	@	100.00% =		313.29	
HEAT, VENT & AIR CONDITIONING				36,635.03	2.66%
Coverage: Dwelling	@	100.00% =		36,635.03	
INSULATION				2,801.50	0.20%
Coverage: Dwelling	@	100.00% =		2,801.50	
LABOR ONLY				29,086.50	2.11%
Coverage: Dwelling	@	100.00% =		29,086.50	
LIGHT FIXTURES				46,976.13	3.41%
Coverage: Dwelling	@	91.89% =		43,164.21	
Coverage: Other Structures	@	8.11% =		3,811.92	
MASONRY				4,003.29	0.29%
Coverage: Other Structures	@	100.00% =		4,003.29	
METAL STRUCTURES & COMPONENTS				894.17	0.06%
Coverage: Other Structures	@	100.00% =		894.17	
ORNAMENTAL IRON				8,170.88	0.59%
Coverage: Dwelling	@	52.61% =		4,298.88	
Coverage: Other Structures	@	47.39% =		3,872.00	
PLUMBING				2,553.62	0.19%
Coverage: Dwelling	@	87.76% =		2,241.09	
Coverage: Other Structures	@	12.24% =		312.53	
PAINTING				42,558.22	3.09%
Coverage: Dwelling	@	87.43% =		37,209.69	
Coverage: Other Structures	@	12.57% =		5,348.53	
ROOFING				32,000.00	2.32%
Coverage: Dwelling	@	100.00% =		32,000.00	
SPECIALTY ITEMS				19,224.88	1.39%
Coverage: Dwelling	@	27.66% =		5,317.70	
Coverage: Other Structures	@	72.34% =		13,907.18	
STUCCO & EXTERIOR PLASTER				91,844.76	6.66%
Coverage: Dwelling	@	93.71% =		86,068.21	
Coverage: Other Structures	@	6.29% =		5,776.55	
TILE				6,336.60	0.46%
Coverage: Dwelling	@	100.00% =		6,336.60	
TEMPORARY REPAIRS				2,360.00	0.17%
Coverage: Dwelling	@	100.00% =		2,360.00	
WINDOW TREATMENT				77,630.31	5.63%
Coverage: Dwelling	@	100.00% =		77,630.31	
O&P Items Subtotal				751,662.38	54.54%
Non-O&P Items				Total	%



**Apex Public Adjusters, Inc.**

550 N. Brand Blvd. Suite 950
 Glendale CA 91203
 866-379-9970 - www.ApexAdjusters.com
 CA DOI Lic#2M66539


Non-O&P Items				Total	%
CLEANING				6,400.00	0.46%
Coverage: Dwelling	@	100.00% =		6,400.00	
GENERAL DEMOLITION				47,422.40	3.44%
Coverage: Trees, Plants & Shrubs	@	100.00% =		47,422.40	
DRYWALL				19,000.00	1.38%
Coverage: Dwelling	@	100.00% =		19,000.00	
ELECTRICAL				29,560.00	2.14%
Coverage: Dwelling	@	100.00% =		29,560.00	
ELECTRICAL - SPECIAL SYSTEMS				43,100.00	3.13%
Coverage: Dwelling	@	100.00% =		43,100.00	
GLASS, GLAZING, & STOREFRONTS				32,800.00	2.38%
Coverage: Other Structures	@	100.00% =		32,800.00	
LANDSCAPING				46,601.35	3.38%
Coverage: Trees, Plants & Shrubs	@	100.00% =		46,601.35	
PLUMBING				6,860.00	0.50%
Coverage: Dwelling	@	100.00% =		6,860.00	
SWIMMING POOLS & SPAS				60,700.00	4.40%
Coverage: Other Structures	@	100.00% =		60,700.00	
WINDOWS - SLIDING PATIO DOORS				131,457.00	9.54%
Coverage: Dwelling	@	100.00% =		131,457.00	
EXTERIOR STRUCTURES				28,000.00	2.03%
Coverage: Other Structures	@	100.00% =		28,000.00	
Non-O&P Items Subtotal				451,900.75	32.79%
O&P Items Subtotal				751,662.38	54.54%
Permits and Fees				67.55	0.00%
Coverage: Dwelling	@	76.57% =		51.72	
Coverage: Other Structures	@	23.43% =		15.83	
Material Sales Tax				20,437.35	1.48%
Coverage: Dwelling	@	72.25% =		14,766.42	
Coverage: Trees, Plants & Shrubs	@	7.53% =		1,539.05	
Coverage: Other Structures	@	20.22% =		4,131.88	
Overhead				77,063.00	5.59%
Coverage: Dwelling	@	83.27% =		64,168.20	
Coverage: Other Structures	@	16.73% =		12,894.80	
Profit				77,063.00	5.59%
Coverage: Dwelling	@	83.27% =		64,168.20	
Coverage: Other Structures	@	16.73% =		12,894.80	
Total				1,378,194.03	100.00%

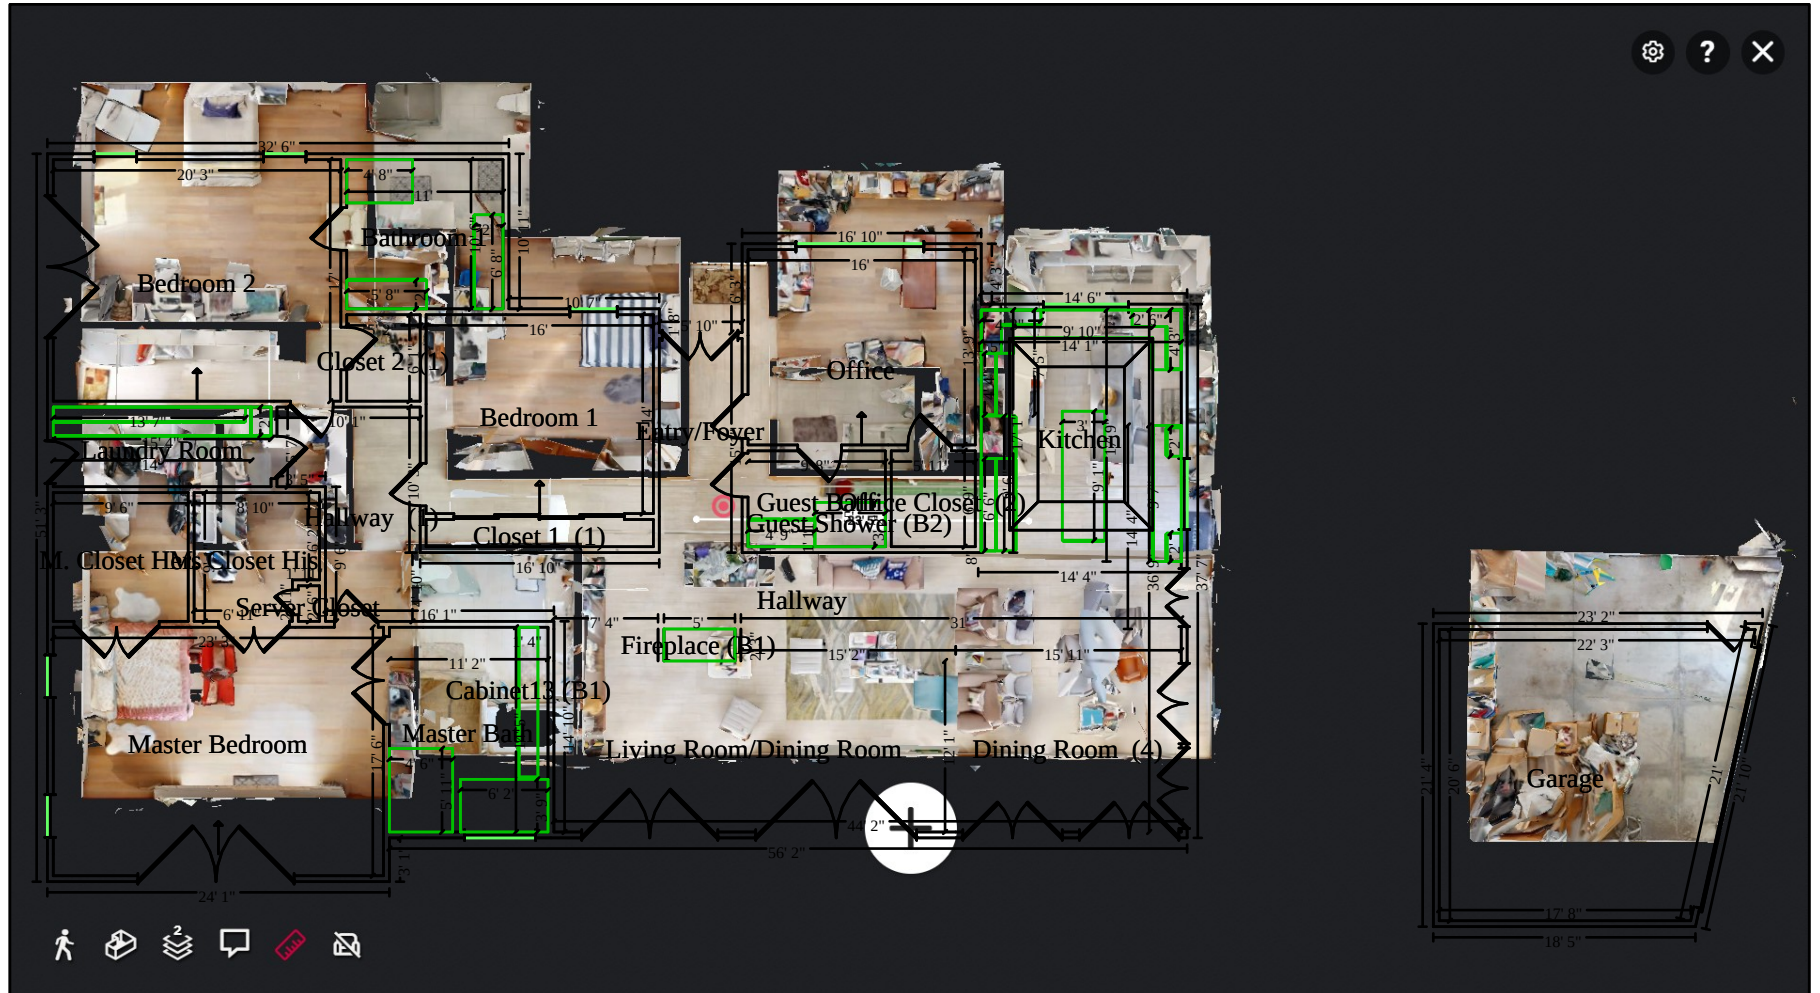

Main Level

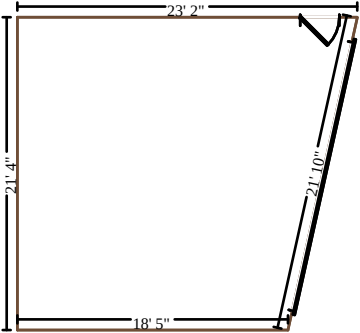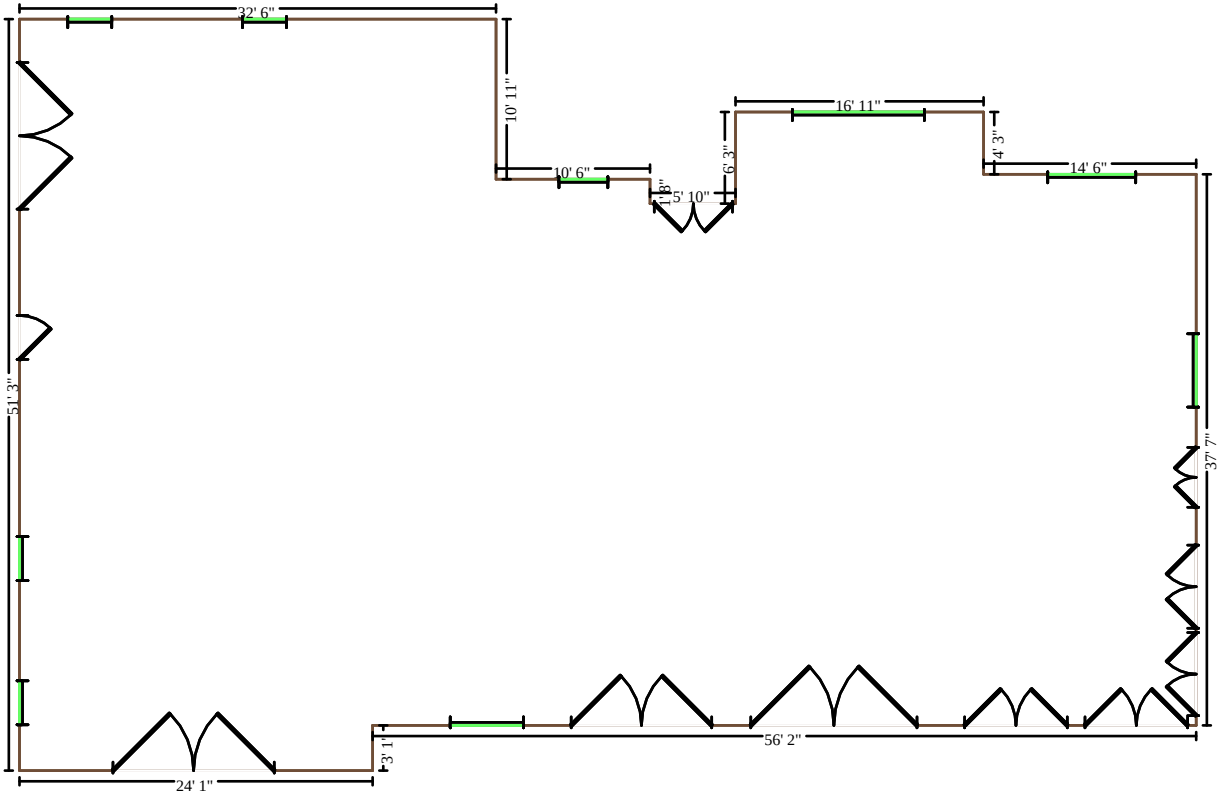

Exterior - Main Structure

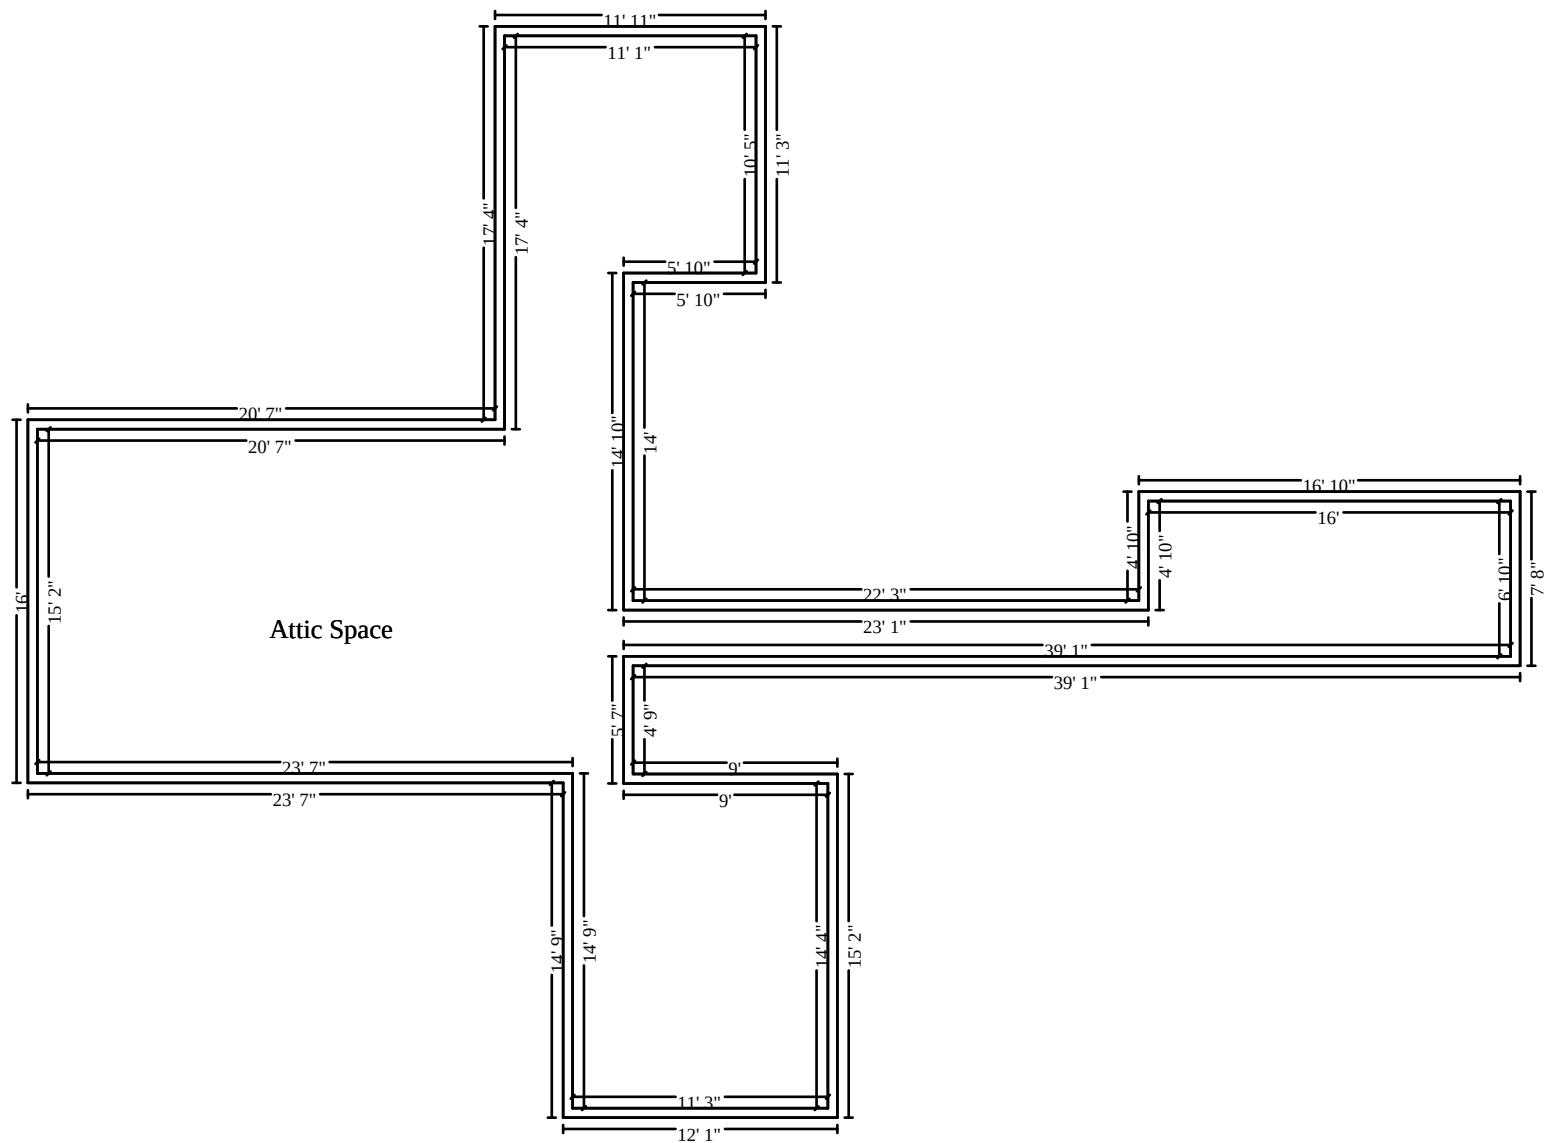

Attic